

Disassembly and Assembly

1104D Industrial Engine

NH (Engine)
NJ (Engine)

Important Safety Information

Most accidents that involve product operation, maintenance and repair are caused by failure to observe basic safety rules or precautions. An accident can often be avoided by recognizing potentially hazardous situations before an accident occurs. A person must be alert to potential hazards. This person should also have the necessary training, skills and tools to perform these functions properly.

Improper operation, lubrication, maintenance or repair of this product can be dangerous and could result in injury or death.

Do not operate or perform any lubrication, maintenance or repair on this product, until you have read and understood the operation, lubrication, maintenance and repair information.

Safety precautions and warnings are provided in this manual and on the product. If these hazard warnings are not heeded, bodily injury or death could occur to you or to other persons.

The hazards are identified by the "Safety Alert Symbol" and followed by a "Signal Word" such as "DANGER", "WARNING" or "CAUTION". The Safety Alert "WARNING" label is shown below.



The meaning of this safety alert symbol is as follows:

Attention! Become Alert! Your Safety is Involved.

The message that appears under the warning explains the hazard and can be either written or pictorially presented.

Operations that may cause product damage are identified by "NOTICE" labels on the product and in this publication.

Perkins cannot anticipate every possible circumstance that might involve a potential hazard. The warnings in this publication and on the product are, therefore, not all inclusive. If a tool, procedure, work method or operating technique that is not specifically recommended by Perkins is used, you must satisfy yourself that it is safe for you and for others. You should also ensure that the product will not be damaged or be made unsafe by the operation, lubrication, maintenance or repair procedures that you choose.

The information, specifications, and illustrations in this publication are on the basis of information that was available at the time that the publication was written. The specifications, torques, pressures, measurements, adjustments, illustrations, and other items can change at any time. These changes can affect the service that is given to the product. Obtain the complete and most current information before you start any job. Perkins dealers or Perkins distributors have the most current information available.



When replacement parts are required for this product Perkins recommends using Perkins replacement parts.

Failure to heed this warning can lead to premature failures, product damage, personal injury or death.

Table of Contents

Disassembly and Assembly Section

Fuel Priming Pump - Remove and Install (Electric Fuel Priming Pump)	5	Front Cover - Remove and Install	73
Fuel Priming Pump - Remove and Install (Manual Priming Pump)	6	Gear Group (Front) - Remove and Install	75
Fuel Filter Base - Remove and Install (Secondary Fuel Filter)	8	Idler Gear - Remove	78
Fuel Transfer Pump - Remove	9	Idler Gear - Remove	79
Fuel Transfer Pump - Install	11	Idler Gear - Remove	81
Fuel Manifold (Rail) - Remove and Install	13	Idler Gear - Install	82
Fuel Injection Lines - Remove	16	Idler Gear - Install	84
Fuel Injection Lines - Install	17	Idler Gear - Install	85
Fuel Injection Pump - Remove	18	Housing (Front) - Remove	87
Fuel Injection Pump - Install	21	Housing (Front) - Install	89
Fuel Injection Pump Gear - Remove	23	Accessory Drive - Remove	91
Fuel Injection Pump Gear - Install	25	Accessory Drive - Disassemble	92
Electronic Unit Injector - Remove	26	Accessory Drive - Assemble	92
Electronic Unit Injector - Install	30	Accessory Drive - Install	93
Turbocharger - Remove (Top Mounted Turbocharger)	35	Crankcase Breather - Remove and Install (Filtered Breather)	94
Turbocharger - Remove (Side Mounted Turbochargers)	37	Crankcase Breather - Remove and Install (Unfiltered Breather)	96
Turbocharger - Install (Top Mounted Turbocharger)	38	Valve Mechanism Cover - Remove and Install	96
Turbocharger - Install (Side Mounted Turbochargers)	40	Valve Mechanism Cover Base - Remove and Install	98
Wastegate Solenoid - Remove and Install	41	Rocker Shaft and Pushrod - Remove	101
Exhaust Manifold - Remove and Install (Top Mounted Exhaust Manifold)	42	Rocker Shaft - Disassemble	102
Exhaust Manifold - Remove and Install (Side Mounted Exhaust Manifold)	44	Rocker Shaft - Assemble	103
Exhaust Elbow - Remove and Install	45	Rocker Shaft and Pushrod - Install	104
Inlet and Exhaust Valve Springs - Remove and Install	46	Cylinder Head - Remove	105
Inlet and Exhaust Valves - Remove and Install	50	Cylinder Head - Install	109
Engine Oil Filter Base - Remove and Install	52	Lifter Group - Remove and Install	112
Engine Oil Cooler - Remove	54	Camshaft - Remove and Install	113
Engine Oil Cooler - Install	55	Camshaft Gear - Remove and Install	115
Engine Oil Relief Valve - Remove and Install (Engines with a Balancer Unit)	56	Camshaft Bearings - Remove and Install	117
Engine Oil Relief Valve - Remove and Install (Engines Without a Balancer Unit)	57	Engine Oil Pan - Remove and Install (Aluminum and Pressed Steel Oil Pans)	119
Engine Oil Pump - Remove and Install (Engines Without a Balancer Unit)	58	Engine Oil Pan - Remove and Install (Cast Iron Oil Pan)	121
Water Pump - Remove	61	Balancer - Remove	124
Water Pump - Install	62	Balancer - Install	126
Water Temperature Regulator - Remove and Install	63	Piston Cooling Jets - Remove and Install	129
Flywheel - Remove	64	Pistons and Connecting Rods - Remove	130
Flywheel - Install	65	Pistons and Connecting Rods - Disassemble	131
Crankshaft Rear Seal - Remove	66	Pistons and Connecting Rods - Assemble	132
Crankshaft Rear Seal - Install	67	Pistons and Connecting Rods - Install	134
Flywheel Housing - Remove and Install	68	Connecting Rod Bearings - Remove (Connecting rods in position)	136
Crankshaft Pulley - Remove and Install (Engines With an Automatic Belt Tensioner)	70	Connecting Rod Bearings - Install (Connecting rods in position)	137
Crankshaft Pulley - Remove and Install (Engines Without an Automatic Belt Tensioner)	71	Crankshaft Main Bearings - Remove and Install (Crankshaft in position)	139
Crankshaft Front Seal - Remove and Install	72	Crankshaft - Remove	143
		Crankshaft - Install	146
		Crankshaft Timing Ring - Remove and Install	149
		Crankshaft Gear - Remove and Install	150
		Bearing Clearance - Check	152
		Crankshaft Position Sensor - Remove and Install	153
		Position Sensor (Fuel Injection Pump) - Remove and Install	153
		Coolant Temperature Sensor - Remove and Install	154
		Engine Oil Pressure Sensor - Remove and Install	156
		Fuel Pressure Sensor - Remove and Install	157
		Boost Pressure Sensor - Remove and Install	158

Inlet Air Temperature Sensor - Remove and Install	159
Glow Plugs - Remove and Install	160
V-Belts - Remove and Install (Engines Without an Automatic Belt Tensioner)	161
Alternator Belt - Remove and Install (Engines With an Automatic Belt Tensioner)	162
Fan - Remove and Install	163
Fan Drive - Remove and Install	164
Electronic Control Module - Remove and Install ..	165
ECM Mounting Bracket - Remove and Install	168
Alternator - Remove (Engines Without an Automatic Belt Tensioner)	169
Alternator - Remove (Engines With an Automatic Belt Tensioner)	170
Alternator - Install (Engines Without an Automatic Belt Tensioner)	170
Alternator - Install (Engines With an Automatic Belt Tensioner)	171
Electric Starting Motor - Remove and Install	171
Air Compressor - Remove and Install	172
Vacuum Pump - Remove and Install	177

Index Section

Index	178
-------------	-----

Disassembly and Assembly Section

i02933646

Fuel Priming Pump - Remove and Install (Electric Fuel Priming Pump)

Removal Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.
2. Turn the battery disconnect switch to the OFF position.

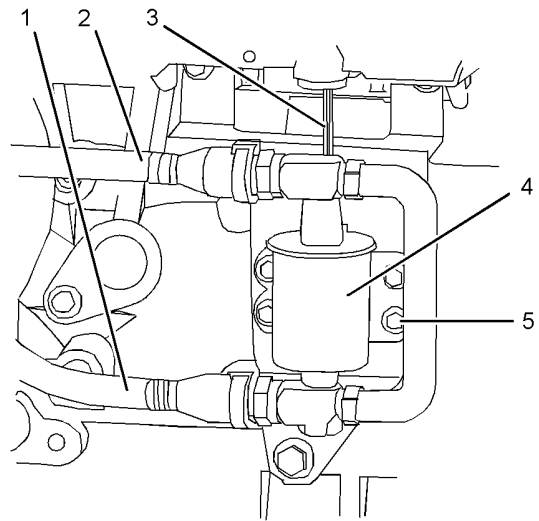


Illustration 1

g01269003

Typical example

3. Disconnect harness assembly (3) from electric priming pump (4).
 4. Disconnect plastic tube assembly (1) and plastic tube assembly (2) from electric priming pump (4).
- Note:** If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies and the electric priming pump are plugged.
5. Remove bolts (5) from electric priming pump (4).
 6. Remove electric priming pump (4) from the mounting bracket.

Installation Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

i02933647

1. Ensure that the electric priming pump is clean and free from wear or damage. If necessary, replace the electric priming pump.

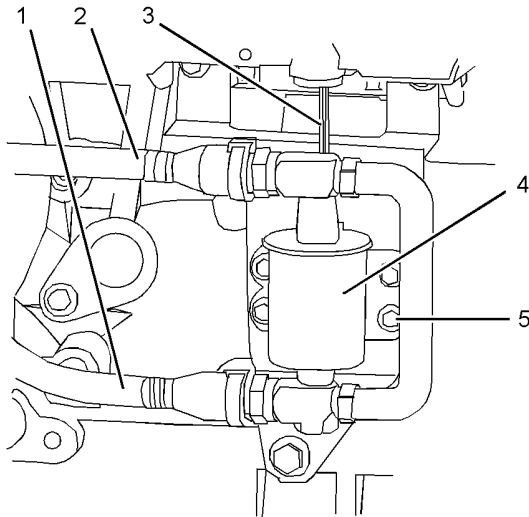


Illustration 2

g01269003

Typical example

2. Position electric priming pump (4) on the mounting bracket. Install bolts (5) to the electric priming pump.
 3. Tighten bolts (5) to a torque of 9 N·m (79 lb in).
 4. Remove all plugs from plastic tube assembly (1), plastic tube assembly (2) and electric priming pump (4). Connect plastic tube assembly (1) and plastic tube assembly (2) to electric priming pump (4).
- Note:** If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are connected.
5. Connect harness assembly (3) to electric priming pump (4).
 6. Turn the fuel supply to the ON position.
 7. Turn the battery disconnect switch to the ON position.
 8. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

Fuel Priming Pump - Remove and Install (Manual Priming Pump)

Removal Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

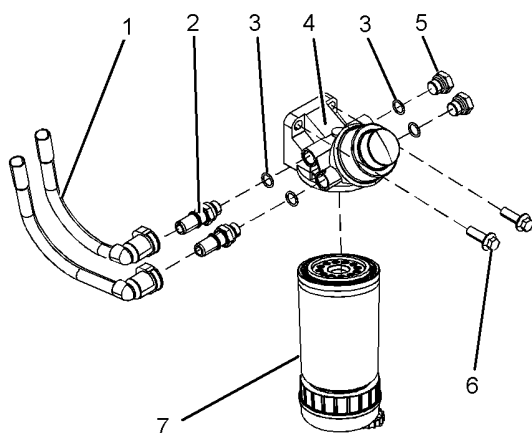


Illustration 3

g01753133

Typical example

1. Turn the fuel supply to the OFF position.
2. Drain primary filter (7). Refer to Operation and Maintenance Manual, "Fuel System Primary Filter (Water Separator) Element - Replace".
3. Disconnect plastic tube assemblies (1).

Note: If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are plugged.

4. Remove primary filter (7) from fuel priming pump (4). Refer to Operation and Maintenance Manual, "Fuel System Primary Filter (Water Separator) Element - Replace".
5. Remove bolts (6) from fuel priming pump (4). Remove fuel priming pump (4) from the mounting bracket.
6. If necessary, follow Step 6.a through Step 6.c in order to disassemble the fuel priming pump.
 - a. Remove connectors (2) from fuel priming pump (4).
 - b. Remove plugs (5) from fuel priming pump (4).
 - c. Remove O-ring seals (3) from connectors (2) and plugs (5).

Installation Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

1. Ensure that the fuel priming pump is clean and free from wear or damage. If necessary, replace the fuel priming pump.

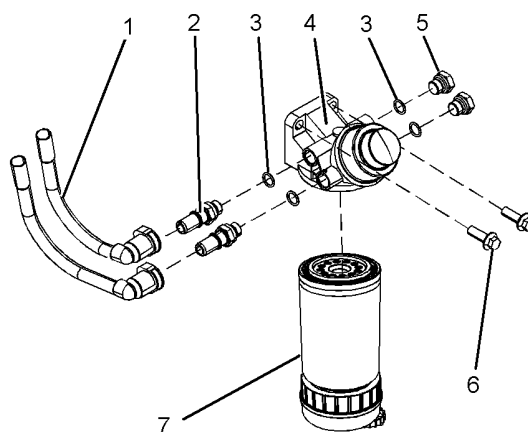


Illustration 4

g01753133

Typical example

2. If necessary, follow Step 2.a through Step 2.d in order to assemble fuel priming pump (4).
 - a. Install new O-ring seals (3) to connectors (2) and plugs (5).
 - b. Install connectors (2) to fuel priming pump (4).
 - c. Install plugs (5) to fuel priming pump (4).
 - d. Tighten the plugs and the connectors to a torque of 20 N·m (14 lb ft).

3. Position fuel priming pump (4) on the mounting bracket. Install bolts (6) to the fuel priming pump . Tighten the bolts to a torque of 44 N·m (32 lb ft).
 4. Remove plugs from plastic tube assemblies (1). Connect plastic tube assemblies (1) to connectors (2).
- Note:** If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are connected.
5. Install a new primary filter (7) to fuel priming pump (4). Refer to Operation and Maintenance Manual, "Fuel System Primary Filter (Water Separator) Element - Replace".
 6. Turn the fuel supply to the ON position.
 7. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

i02933636

Fuel Filter Base - Remove and Install (Secondary Fuel Filter)

Removal Procedure

Table 1

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Strap Wrench	1

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.
2. If necessary, remove the boost pressure sensor. Refer to Disassembly and Assembly, "Boost Pressure Sensor - Remove and Install".

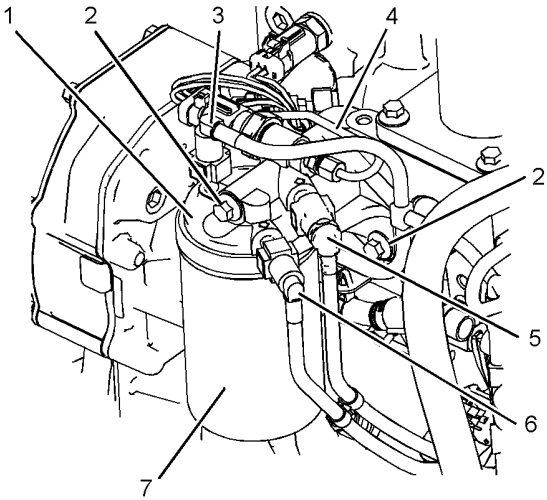


Illustration 5

g01247416

Typical example

3. Disconnect plastic tube assemblies (3), (5) and (6) from fuel filter base (1).

Note: If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies and the fuel filter base are plugged.

4. Remove tube assembly (4), if equipped.
5. Use Tooling (A) in order to remove fuel filter (7). Refer to Operation and Maintenance Manual, "Fuel System Secondary Filter - Replace".

6. Remove bolts (2) from fuel filter base (1). Remove the fuel filter base from the cylinder head.

Note: Do not attempt to disassemble the fuel filter base.

Installation Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

1. Ensure that the fuel filter base is clean and free from damage. If necessary, replace the complete fuel filter base assembly.

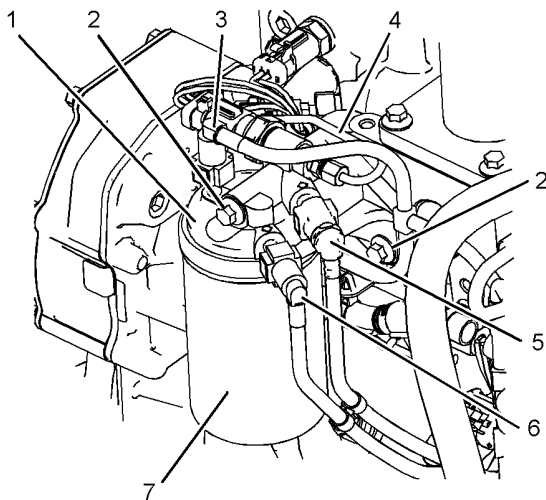


Illustration 6

g01247416

Typical example

2. Position fuel filter base (1) onto the cylinder head. Install bolts (2). Tighten the bolts to a torque of 22 N·m (16 lb ft).
3. Install a new fuel filter (7) to fuel filter base (1). Refer to Operation and Maintenance Manual, "Fuel System Secondary Filter - Replace" for the correct procedure.

4. If necessary, install the boost pressure sensor. Refer to Disassembly and Assembly, "Boost Pressure Sensor - Remove and Install".

5. Install tube assembly (4), if equipped. Tighten the nuts to a torque of 9 N·m (80 lb in).

NOTICE

Ensure that the plastic tube assemblies are installed in the original positions. Failure to connect the plastic tube assemblies to the correct ports will allow contamination to enter the fuel system. Contaminated fuel will cause serious damage to the engine.

6. Remove plugs from plastic tube assemblies (3), (5), and (6) and fuel filter base (1). Connect plastic tube assemblies (3), (5) and (6) to fuel filter base (1).

Note: If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are connected.

7. Turn the fuel supply to the ON position.
8. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

i02933650

Fuel Transfer Pump - Remove

Removal Procedure

Start By:

- a. Remove the mounting bracket for the electronic control module. Refer to Disassembly and Assembly, "ECM Mounting Bracket - Remove and Install".

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.
2. If necessary, disconnect the hose for the crankcase breather from the clip that secures the hose to the engine oil pan. Position the hose away from the fuel transfer pump.

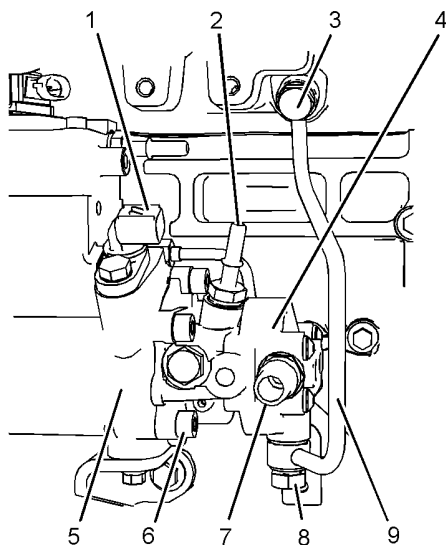


Illustration 7

g01247425

Typical example

3. If necessary, disconnect the harness assembly from position sensor (1). Refer to Disassembly and Assembly, "Position Sensor (Fuel Injection Pump) - Remove and Install". Position the harness assembly away from the fuel transfer pump.

Note: If the tube assembly has quick fit connections, ensure that the connections are clean before the tube assembly is plugged.

4. Disconnect the plastic tube assembly from inlet connection (7) on the fuel transfer pump.

5. Remove the plastic tube assembly from outlet connection (2).
6. Remove outlet connection (2) from fuel transfer pump (4). Plug the open port in the fuel transfer pump immediately with a new plug. Remove the O-ring seal from the connection.

If necessary, remove inlet connection (7) from fuel transfer pump (4). Plug the open port in the fuel transfer pump immediately with a new plug. Remove the O-ring seal from the connection.

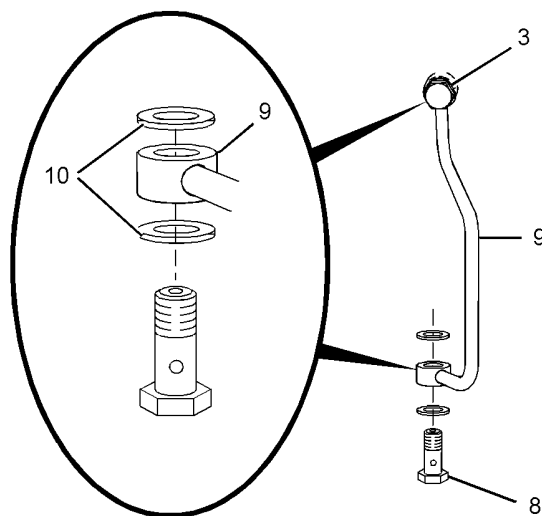


Illustration 8

g01457480

7. Loosen banjo bolt (3) and banjo bolt (8). Remove tube assembly (9) for the fuel return from the cylinder head to the fuel transfer pump.

Note: Disconnect the tube assembly at the fuel transfer pump first in order to drain the fuel from the cylinder head.

8. Remove banjo bolt (3) and sealing washers (10) from tube assembly (9).
9. Remove banjo bolt (8) and sealing washers (10) from tube assembly (9).
10. Use an allen wrench with a ball end in order to remove allen head bolts (6) that secure fuel transfer pump (4) to fuel injection pump (5).

i02933648

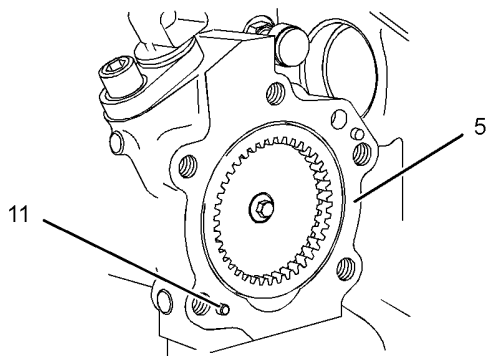


Illustration 9

g01254881

- 11.** Remove the fuel transfer pump from fuel injection pump (5).

Note: Do not remove dowels (11) from the fuel injection pump.

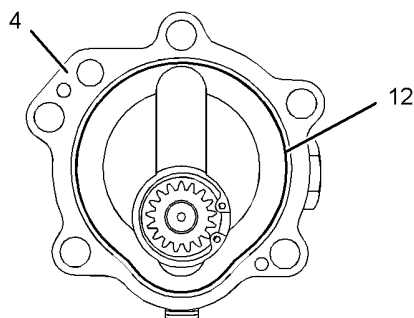


Illustration 10

g01254883

- 12.** Remove O-ring seal (12) from fuel transfer pump (4).

Fuel Transfer Pump - Install

Installation Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

1. Ensure that the faces of the fuel injection pump and the fuel transfer pump are clean and free from damage. Replace any components that are damaged.

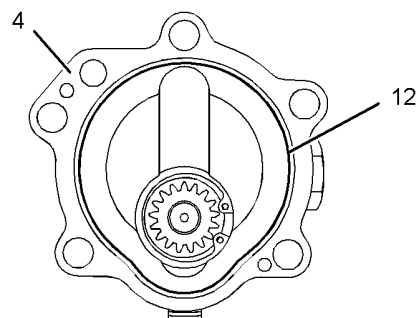


Illustration 11

g01254883

2. Install a new O-ring seal (12) for fuel transfer pump (4).

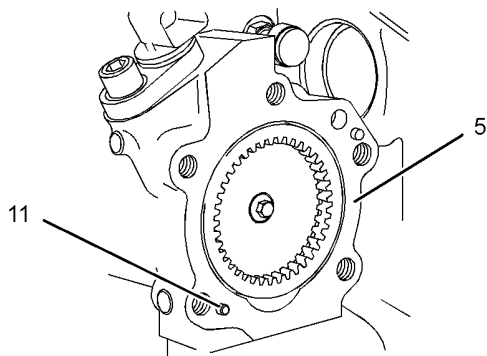


Illustration 12

g01254881

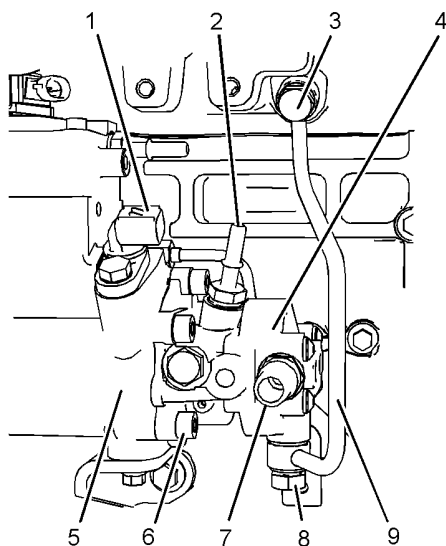


Illustration 13

g01247425

3. Align fuel transfer pump (4) with dowels (11) in fuel injection pump (5). Install the fuel transfer pump to the fuel injection pump.
4. Use an allen wrench with a ball end to install allen head bolts (6). Tighten the allen head bolts to a torque of 30 N·m (22 lb ft).
5. Install a new O-ring seal to outlet connection (2). Install outlet connection (2) to fuel transfer pump (4). Tighten the connection to torque of 15 N·m (11 lb ft).

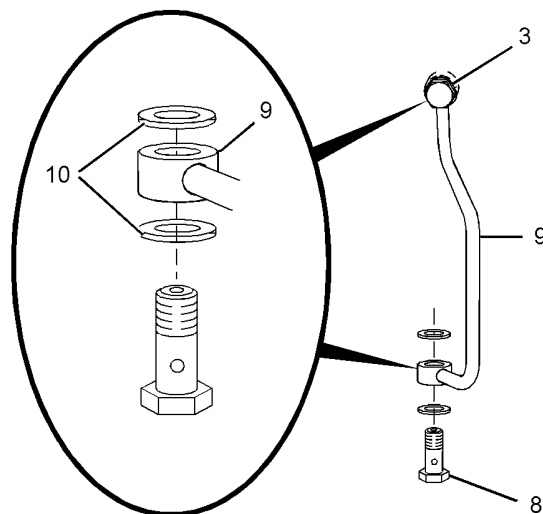


Illustration 14

g01457480

6. Install banjo bolt (8) and new sealing washers (10) to tube assembly (9).
7. Install banjo bolt (3) and new sealing washers (10) to tube assembly (9).
8. Install tube assembly (9) to the fuel return to fuel transfer pump (4) and to the cylinder head. Tighten banjo bolt (3) and banjo bolt (8) to a torque of 22 N·m (16 lb ft).
9. If necessary, install a new O-ring seal to inlet connection (7). Install inlet connection (7) to fuel transfer pump (4). Tighten the connection to torque of 15 N·m (11 lb ft).

Note: If the tube assembly has quick fit connections, ensure that the connections are clean before the tube assembly is connected.

10. Install the plastic tube assembly to outlet connection (2) on the fuel transfer pump.
11. Install the plastic tube assembly to inlet connection (7) on the fuel transfer pump.
12. If necessary, connect the harness assembly to position sensor (1). Slide the locking tab into the locked position.
13. If necessary, connect the hose for the crankcase breather to the clip that secures the hose to the engine oil pan.
14. Install the mounting bracket for the electronic control module. Refer to Disassembly and Assembly, "ECM Mounting Bracket - Remove and Install".

15. Install the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".
16. Turn the fuel supply to the ON position.
17. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

i02933644

Fuel Manifold (Rail) - Remove and Install

Removal Procedure

Start By:

- a. Remove the fuel injection lines. Refer to Disassembly and Assembly, "Fuel Injection Lines - Remove".



WARNING

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

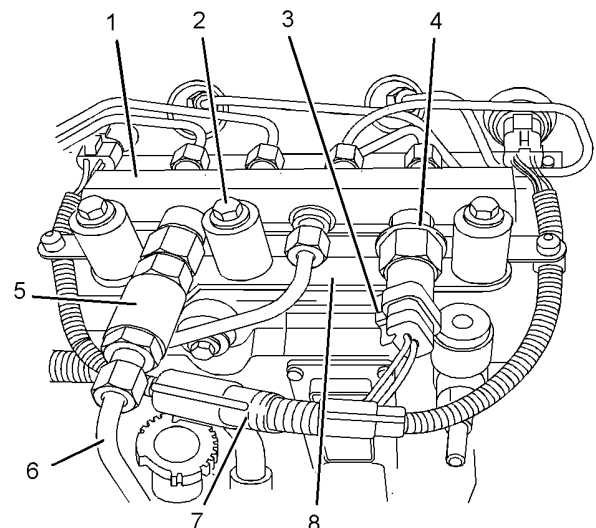


Illustration 15

g01243702

The fuel manifold is shown with fuel injection lines in position.

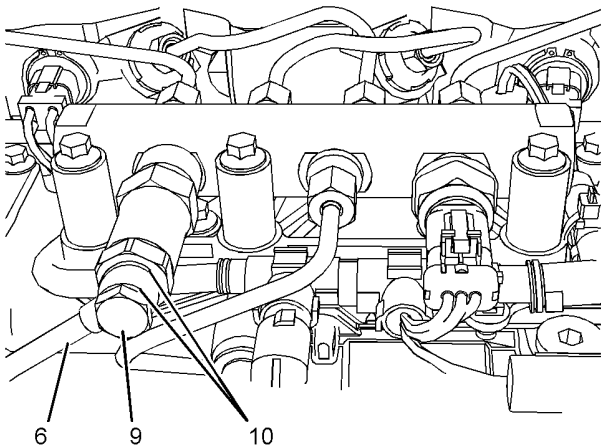


Illustration 16
The fuel manifold is shown with fuel injection lines in position.

1. If necessary, remove fuel pressure sensor (4). Refer to Disassembly and Assembly, "Fuel Pressure Sensor - Remove and Install".
2. If fuel pressure sensor (4) does not require removal, slide locking tab (3) into the unlocked position. Disconnect the plug on harness assembly (7) from fuel pressure sensor (4).
3. Disconnect tube assembly (6) from fuel pressure relief valve (5). The tube assembly can be secured with a nut or with a banjo bolt. Immediately cap the open port in the pressure relief valve with a new cap. Immediately plug the open end of the tube assembly with a new plug.
4. If tube assembly (6) is secured with a banjo bolt, remove banjo bolt (9) and sealing washers (10). Refer to Illustration 16.

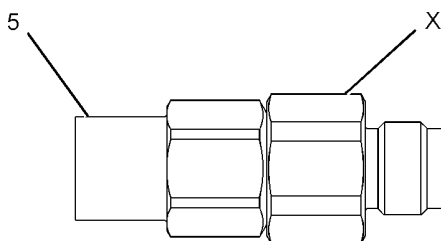


Illustration 17

5. If necessary, remove fuel pressure relief valve (5). Use a deep socket in order to remove the fuel pressure relief valve.

Note: The fuel pressure relief valve should only be removed at Position (X). The fuel pressure relief valve is a two-piece assembly which should not be disassembled.

6. Remove bolts (2) from fuel manifold (1). Note the position of any brackets that are secured by the bolts.
7. Remove fuel manifold (1) from mounting bracket (8).
8. If necessary, remove the bolts and remove mounting bracket (8).

Installation Procedure

Table 2

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610294	Injector Pipe Nut Tool	1

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

1. Ensure that all ports on the fuel manifold are capped. Ensure that the fuel manifold is externally clean and free from damage.

Note: Do not install a fuel manifold that has not been capped. All caps must be left in place until the fuel injection lines or the fuel pressure sensor are installed.

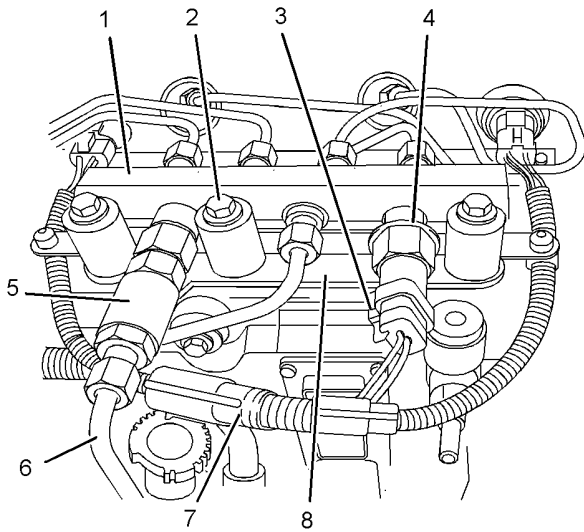


Illustration 18

g01243702

The fuel manifold is shown with fuel injection lines in position.

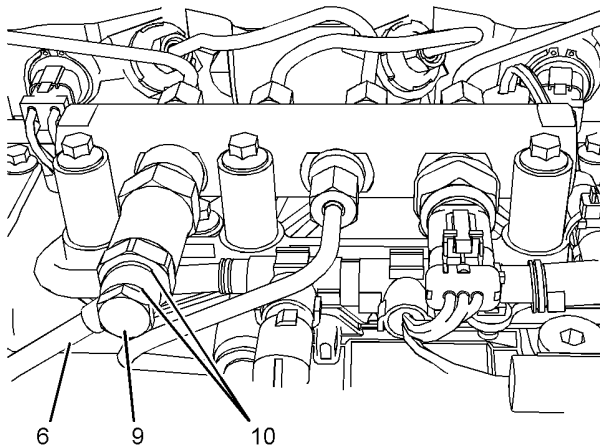


Illustration 19

g01763053

The fuel manifold is shown with fuel injection lines in position.

2. If necessary, install mounting bracket (8) and install the bolts. Tighten the bolts to a torque of 22 N·m (16 lb ft).
3. Position fuel manifold (1) onto mounting bracket (8). Install bolts (2) to the fuel manifold finger tight. Ensure that any brackets that are secured by bolts (2) are installed in the correct position.
4. Loosely install a new set of fuel injection lines. Refer to Disassembly and Assembly, "Fuel Injection Lines - Install" for more information.
5. Tighten bolts (2) to a torque of 22 N·m (16 lb ft).

6. Use Tooling (A) to tighten the nuts on the fuel injection lines to a torque of 30 N·m (22 lb ft). Refer to Disassembly and Assembly, "Fuel Injection Lines - Install" for more information.

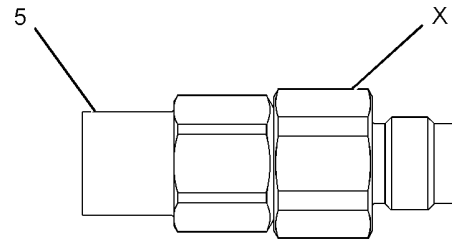


Illustration 20

g01800633

7. If necessary, install a new fuel pressure relief valve (5). Use a deep socket in order to tighten the fuel pressure relief valve. Tighten the fuel pressure relief valve to a torque of 120 N·m (89 lb ft).

Note: Fuel pressure relief valve (5) must only be tightened at Position (X). The fuel pressure relief valve is a two-piece assembly which should not be disassembled.

8. Remove the plug from tube assembly (6). Remove the cap from the appropriate port in fuel manifold (1). Connect tube assembly (6) to fuel pressure relief valve (5). If tube assembly (6) is secured with a nut, tighten the nut to a torque of 26 N·m (19 lb ft). Refer to Illustration 18.
9. If tube assembly (6) is secured with a banjo bolt, install new sealing washers (10) and install banjo bolt (9). Tighten the banjo bolt to a torque of 21 N·m (186 lb in).
10. If fuel pressure sensor (4) was removed from fuel manifold (1), install a new sealing washer and install the fuel pressure sensor. Refer to Disassembly and Assembly, "Fuel Pressure Sensor - Remove and Install" for more information.

If fuel pressure sensor (4) was not removed from fuel manifold (1), connect the plug on harness assembly (7) to fuel pressure sensor (4). Slide locking tab (3) into the locked position.

11. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime" for more information.

i02933638

Fuel Injection Lines - Remove

Removal Procedure

Table 3

Required Tools			
Tool	Part Number	Part Description	Qty
A	U5MK1124	Cap Kit	1

WARNING

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.

2. Turn the battery disconnect switch to the OFF position.

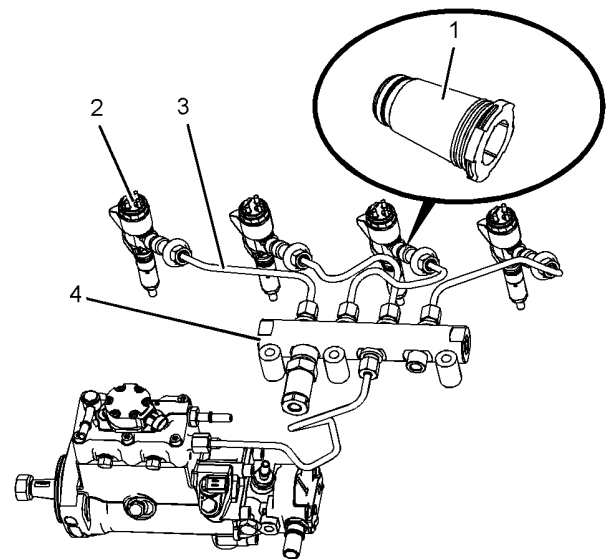


Illustration 21

g01457355

Typical example

3. Disconnect fuel injection line (3) from electronic unit injector (2).
4. Disconnect fuel injection line (3) from fuel manifold (4).
5. Remove fuel injection line (3). Discard the fuel injection line.
6. Plug the open port in fuel manifold (4) immediately. Use Tooling (A) in order to plug the open port.
7. Remove seal (1) from electronic unit injector (2) and from the base of the valve mechanism cover.
8. Use a new plug in order to plug the open port in electronic unit injector (2). Use Tooling (A) in order to plug the open port.
9. Repeat Step 3 through Step 8 in order to remove the remaining fuel injection lines from the electronic unit injectors.
10. If necessary, remove the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".
11. Remove the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".

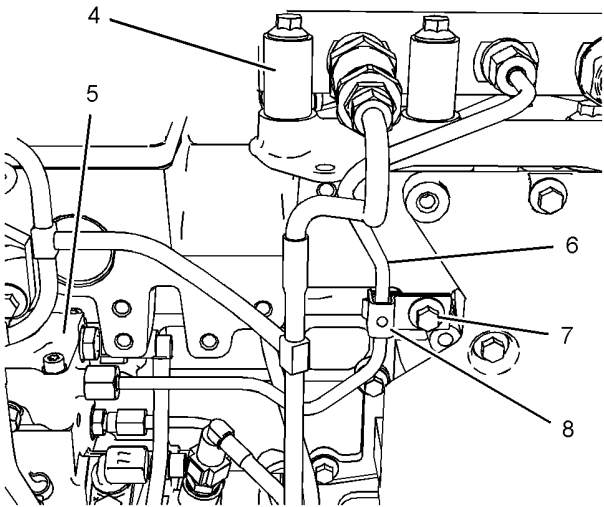


Illustration 22
Typical example

12. Remove bolt (7) from clip (8).
13. Disconnect fuel injection line (6) from fuel injection pump (5).
14. Disconnect fuel injection line (6) from fuel manifold (4).
15. Remove fuel injection line (6). Discard the fuel injection line. Plug all open ports immediately. Use Tooling (A) in order to plug the open ports in the fuel manifold and in the fuel injection pump.

i02933637

Fuel Injection Lines - Install

Installation Procedure

Table 4

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610294	Injector Pipe Nut Tool	1

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

Note: The following procedure should be adopted in order to install the fuel injection lines when the electronic unit injectors or the fuel manifold have not been removed. If the electronic unit injectors or the fuel manifold have been removed, refer to Disassembly and Assembly, "Electronic Unit Injector - Install" and Disassembly and Assembly, "Fuel Manifold (Rail) - Remove and Install" for more information.

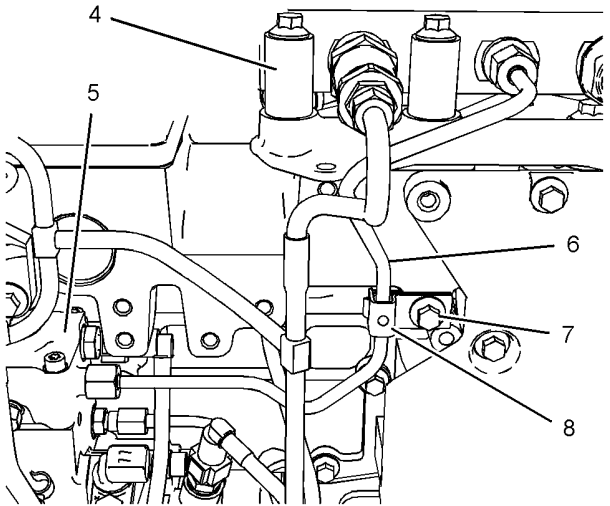


Illustration 23
Typical example

1. Remove the caps from the port in fuel injection pump (5) and from the appropriate port in fuel manifold (4). Remove the caps from the new fuel injection line (6).
2. Loosely connect the nuts at both ends of fuel injection line (6), to fuel manifold (4) and to fuel injection pump (5). Ensure that the ends of the fuel injection line are correctly seated in the fuel injection pump and in the fuel manifold.

3. Use Tooling (B) to tighten the nuts on fuel injection line (6) to a torque of 30 N·m (22 lb ft).
4. Install bolt (7) to clip (8). Tighten bolt (7) to a torque of 22 N·m (16 lb ft).

Ensure that fuel injection line does not contact any other engine component.

5. Install the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".
6. If necessary, install the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".

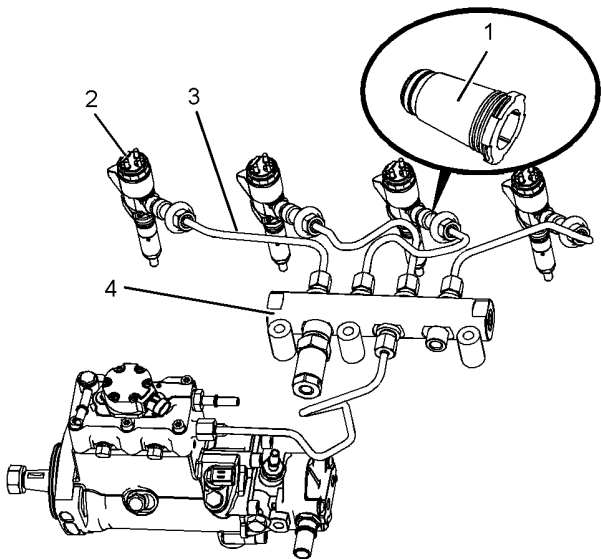


Illustration 24
Typical example

g01457387

8. Remove the caps from the new fuel injection line (3).

Note: Ensure that a dust seal is installed to the fuel injection line. Install the fuel injection line for number one cylinder first. Install the fuel injection lines in numerical order.

9. Remove the caps from electronic unit injector (2) and from the appropriate port in fuel manifold (4).
10. Loosely connect the nuts at both ends of fuel injection line (3), to electronic unit injector (2) and to the appropriate port in fuel manifold (4). Ensure that the ends of the fuel injection line are correctly seated in the electronic unit injector and in the fuel manifold.

11. Use Tooling (B) to tighten the nuts on fuel injection line (3) to a torque of 30 N·m (22 lb ft). Ensure that the dust seal is seated correctly against seal (1).

12. Follow Step 7 through Step 11 in order to install the remaining fuel injection lines.

Note: Ensure that fuel injection lines do not contact any other engine component.

13. Turn the fuel supply to the ON position.
14. Turn the battery disconnect switch to the ON position.
15. Remove the air from the fuel system. Refer to Operations and Maintenance Manual, "Fuel System - Prime".

i03458261

Fuel Injection Pump - Remove

Removal Procedure

Table 5

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1
D	U5MK1124	Cap Kit	1

⁽¹⁾ Install Tooling to the front pulley.

⁽²⁾ Install Tooling into the aperture for the electric starting motor.

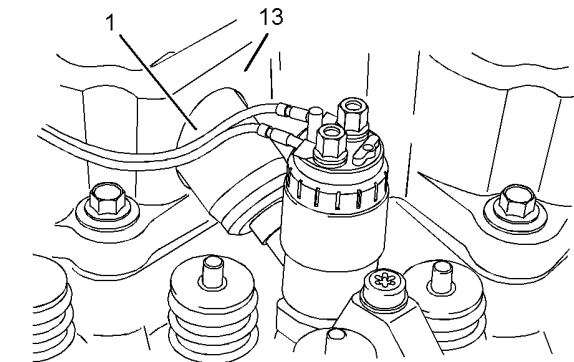


Illustration 25
Typical example

g01271377

The valve mechanism cover is not shown for clarity.

7. Install a new seal (1) to electronic unit injector (2) and to valve mechanism cover base (13).

Note: Ensure that the flange on the seal is flush with the valve mechanism cover base.

Start By:

- a. Remove the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".
- b. Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

 WARNING

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.
2. Turn the battery disconnect switch to the OFF position.

3. If necessary, remove the fuel filter base. Refer to Disassembly and Assembly, "Fuel Filter Base - Remove and Install".
4. If necessary, remove the fuel priming pump. Refer to Disassembly and Assembly, "Fuel Priming Pump - Remove and Install".
5. If necessary, remove the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".
6. Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".
7. Use Tooling (B) in order to lock the camshaft in the correct position. Use Tooling (C) in order to lock the crankshaft in the correct position. Refer to Disassembly and Assembly, "Gear Group (Front) - Remove and Install" for the correct procedure.
8. Remove the backlash from the fuel pump gear. Lock the fuel injection pump in the correct position and remove the fuel pump gear. Refer to Disassembly and Assembly, "Fuel Pump Gear - Remove" for the correct procedure.

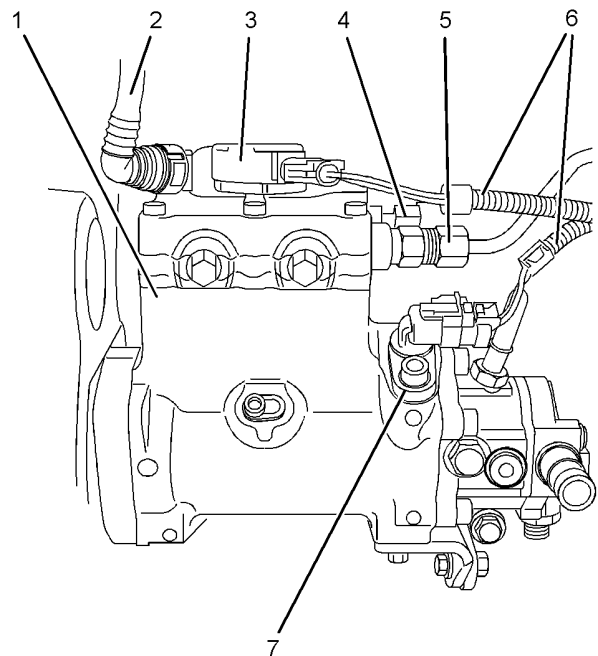


Illustration 26
Typical example

g01563275

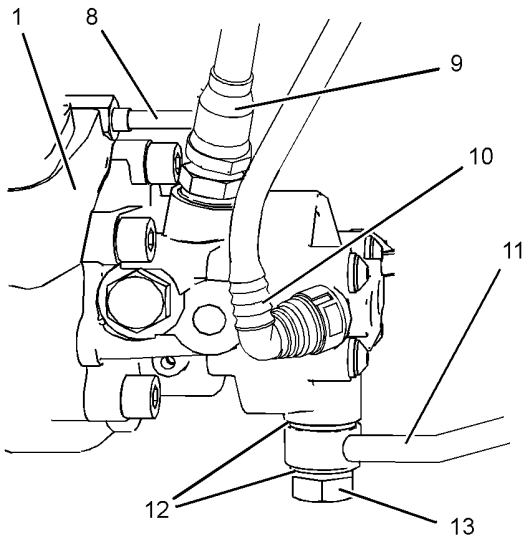


Illustration 27

g01563276

Typical example

9. Disconnect plastic tube assembly (2) from fuel injection pump (1).
10. Disconnect harness assembly (6) from solenoid (3). Slide the locking tab into the unlocked position and disconnect harness assembly (6) from position sensor (7).

Note: The harness assembly should be positioned in order to avoid an obstruction to the fuel injection pump.

11. Disconnect plastic tube assembly (10) from fuel injection pump (1).
12. Disconnect plastic tube assembly (9) from fuel injection pump (1).
13. Disconnect plastic tube assembly (4) from fuel injection pump (1).
14. Remove banjo bolt (13) and remove sealing washers (12).
15. Plug or cap all open ports and tube assemblies immediately with new plugs or caps.

Note: Ensure that quick fit connections are clean before the tube assemblies are plugged.

16. Remove fuel injection line (5). Refer to Disassembly and Assembly, "Fuel Injection Lines - Remove". Use Tooling (D) in order to plug the open ports in the fuel injection pump and in the fuel manifold. Discard the fuel injection line.

17. Remove tube assembly (8) for the engine oil supply to the fuel injection pump. Remove the banjo bolt and the sealing washers from the tube assembly.

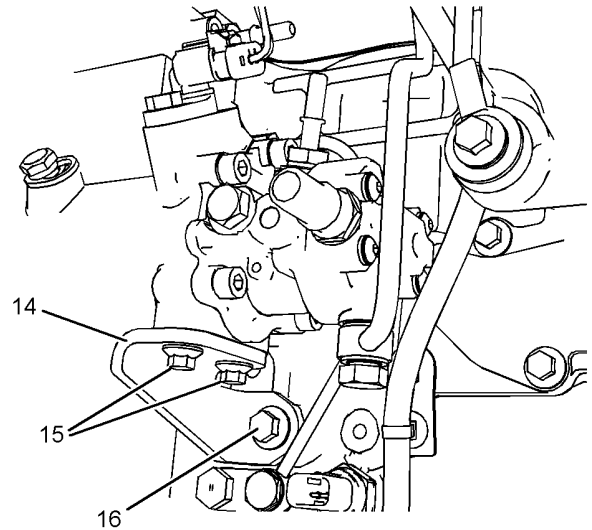


Illustration 28

g01566973

Typical example

18. Remove bolts (15) and remove bolt (16). Remove support bracket (14).

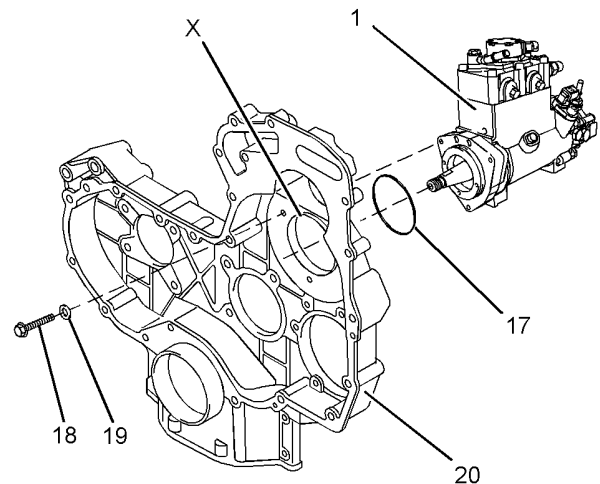


Illustration 29

g01801934

Typical example

19. Remove bolts (18) and remove sealing washers (19).

Note: The fuel injection pump should be supported by hand as the bolts are removed.

20. Carefully remove fuel injection pump (1) from front housing (20). Ensure that bore (X) in the front housing is not damaged as the fuel injection pump is removed.

21. Remove O-ring seal (17) from fuel injection pump (1).

i03401825

Fuel Injection Pump - Install

Installation Procedure

Table 6

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1
E	27610352	Fuel Injection Pump Timing Tool	1
F	21820221	POWERPART Rubber Grease	-

(1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

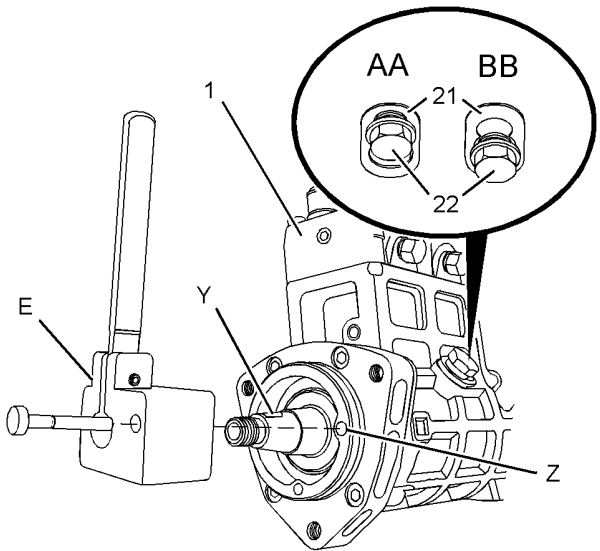


Illustration 30
Typical example
g01572496

Note: A new fuel injection pump is supplied, locked in the correct position. Do not unlock the fuel injection pump before installation.

1. If the fuel injection pump timing has been lost, it is possible to reset the fuel injection pump timing. Follow Step 1.a through Step 1.e in order to reset the fuel injection pump timing.

- Loosen locking screw (22) and slide spacer (21) to Position (AA). Tighten locking screw (22) to a torque of 9 N·m (80 lb in). This will prevent the locking screw from tightening against the shaft of the fuel injection pump.

The fuel injection pump is now unlocked.

- Position Tooling (E) onto the shaft of fuel injection pump (1). Align the lever of Tooling (E) with Keyway (Y) and engage the lever into the keyway.

Note: The lever of Tooling (E) should be a close fit in the keyway. If the lever is a loose fit in the keyway, it is not possible to reset the fuel injection pump timing.

- Rotate the shaft of the fuel injection pump and engage the pin of Tooling (E) into Hole (Z).

The fuel injection pump timing is now set in the correct position.

- Loosen locking screw (22) and slide spacer (21) to Position (BB). Tighten locking screw (22) to a torque of 9 N·m (80 lb in). The locking screw is now tightened against the shaft of the fuel injection pump.

The fuel injection pump is now locked.

e. Remove Tooling (E).

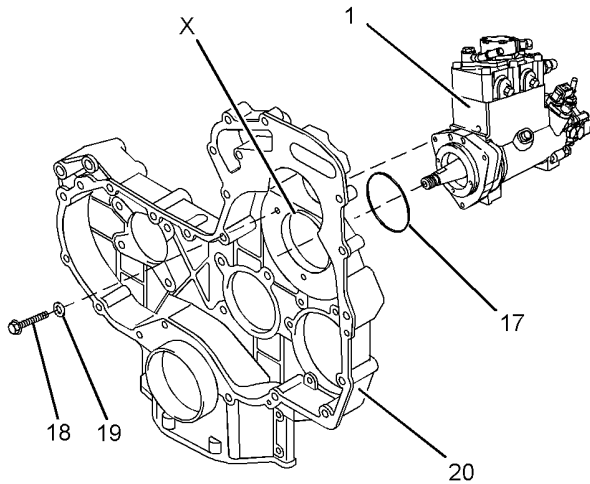


Illustration 31
Typical example

2. Inspect Bore (X) in front housing (20) for damage. If the bore is damaged, replace the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Remove" and Disassembly and Assembly, "Housing (Front) - Install".
3. Use Tooling (F) to lubricate a new O-ring seal (17). Install the O-ring seal onto fuel injection pump (1).
4. Align fuel injection pump (1) with front housing (20). Carefully install the fuel injection pump to the front housing.

Note: The fuel injection pump should be supported by hand until the bolts are installed.

5. Install bolts (18) and new sealing washers (19). Tighten the bolts to a torque of 25 N·m (18 lb ft).
6. If necessary, use Tooling (A) in order to rotate the crankshaft so that number one piston is at top dead center on the compression stroke. Refer to System Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".
7. Use Tooling (B) in order to lock the camshaft in the correct position. Use Tooling (C) in order to lock the crankshaft in the correct position. Refer to Disassembly and Assembly, "Gear Group (Front) - Remove and Install" for the correct procedure.
8. Install the fuel injection pump gear to the fuel injection pump. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Install" and refer to Disassembly and Assembly, "Gear Group (Front) - Install".

Note: Ensure that the fuel injection pump is unlocked after the installation of fuel injection pump gear is completed.

9. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

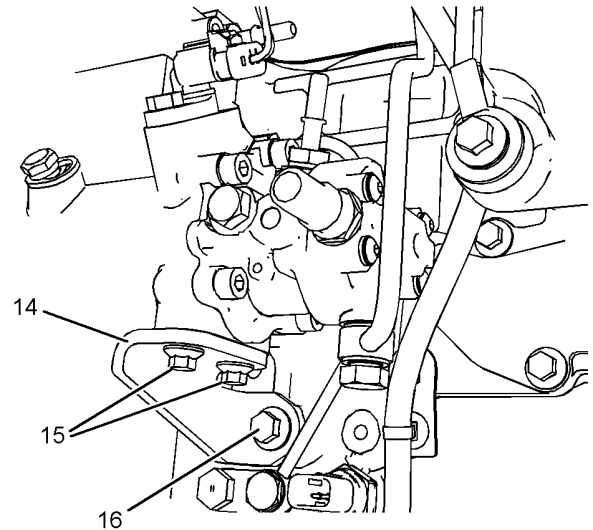


Illustration 32
Typical example

10. Position support bracket (14) and install bolts (15) finger tight. Install bolt (16) finger tight.
11. Tighten bolt (16) to a torque of 44 N·m (32 lb ft). Tighten bolts (15) to a torque of 22 N·m (16 lb ft).

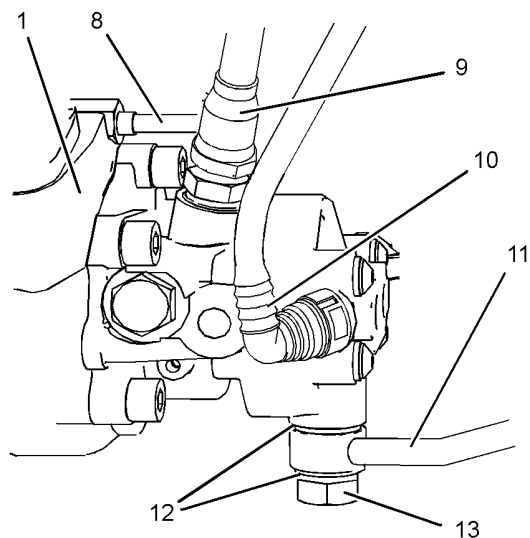


Illustration 33
Typical example

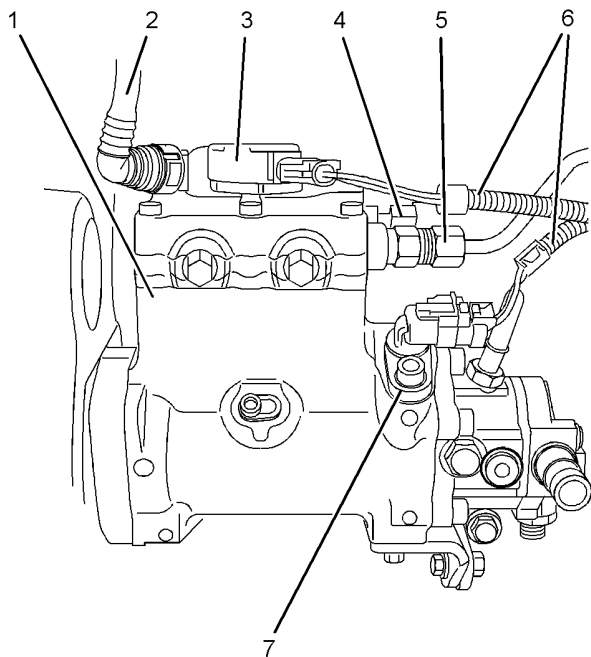


Illustration 34
Typical example

12. Install the banjo bolt and new sealing washers to tube assembly (8). Install tube assembly (8) for the oil feed to the fuel injection pump. Tighten the banjo bolt and the nut to a torque of 15 N·m (11 lb ft).
13. Install a new fuel injection line (5). Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".
14. Install new sealing washers (12) and banjo bolt (13) to tube assembly (11). Tighten the banjo bolt to a torque of 21 N·m (15 lb ft).
15. Connect plastic tube assembly (4) to fuel injection pump (1).
16. Connect plastic tube assembly (9) to fuel injection pump (1).
17. Connect plastic tube assembly (10) to fuel injection pump (1).
18. Connect harness assembly (6) to solenoid (3). Connect harness assembly (6) to position sensor (7). Slide the locking tab into the locked position.
19. Connect plastic tube assembly (2) to fuel injection pump (1).

20. If necessary, install the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".
21. If necessary, install the fuel priming pump. Refer to Disassembly and Assembly, "Fuel Priming Pump - Remove and Install".
22. If necessary, install the fuel filter base. Refer to Disassembly and Assembly, "Fuel Filter Base - Remove and Install".
23. Turn the battery disconnect switch to the ON position.
24. Turn the fuel supply to the ON position.
25. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime" for more information.

i02933643

Fuel Injection Pump Gear - Remove

Removal Procedure

Table 7

Required Tools			
Tool	Part Number	Part Descriptions	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1
D	-	Puller (Three Leg)	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Care must be taken in order to ensure that the fuel injection pump timing is not lost during the removal of the fuel pump gear. Carefully follow the procedure in order to remove the fuel pump gear.

1. Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".

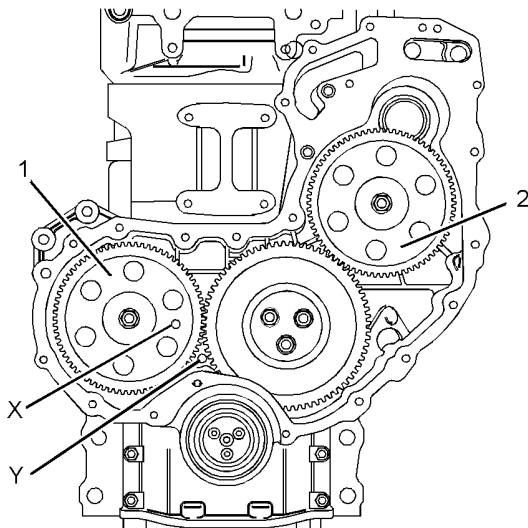


Illustration 35
Typical example

2. Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing. Use Tooling (B) in order to lock the camshaft in the correct position.
3. Install Tooling (C) into Hole (Y) in the front housing. Use Tooling (C) in order to lock the crankshaft in the correct position.

Note: Do not use excessive force to install Tooling (C). Do not use Tooling (C) to hold the crankshaft during repairs.

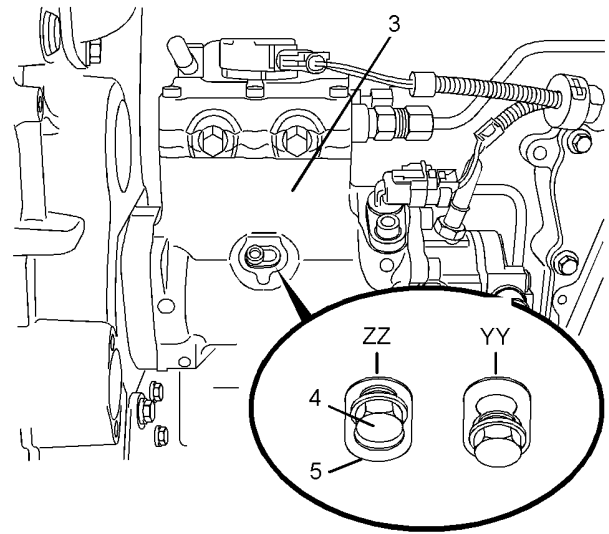


Illustration 36
Typical example

4. Apply sufficient pressure to fuel injection pump gear (2) in a counterclockwise direction in order to remove the backlash. Lock fuel injection pump (3) in this position.

In order to lock fuel injection pump (3), loosen locking screw (4) in the fuel injection pump. Slide spacer (5) into Position (YY). Tighten locking screw (4) against the shaft of the fuel injection pump to a torque of 9 N·m (80 lb in).

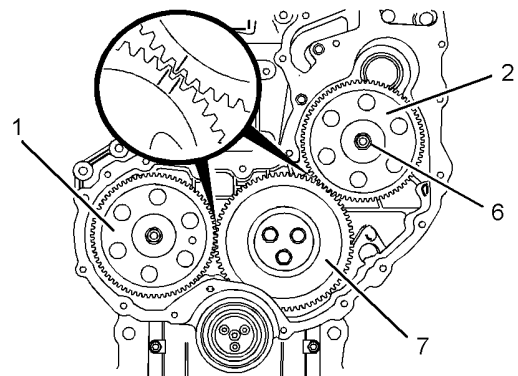


Illustration 37
Alignment of timing marks

5. Mark gear (1), gear (2) and gear (7) in order to show alignment. Refer to Illustration 37.

Note: Identification will ensure that the gears can be installed in the original alignment.

6. Loosen nut (6) on fuel pump gear (2).

- 7. Install Tooling (D) through three holes in fuel pump gear (2). Tighten Tooling (D) until the fuel pump gear is released.
- 8. Remove Tooling (D) from fuel pump gear (2).
- 9. Remove nut (6) and the washer from fuel pump gear (2). Remove the fuel pump gear.

i02933642

Fuel Injection Pump Gear - Install

Installation Procedure

Table 8

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1
E	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The fuel injection pump must remain locked until the procedure instructs you to unlock the fuel injection pump.

- 1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

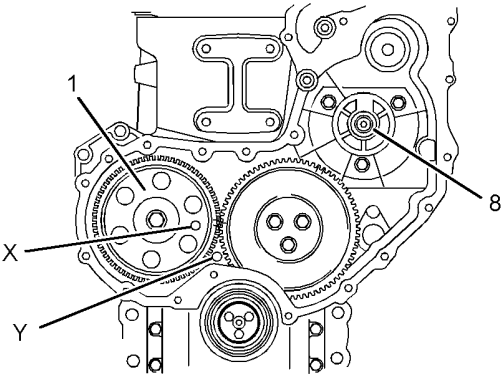


Illustration 38

g01765193

Typical example

- 2. Ensure that Tooling (C) is installed in Hole (Y) in the front housing. Use Tooling (C) in order to lock the crankshaft in the correct position.
- 3. Ensure that Tooling (B) is installed into Hole (X) in camshaft gear (1).
- 4. Ensure that shaft (8) on the fuel injection pump is clean, dry and free from damage.
- 5. Ensure that the fuel injection pump is locked in the correct position. Refer to Disassembly and Assembly, "Fuel Injection Pump - Install".
- 6. Ensure that the fuel pump gear is clean, dry and free from wear or damage. If necessary, replace the fuel pump gear.

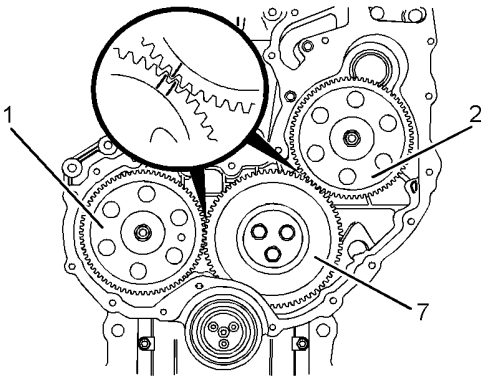


Illustration 39

g01769115

Alignment of timing marks

- 7. Install fuel pump gear (2) to shaft (8) of the fuel injection pump. Ensure that the timing marks on gears (2) and (7) are in alignment and that the mesh of the gears is correct.

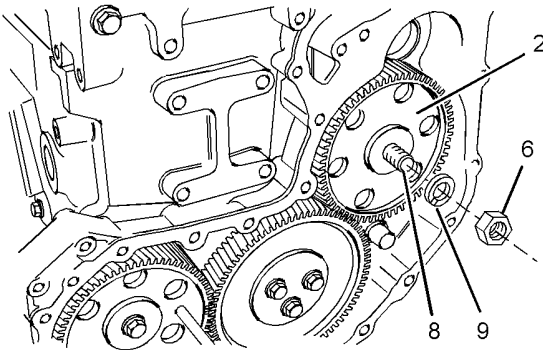


Illustration 40

g01769133

Typical example

i02933618

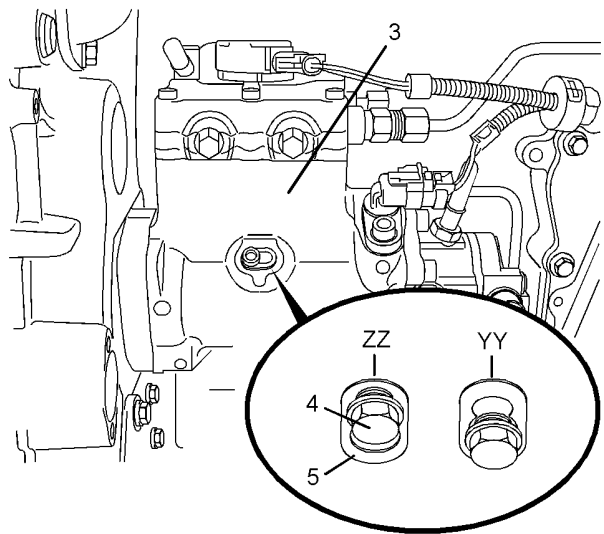


Illustration 41

g01459724

Typical example

8. Install a new spring washer (9) and install nut (6) to shaft (8) of the fuel injection pump. Apply sufficient pressure to fuel injection pump gear (2) in a counterclockwise direction in order to remove the backlash. Tighten nut (6) to a torque of 25 N·m (18 lb ft). Unlock fuel injection pump (3).

In order to unlock the fuel injection pump, loosen locking screw (4) on the fuel injection pump. Slide spacer (5) into Position (ZZ). Tighten the locking screw against the spacer to a torque of 9 N·m (80 lb in). This will prevent the locking screw from tightening against the shaft of the fuel injection pump.

9. Remove Tooling (B) and Tooling (C).
10. Tighten nut (6) to a torque of 90 N·m (66.4 lb ft).
11. Use Tooling (E) to measure the backlash of gears (2) and (7). Ensure that the backlash for the gears is within specified values. Refer to Specifications, "Gear Group (Front)" for further information.
12. Lubricate the teeth of the gears with clean engine oil.

End By:

- a. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

Electronic Unit Injector - Remove

Removal Procedure

Table 9

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610307	T40 Torx Socket	1
C	27610288	Pry Bar	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

⚠ WARNING

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. Turn the fuel supply to the OFF position.
2. Turn the battery disconnect switch to the OFF position.

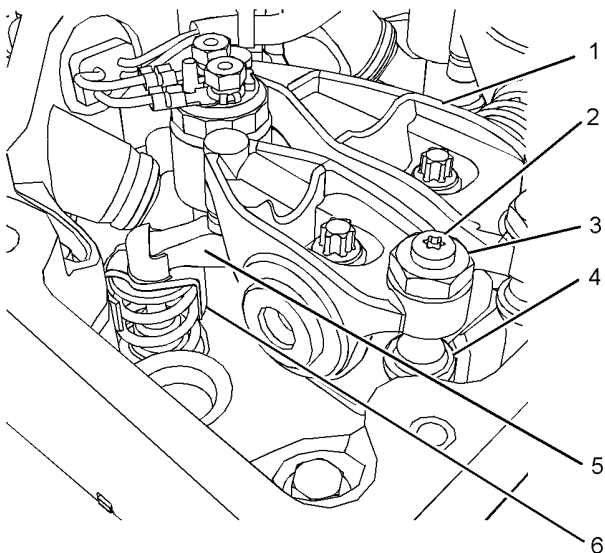


Illustration 42

g01772534

Typical example

3. Use Tooling (A) in order to rotate the crankshaft until rocker arms (1) for the appropriate cylinder are in the correct position in order to adjust the valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

4. Follow Step 4.a through Step 4.d in order to gain access to the electronic unit injector.

- a. Make a temporary mark on valve bridges (5) in order to show the location and orientation.

Note: Identification will ensure that the valve bridges can be reinstalled in the original location and the original orientation.

- b. Loosen nuts (3) for the appropriate cylinder. Unscrew adjusters (2) for the appropriate cylinder until pushrods (4) can be withdrawn from the balls of the adjusters.
 - c. Withdraw the cups of pushrods (4) from the balls of adjusters (2).
 - d. Remove valve bridges (5) from the cylinder head. If the valve bridges are equipped with shrouds (6), ensure that the shrouds are removed from the cylinder head.

Note: Do not interchange the location or the orientation of used valve bridges.

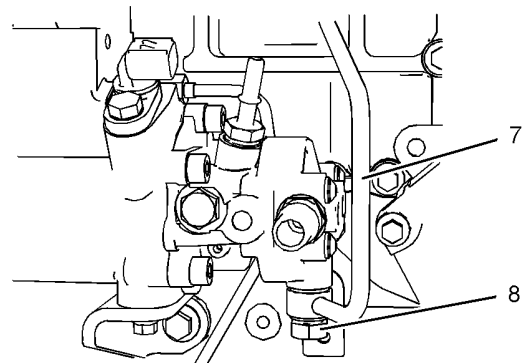


Illustration 43

g01769493

Typical example

5. Loosen banjo bolt (8) on the fuel transfer pump sufficiently in order to allow the fuel to drain from tube assembly (7).

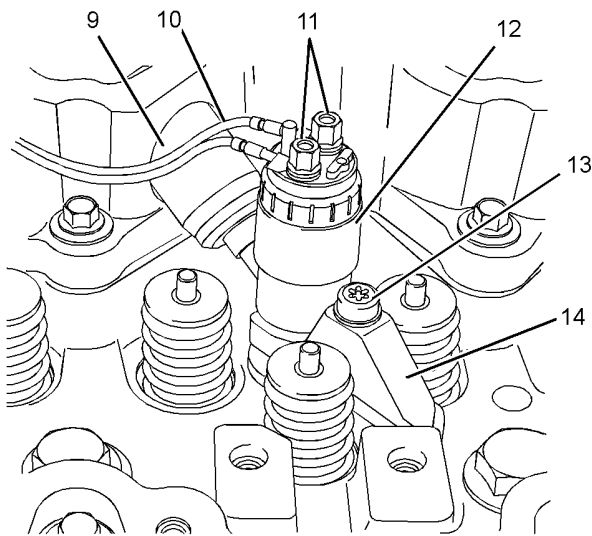


Illustration 44 g01769513

The rocker shaft is not shown for clarity.

6. Remove the fuel injection line and remove seal (9) from the appropriate electronic unit injector (12). Refer to Disassembly and Assembly, "Fuel Injection Lines - Remove".

Note: Cap all open ports immediately with new caps.

7. Use a deep socket to remove connections (11) from electronic unit injector (12).
8. Slide rocker arms (1) to one side in order to gain access to torx screw (13). Use Tooling (B) in order to remove the torx screw from clamp (14). Discard the torx screw.

Note: Tooling (B) must be used to ensure no damage to the rocker arms.

9. Place a temporary identification mark on the original electronic unit injector. The electronic unit injector must be reinstalled in the original location in the cylinder head.

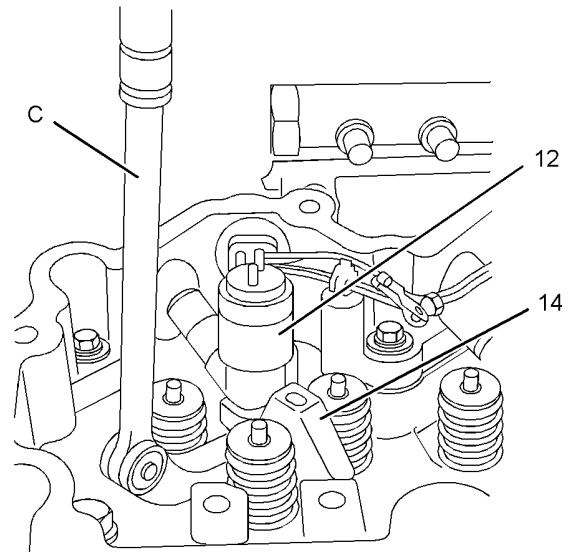


Illustration 45 g01769553

The rocker shaft is not shown for clarity.

10. Use Tooling (C) to pry beneath clamp (14) and free electronic unit injector (12) from the cylinder head.

11. Remove electronic unit injector (12) and clamp (14) from the cylinder head.

Note: Always handle electronic unit injectors with care.

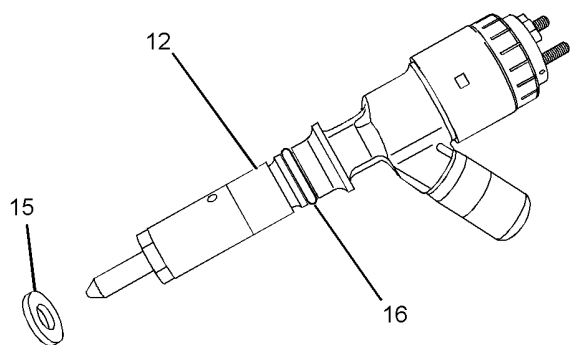


Illustration 46 g01769574

Typical example

12. Remove sealing washer (15). Ensure that the sealing washer is removed from the cylinder head. Remove O-ring seal (16) from the electronic unit injector.

Alternative Removal Procedure

Table 10

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610307	T40 Torx Socket	1
C	27610288	Pry Bar	1

Start By:

- a. Remove the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Remove".
- b. Remove the fuel injection lines. Refer to Disassembly and Assembly, "Fuel Injection Lines - Remove".

Note: This is an optional procedure to remove the electronic unit injectors. The method should ONLY be used when all electronic unit injectors are removed and when the engine is removed from the application.

**WARNING**

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

- 1. Turn the fuel supply to the OFF position.
- 2. Turn the battery disconnect switch to the OFF position.

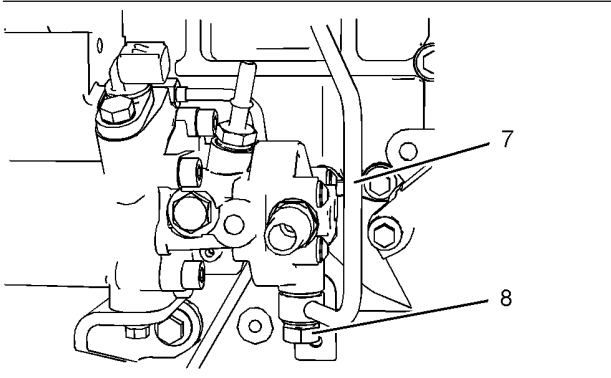


Illustration 47
Typical example
g01769493

- 3. Loosen banjo bolt (8) on the fuel transfer pump sufficiently in order to allow the fuel to drain from tube assembly (7).

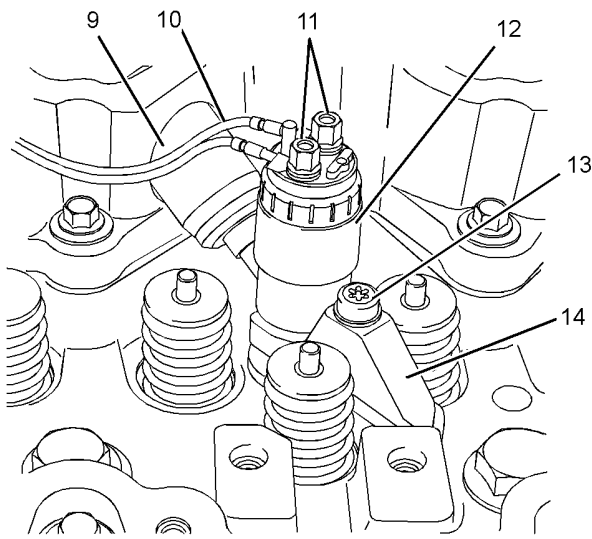


Illustration 48
Typical example

4. Place a temporary identification mark on connections (11) for harness assembly (10).
5. Use a deep socket to remove connections (11) from electronic unit injector (12).
6. Use Tooling (B) in order to remove torx screw (13) from clamp (14). Discard the torx screw.
7. Place a temporary identification mark on the original electronic unit injector. The electronic unit injector must be reinstalled in the original location in the cylinder head.

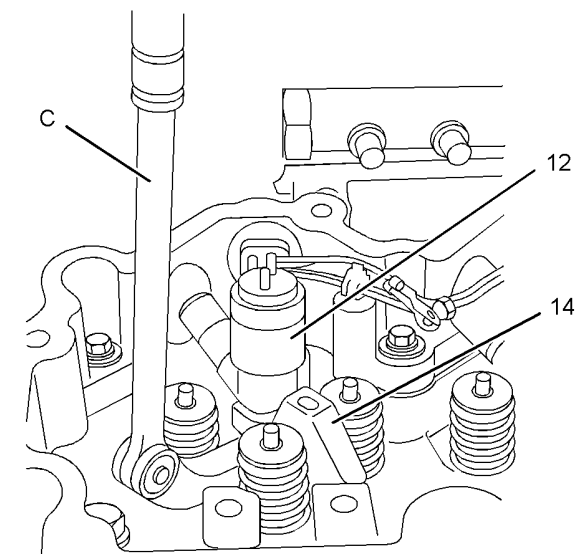


Illustration 49
Typical example

8. Use Tooling (C) to pry beneath clamp (14) and free electronic unit injector (12) from the cylinder head.
9. Remove electronic unit injector (12) and clamp (14) from the cylinder head.

Note: Always handle electronic unit injectors with care.

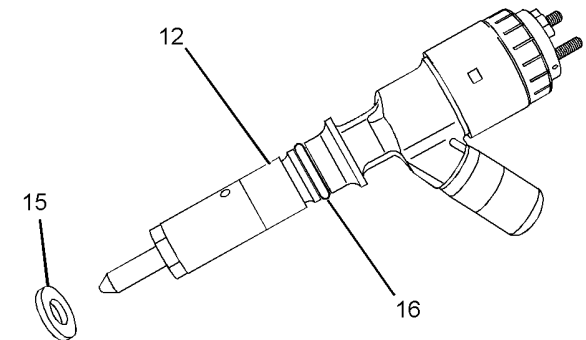


Illustration 50
Typical example

10. Remove sealing washer (15). Ensure that the sealing washer is removed from the cylinder head. Remove O-ring seal (16) from the electronic unit injector.
11. Repeat Step 4 through Step 11 in order to remove the remaining electronic unit injectors.

i02933617

Electronic Unit Injector - Install

Installation Procedure

Table 11

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610307	T40 Torx Socket	1
D	GE50028	Vacuum Pump	1
	GE50030	Tube 7.9 mm (0.31 inch) Outside Diameter	1
E	27610294	Injector Pipe Nut Tool	1
F	27610296	Torque Wrench	1

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Use a deep socket in order to install the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

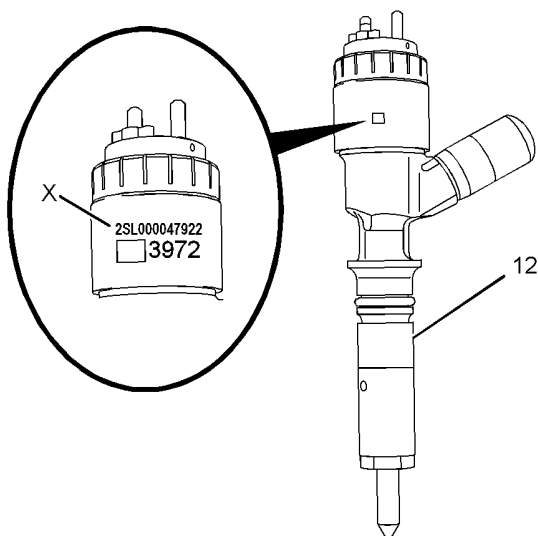


Illustration 51

g01772353

Typical calibration code

1. If a replacement electronic unit injector is installed, the correct trim file for the injector must be programmed into the electronic control module. Refer to Troubleshooting, "Injector Trim File" for more information. The code that is required to obtain the trim file for the injector is located at Position (X).

Note: Record Code (X) before the electronic unit injector is installed.

2. Use Tooling (D) in order to remove any fuel from the cylinder.

Note: Evacuate as much fuel as possible from the cylinder before installing the electronic unit injector.

3. Ensure that the fuel inlet port of the electronic unit injector is capped. Ensure that the electronic unit injector is clean.

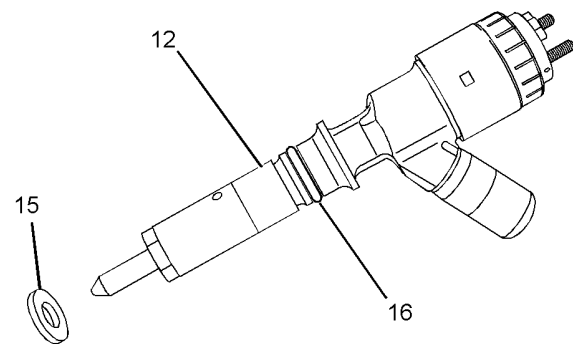


Illustration 52

g01769574

Typical example

4. On installing an original electronic unit injector, install a new O-ring seal (16) and sealing washer (15) to electronic unit injector (12).

Ensure that O-ring seal (16) and sealing washer (15) on a new electronic unit injector are not damaged and in place.

Note: Do not lubricate the O-ring seal.

5. Ensure that the seat for the electronic unit injector in the cylinder head is clean and free from damage. Ensure that the old sealing washer has been removed from the cylinder head.

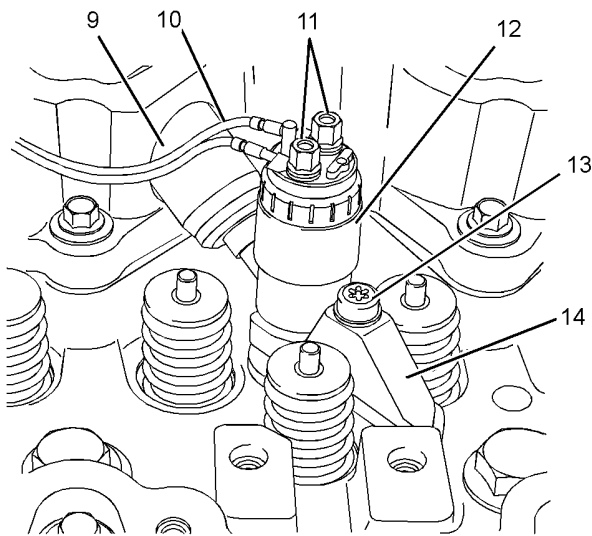


Illustration 53 g01769513

The rocker shaft is not shown for clarity.

6. Position clamp (14) between the rocker arm and the valve springs. Align electronic unit injector (12) to the bore for the electronic unit injector in the cylinder head. Install the clamp to the electronic unit injector. Ensure that the electronic unit injector is pushed firmly against the seat in the cylinder head.

7. Install a new torx screw (13) to clamp (14). Tighten the torx screw finger tight.

8. Remove the cap from electronic unit injector (12). Install a new seal (9) to electronic unit injector (12) and to the valve mechanism cover base. Ensure that the flange on the seal is flush with the valve mechanism cover base.

9. Remove the plugs from the new fuel injection line. Loosely install the fuel injection line. Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".

Note: Ensure that the ends of the fuel injection line are seated in the electronic unit injector and the fuel manifold. Tighten the nuts finger tight.

10. Use Tooling (B) to tighten torx screw (12) to a torque of 27 N·m (20 lb ft).

Note: Tooling (B) must be used to ensure no damage to the rocker arms.

11. Use Tooling (E) to tighten the fuel injection line to a torque of 30 N·m (22 lb ft). Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".

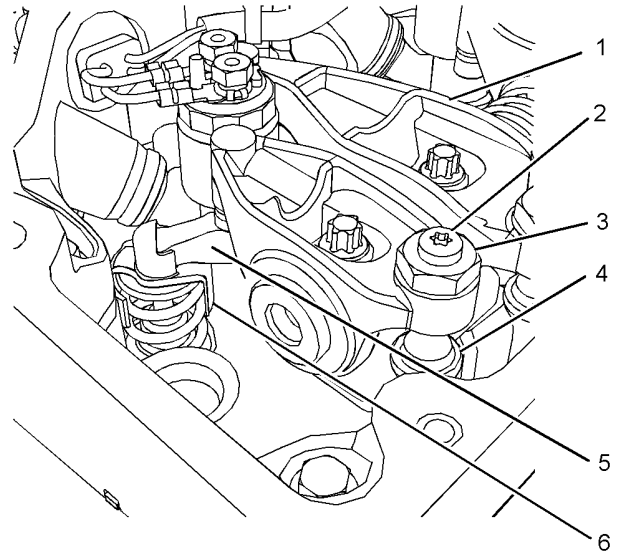


Illustration 54 g01772534

Typical example

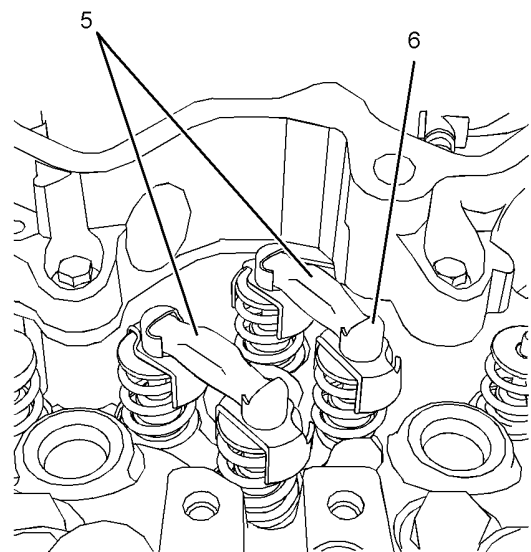


Illustration 55 g01774093

Typical example

The electronic unit injector is not shown for clarity.

NOTICE

Failure to ensure that ALL valve bridges are correctly seated onto the valve stems will cause interference between the pistons and the valves, resulting in damage to the engine.

12. Install valve bridges (5) to the cylinder head. If valve bridges (5) are equipped with shrouds (6), ensure that the shrouds are located correctly.

Note: Ensure that used valve bridges are reinstalled in the original location and the original orientation. Do not interchange the location or the orientation of used valve bridges.

13. Ensure that the bottoms of the pushrods are seated in the cups of the valve lifters. Locate the balls of adjusters (2) into the cups of pushrods (4). Adjust the valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".
14. Use a deep socket to install harness assembly (10) to electronic unit injector (12). Use Tooling (F) to tighten connections (11) to a torque of 2.4 N·m (21 lb in).

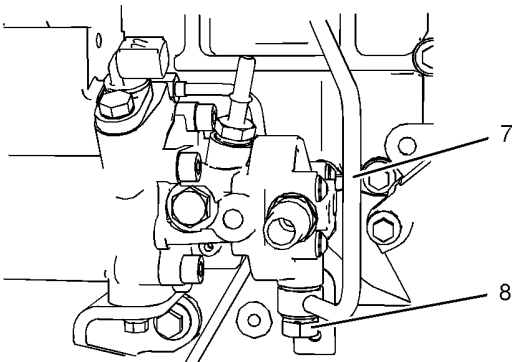


Illustration 56
Typical example

15. Tighten banjo bolt (8) on the fuel transfer pump for tube assembly (7). Tighten the banjo bolt to a torque of 21 N·m (15 lb ft).
16. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".
17. Turn the fuel supply to the ON position.
18. Turn the battery disconnect switch to the ON position.
19. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime" for more information.

Alternative Installation Procedure

Table 12

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610307	T40 Torx Socket	1
D	GE50028	Vacuum Pump	1
	GE50030	Tube 7.9 mm (0.31 inch) Outside Diameter	1
E	27610294	Injector Pipe Nut Tool	1
F	27610296	Torque Wrench	1

Note: This is an optional procedure to install the electronic unit injectors. The method should ONLY be used when all electronic unit injectors are installed and when the engine is removed from the application.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

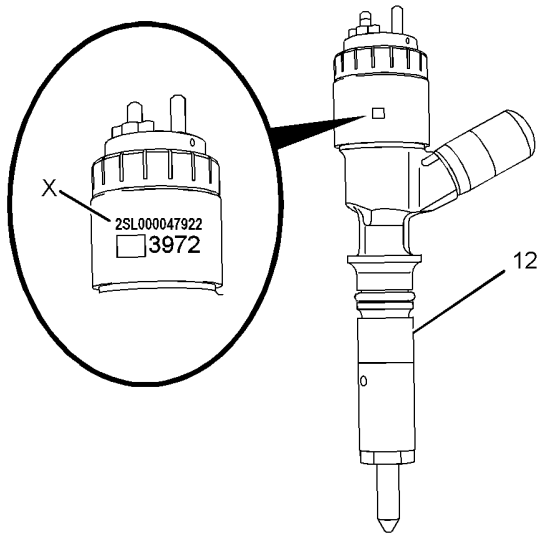


Illustration 57
Typical calibration code

1. If a replacement electronic unit injector is installed, the correct trim file for the injector must be programmed into the electronic control module. Refer to Troubleshooting, "Injector Trim File" for more information. The code that is required to obtain the trim file for the injector is located at Position (X).

Note: Record Code (X) before the electronic unit injector is installed.

2. Use Tooling (D) to remove any fuel from the cylinder.

Note: Evacuate as much fuel as possible from the cylinder before installing the electronic unit injector.

3. Ensure that the fuel inlet port of the electronic unit injector is capped. Ensure that the electronic unit injector is clean.

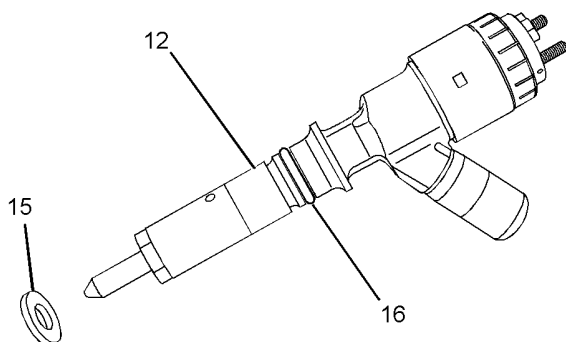


Illustration 58
Typical example

4. On installing an original electronic unit injector, install a new O-ring seal (16) and sealing washer (15) to electronic unit injector (12).

Ensure that O-ring seal (16) and sealing washer (15) on a new electronic unit injector are not damaged and in place.

Note: Do not lubricate the O-ring seal.

5. Ensure that the seat for the electronic unit injector in the cylinder head is clean and free from damage. Ensure that the old sealing washer has been removed from the cylinder head.

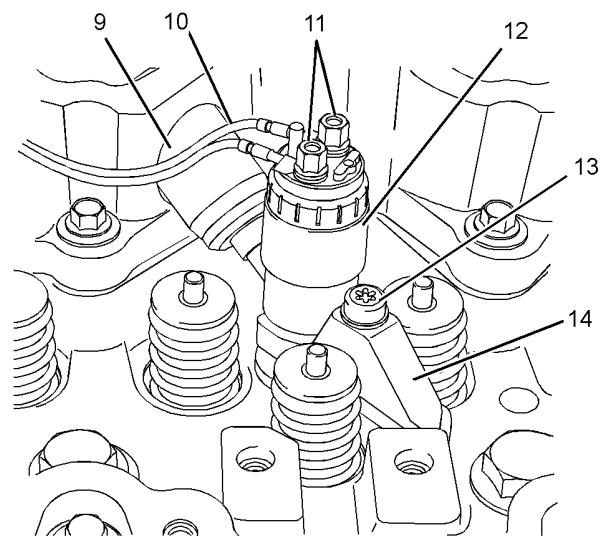


Illustration 59
Typical example

6. Install clamp (14) to electronic unit injector (12). Install the electronic unit injector assembly into the original location in the cylinder head.

Note: Ensure that the electronic unit injector is pushed firmly against the seat in the cylinder head. Install the electronic unit injector for number one cylinder first. Install the electronic unit injectors in numerical order.

7. Install a new torx screw (13) to clamp (14). Tighten the torx screw finger tight.

8. Remove the cap from electronic unit injector (12). Install a new seal (9) to electronic unit injector (12) and to the valve mechanism cover base. Ensure that the flange on the seal is flush with the valve mechanism cover base.

9. Remove the plugs from the new fuel injection line. Loosely install the fuel injection line. Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".

Note: Ensure that the ends of the fuel injection line are seated in the electronic unit injector and the fuel manifold. Tighten the nuts finger tight.

10. Use Tooling (B) to tighten torx screw (12) to a torque of 27 N·m (20 lb ft).
11. Use Tooling (E) to tighten the fuel injection line to a torque of 30 N·m (22 lb ft). Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".
12. Repeat Step 2 through Step 11 in order to install the remaining electronic unit injectors.
13. Use a deep socket to install harness assemblies (10) to electronic unit injectors (12). Use Tooling (F) to tighten connections (11) to a torque of 2.4 N·m (21 lb in).

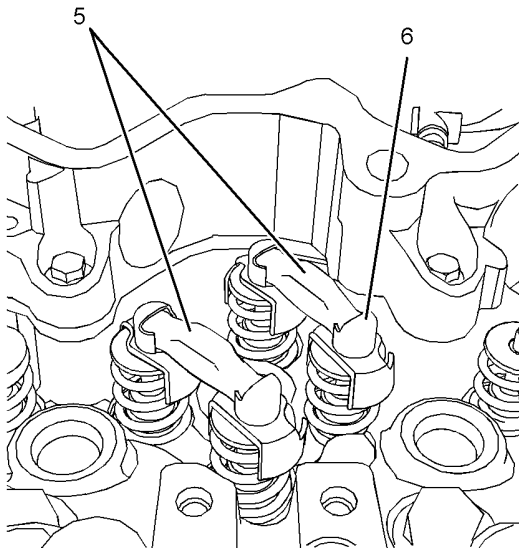


Illustration 60

g01774093

Typical example

The electronic unit injector is not shown for clarity.

NOTICE

Failure to ensure that ALL valve bridges are correctly seated onto the valve stems will cause interference between the pistons and the valves, resulting in damage to the engine.

14. Install valve bridges (5) to the cylinder head. If valve bridges (5) are equipped with shrouds (6), ensure that the shrouds are located correctly.
15. Install the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrods - Install".

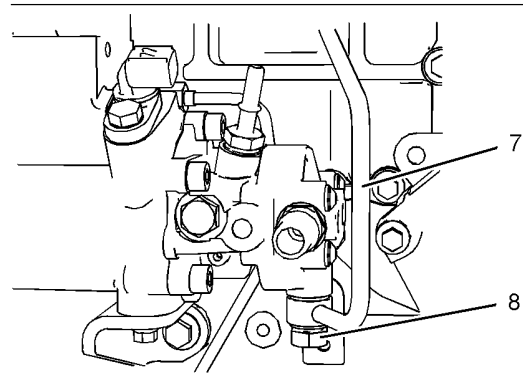


Illustration 61

g01769493

Typical example

16. Tighten banjo bolt (8) on the fuel transfer pump for tube assembly (7). Tighten the banjo bolt to a torque of 21 N·m (15 lb ft).
17. Turn the fuel supply to the ON position.
18. Turn the battery disconnect switch to the ON position.
19. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime" for more information.

i03428965

Turbocharger - Remove (Top Mounted Turbocharger)

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Plug and cap all open ports and tube assemblies.

1. Disconnect the air hose for the turbocharger inlet and for the turbocharger outlet.
2. If the turbocharger has a remote wastegate solenoid, disconnect the hose from the actuator on the turbocharger. Disconnect the hose assembly for the wastegate solenoid from the tube assembly for the oil feed on the turbocharger. The hose assembly is secured with clips.
3. Disconnect the exhaust pipe.
4. If the turbocharger has an exhaust elbow, remove the exhaust elbow. Refer to Disassembly and Assembly, "Exhaust Elbow - Remove and Install".

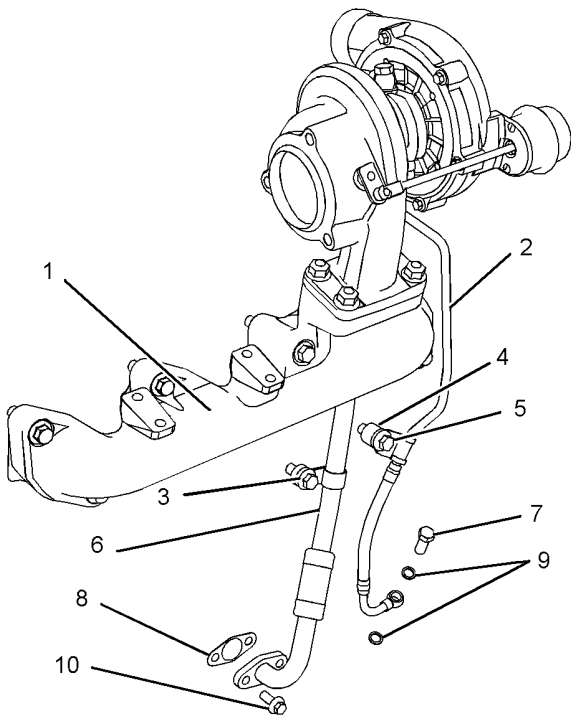


Illustration 62

g01780893

5. Remove bolts (10) in order to disconnect tube assembly (6) from the cylinder block. Remove gasket (8).
6. Remove bolt (7) in order to disconnect tube assembly (2) from the cylinder block. Remove sealing washers (9).
7. Remove bolt (3) for the tube clip.
8. Remove bolt (5) and spacer (4) for the tube clip.

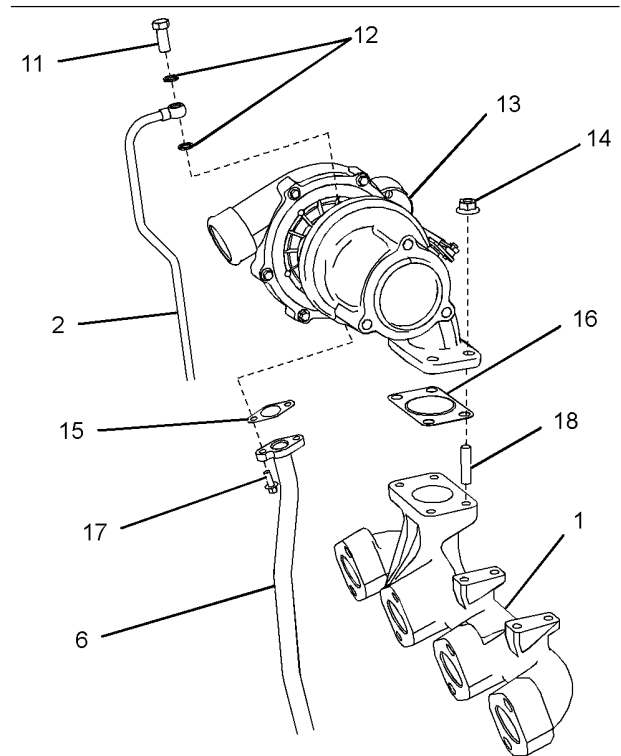


Illustration 63

g01782773

9. Loosen nuts (14).
 10. Remove banjo bolt (11) and remove tube assembly (2) for the oil feed from turbocharger (13). Remove sealing washers (12).
 11. Remove exhaust manifold (1) and the assembly of the turbocharger from the cylinder head. Refer to Disassembly and Assembly, "Exhaust Manifold - Remove and Install" for the correct procedure.
 12. Remove bolts (17) and remove tube assembly (6) for the oil drain from turbocharger (11).
 13. Remove gasket (15).
 14. Remove nuts (14) and remove turbocharger (13) from exhaust manifold (1).
- Note:** Ensure that the exhaust manifold and the turbocharger are adequately supported during the removal of the turbocharger.
15. Remove gasket (16) from exhaust manifold (1).
 16. If necessary, remove studs (18) from exhaust manifold (1).

i02933674

Turbocharger - Remove (Side Mounted Turbochargers)

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Plug and cap all open ports and tube assemblies.

1. Disconnect the air hose for the turbocharger inlet and for the turbocharger outlet (not shown).
2. If the turbocharger is equipped with an exhaust elbow, remove the exhaust elbow. Refer to Disassembly and Assembly, "Exhaust Elbow - Remove and Install".

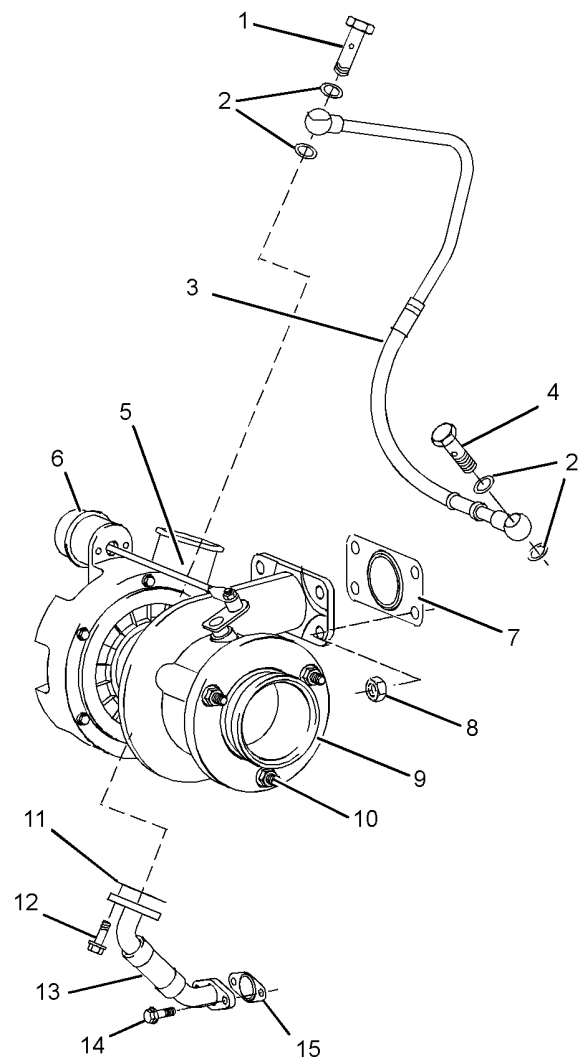


Illustration 64

g01264131

Typical example

3. If the turbocharger is equipped with an adapter (9), Remove nuts (10) and remove adapter (9) from turbocharger (5).
4. Remove banjo bolt (1) and disconnect tube assembly (3) from turbocharger (5). Remove sealing washers (2) from tube assembly (3).

If necessary, remove tube assembly (3) from the tube assembly for actuator (6). Tube assembly (3) is secured to the tube assembly for the actuator by clips.
5. Disconnect the hose from actuator (6).
6. Remove banjo bolt (4) and remove tube assembly (3) from the cylinder block. Remove sealing washers (2) from tube assembly (3).

7. Remove bolts (12). Disconnect tube assembly (13) from turbocharger (5). Remove gasket (11).

If necessary, remove bolts (14) and remove tube assembly (13) from the cylinder block. Remove gasket (15).

8. Remove nuts (8) and remove turbocharger (5).

Note: Do not use the actuator rod to lift the turbocharger.

9. Remove gasket (7).

10. If necessary, remove the studs from the exhaust manifold.

i03431780

Turbocharger - Install (Top Mounted Turbocharger)

Installation Procedure

Table 13

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

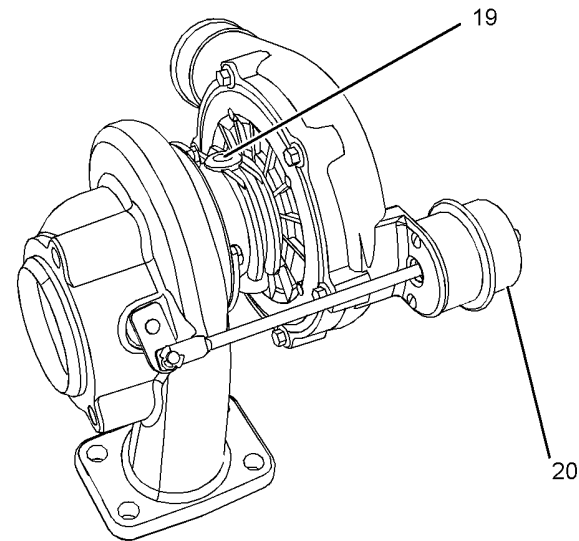


Illustration 65

g01784893

Typical example

1. Ensure that the turbocharger is clean and free from damage. Inspect the turbocharger for wear. Refer to System Operation, Testing and Adjusting, "Turbocharger Inspect" for more information. If the turbocharger is worn, the complete turbocharger must be replaced.
2. Test wastegate actuator (20) for correct operation. Refer to System Operation, Testing and Adjusting, "Turbocharger Inspect". If the wastegate actuator is damaged or the wastegate actuator does not operate within the specified limits, the complete turbocharger must be replaced.

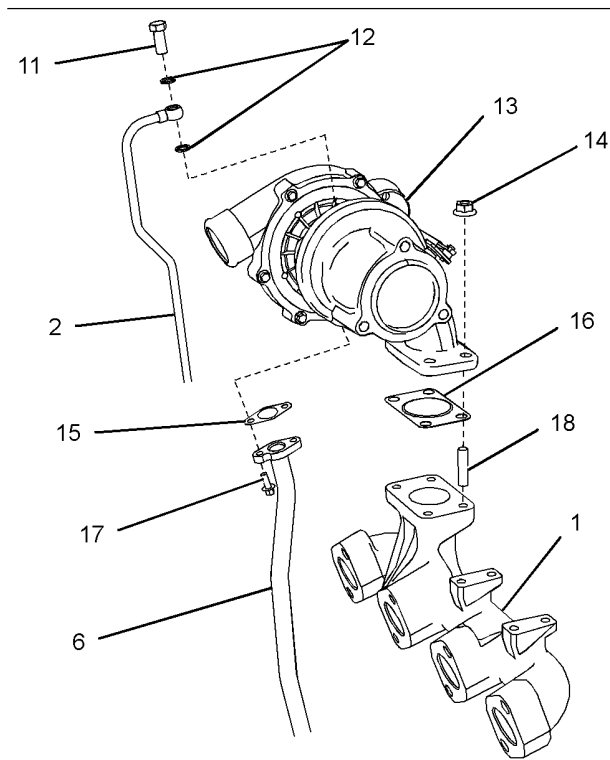


Illustration 66

g01782773

3. Clean the gasket surfaces of the exhaust manifold (1). If necessary, install studs (18) to the exhaust manifold. Tighten the studs to a torque of 18 N·m (13 lb ft).

Note: Support the exhaust manifold during installation of the turbocharger.

4. Install a new gasket (16) to exhaust manifold (1).
5. Position turbocharger (13) on exhaust manifold (1).
6. Install nuts (14). Tighten the nuts to a torque of 44 N·m (32 lb ft).
7. Ensure that tube assembly (6) is clean and free from damage. Replace any damaged components.
8. Position a new gasket (15) and bolts (17) onto tube assembly (6).
9. Install tube assembly (6) to turbocharger (13). Tighten bolts (17) finger tight.
10. Install exhaust manifold (1) and the assembly of the turbocharger to the cylinder head. Refer to Disassembly and Assembly, "Exhaust Manifold - Remove and Install" for the correct procedure.

11. Remove the plug from oil inlet port (19). Refer to Illustration 65. Lubricate the turbocharger bearings with clean engine oil through the oil inlet port. Rotate the wheel of the compressor several times in order to lubricate the bearings.

12. Ensure that tube assembly (2) is clean and free from damage. Replace any damaged components.

13. Install banjo bolt (11) and new sealing washers (12) to tube assembly (2).

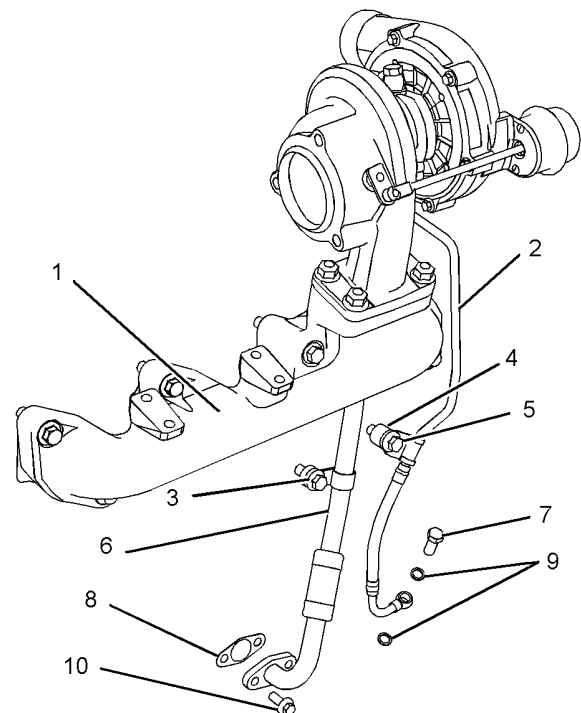


Illustration 67

g01780893

14. Install banjo bolt (7) and new sealing washers (9) to tube assembly (2).
15. Install tube assembly (2) to turbocharger (13). Tighten banjo bolt (11) finger tight. Refer to Illustration 66.
16. Tighten banjo bolt (7) to the cylinder block finger tight.
17. Position a new gasket (8) between the flange of tube assembly (6) and the cylinder block. Install bolts (10) finger tight.
18. Tighten banjo bolt (7) to a torque of 20 N·m (14 lb ft). Tighten bolts (10) to a torque of 22 N·m (16 lb ft).
19. Tighten banjo bolt (11) to a torque of 20 N·m (14 lb ft). Tighten bolts (17) to a torque of 9 N·m (80 lb in). Refer to Illustration 66.

20. Install bolt (3) for the tube clip to the cylinder block. Tighten bolt (3) to a torque of 44 N·m (32 lb ft).
 21. Install bolt (5) and spacer (4) for the tube clip to the cylinder block. Tighten bolt (5) to a torque of 44 N·m (32 lb ft).
 22. If the turbocharger has an exhaust elbow, install the exhaust elbow. Refer to Disassembly and Assembly, "Exhaust Elbow - Remove and Install".
 23. Connect the exhaust pipe.
 24. If the turbocharger has a remote wastegate solenoid, connect the hose to the actuator on the turbocharger. Connect the hose assembly for the wastegate solenoid to the tube assembly for the oil feed on the turbocharger. The hose assembly is secured with clips.
 25. Connect the air outlet hose to turbocharger (13).

If the engine has an air pipe, install the air pipe and install the gasket to the cylinder head. Apply Tooling (A) to the fasteners for the air pipe. Tighten the fasteners to a torque of 22 N·m (16 lb ft).

Tighten the hose clamps to a torque of 5 N·m (44 lb in).
- Note:** If the air outlet hose has a reflective heat shield, ensure that the reflective heat shield is installed toward the engine.
26. Connect the air inlet hose to turbocharger (13).

i02933673

Turbocharger - Install (Side Mounted Turbochargers)

Installation Procedure

Table 14

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

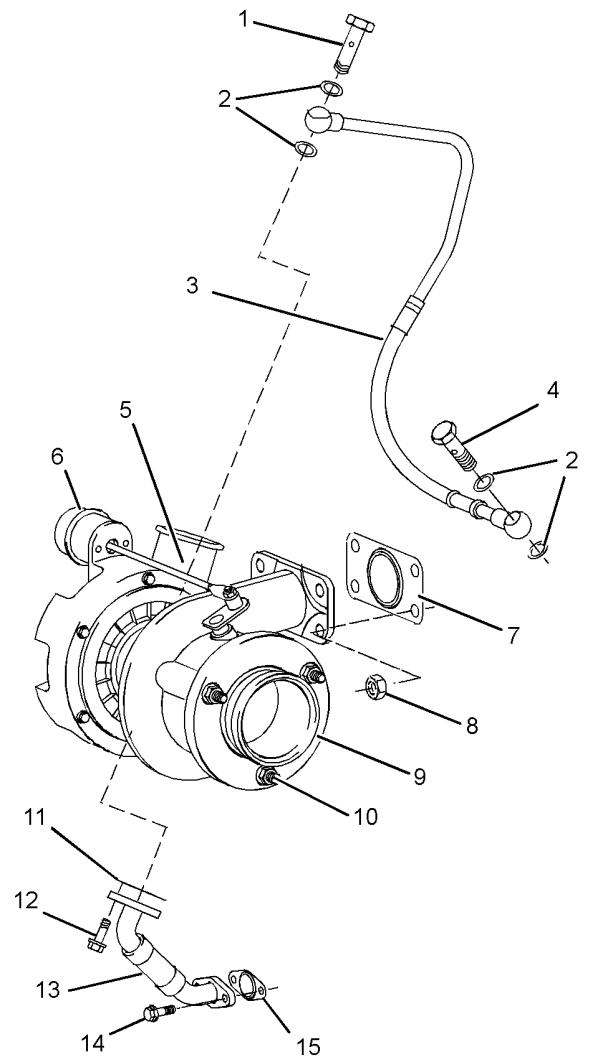
1. Ensure that the turbocharger is clean and free from damage. Inspect the turbocharger for wear. Refer to Systems Operation, Testing and Adjusting, "Turbocharger - Inspect" for more information. If the turbocharger is worn, the complete turbocharger must be replaced.
- 
2. Test actuator (6) for correct operation. Refer to Systems Operation, Testing and Adjusting, "Turbocharger - Inspect". If the actuator is damaged or the actuator does not operate within the specified limits, the complete turbocharger must be replaced.
 3. Clean the gasket surfaces of the exhaust manifold. If necessary, install the studs to the exhaust manifold. Tighten the studs to a torque of 18 N·m (13 lb ft).
 4. Install a new gasket (7) to the exhaust manifold.

Illustration 68

Typical example

g01264131

5. Position turbocharger (5) onto the exhaust manifold and install nuts (8). Tighten the nuts to a torque of 44 N·m (32 lb ft).

Note: Do not use the actuator rod to lift the turbocharger.

6. Position a new gasket (11) and tube assembly (13) onto turbocharger (5). Install bolts (12) finger tight.
7. Position a new gasket (15) onto the cylinder block. Install bolts (14) finger tight.
8. Tighten bolts (12) to a torque of 9 N·m (80 lb in). Tighten bolts (14) to a torque of 22 N·m (16 lb ft).
9. Lubricate the bearings of turbocharger (5) with clean engine oil through the oil inlet port. Rotate the shaft of the turbocharger in order to distribute the lubricant.
10. Position tube assembly (3) onto turbocharger (5). Install new washers (2) and banjo bolt (1) to tube assembly (3). Tighten the banjo bolt finger tight.
11. Install new washers (2) and banjo bolt (4) onto tube assembly (3). Connect the tube assembly to the cylinder block. Tighten the banjo bolt finger tight.
12. Tighten banjo bolts (1) and (4) to a torque of 18 N·m (13 lb ft).

Note: Ensure that the tube assembly does not come into contact with any other engine components.

13. Connect the hose to actuator (6). If necessary, secure tube assembly (3) to the tube assembly for actuator (6). Tube assembly (3) is secured to the tube assembly for the actuator by clips.
14. If the turbocharger has an exhaust elbow, install the exhaust elbow. Refer to Disassembly and Assembly, "Exhaust Elbow - Remove and Install".
15. If the turbocharger has an adapter (9), position the adapter onto the turbocharger. Tighten three nuts (10) progressively. Tighten the nuts to a torque of 25 N·m (18 lb ft).

Note: Ensure that the adapter is square with the face of the turbocharger.

16. Connect the air outlet hose to turbocharger (5).

If the engine has an air pipe, install the air pipe and install the gasket to the cylinder head. Apply Tooling (A) to the bolts for the air pipe. Tighten the bolts to a torque of 22 N·m (16 lb ft).

Tighten the hose clamps to a torque of 5 N·m (44 lb in).

Note: If the air outlet hose has a reflective heat shield, ensure that the reflective heat shield is installed toward the engine.

17. Connect the air inlet hose to turbocharger (5).

i02933679

Wastegate Solenoid - Remove and Install

Removal Procedure

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to keep contaminants from entering the system.

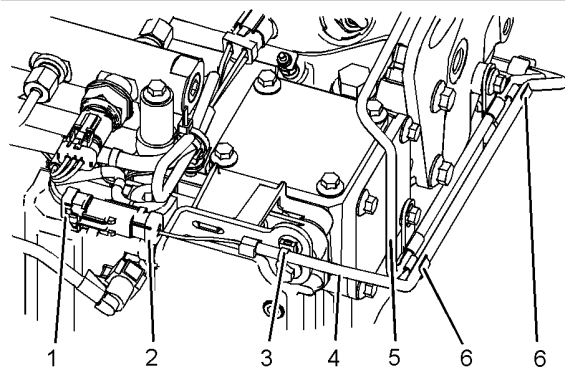


Illustration 69

g01247498

Typical example

1. Follow Step 1.a through Step 1.d in order to disconnect the harness assembly for the wastegate solenoid.
 - a. Slide locking tab (1) into the unlocked position.
 - b. Disconnect plug (2) from the engine wiring harness.
 - c. Cut cable straps (3).
- Note:** Identify the position of all cable straps for installation purposes.
- d. Remove harness assembly (4) from tube assembly (5). The harness assembly is secured to the tube assembly by plastic clips (6).

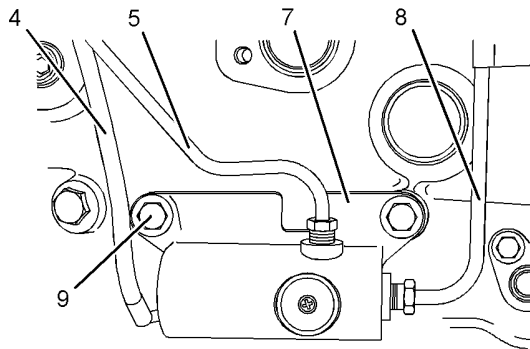


Illustration 70

g01247569

Typical example

2. Disconnect tube assembly (5) from wastegate solenoid (7).
3. Disconnect tube assembly (8) from wastegate solenoid (7). Remove tube assembly (8) from the tube assembly for the oil feed for the turbocharger. Tube assembly (8) is secured to the tube assembly for the oil feed for the turbocharger by spring clips.

Note: Tube assembly (8) must be loose in order to release the tube assembly from the wastegate solenoid.

4. Remove bolts (9) and remove wastegate solenoid (7) from the cylinder block.

Installation Procedure

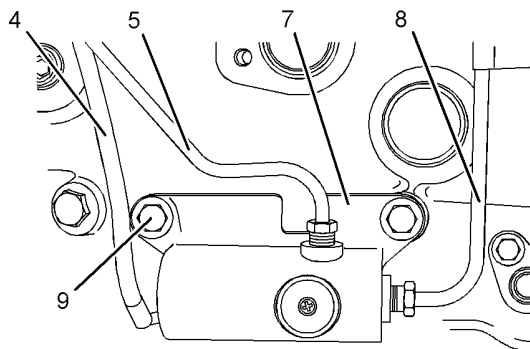


Illustration 71

g01247569

Typical example

1. Loosely install wastegate solenoid (7) to tube assembly (5).
2. Loosely install tube assembly (8) to wastegate solenoid (7).
3. Install bolts (9). Tighten bolts (9) to a torque of 44 N·m (32 lb ft).

4. Tighten tube assembly (5) and tube assembly (8) to a torque of 18 N·m (13 lb ft).
5. Secure tube assembly (8) to the tube assembly for the oil feed for the turbocharger. Tube assembly (8) is secured by spring clips.

Note: Ensure that the tube assemblies do not contact any other engine component.

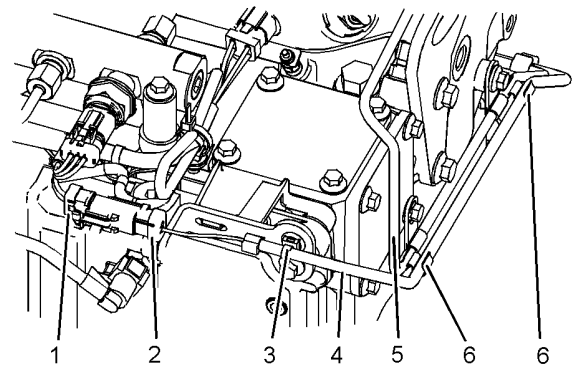


Illustration 72

g01247498

Typical example

6. Follow Step 6 through Step 6.d in order to connect the wire lead for the wastegate solenoid.
 - a. Install harness assembly (4) to tube assembly (5). The harness assembly is secured to the tube assembly by plastic clips (6).
 - b. Connect plug (2) to the engine harness assembly.
 - c. Slide locking tab (1) into the locked position.
 - d. Install new cable straps (3) to the previously identified positions.

i02933629

Exhaust Manifold - Remove and Install (Top Mounted Exhaust Manifold)

Removal Procedure

1. Disconnect all hoses, tube assemblies and wire leads from the turbocharger. Refer to Disassembly and Assembly, "Turbocharger - Remove" for more information.

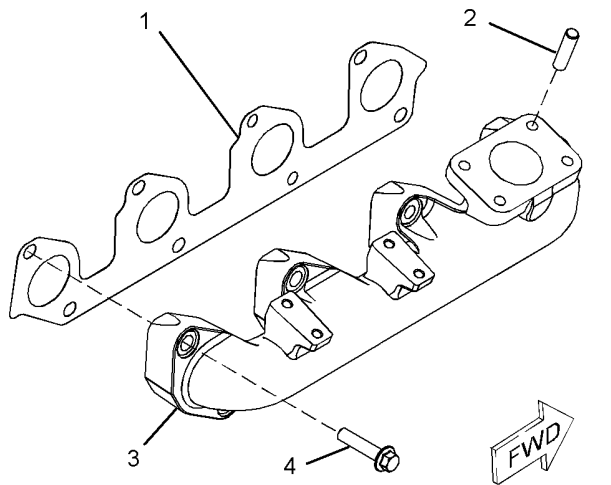


Illustration 73
Typical example

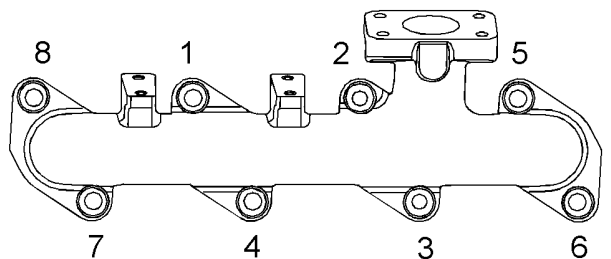


Illustration 74
Tightening sequence for the exhaust manifold

- 2. Loosen bolts (4) in reverse numerical order to the sequence that is shown in Illustration 74.
- Note:** This will help prevent distortion of the exhaust manifold.
- 3. Remove bolts (4) from exhaust manifold (3).
- Note:** Support the manifold as the bolts are removed.
- 4. Remove the assembly of exhaust manifold (3) and the turbocharger.
- 5. Remove exhaust manifold gasket (1).
- 6. Remove the turbocharger from exhaust manifold (3). Refer to Disassembly and Assembly, "Turbocharger - Remove" for more information.
- 7. If necessary, remove studs (2) from exhaust manifold (3).

Installation Procedure (Top Mounted Exhaust Manifold)

Table 15

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud M10 by 100 mm	2

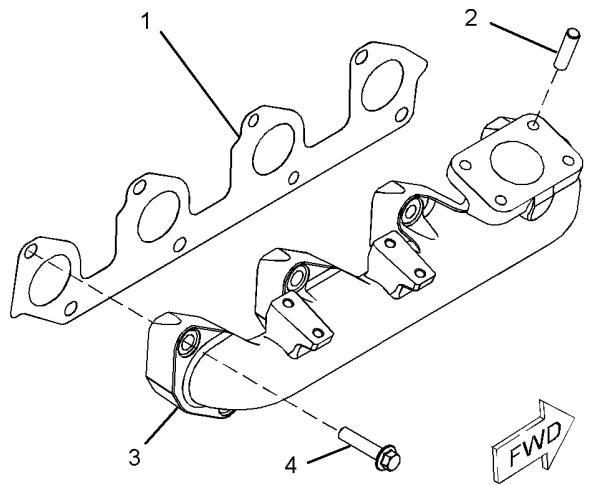


Illustration 75
Typical example

- 1. Ensure that the exhaust manifold is clean and free from damage. If necessary, replace the exhaust manifold. Clean the gasket surface of the cylinder head.
- 2. If necessary, install studs (2) to exhaust manifold (3). Tighten the studs to a torque of 18 N·m (13 lb ft).

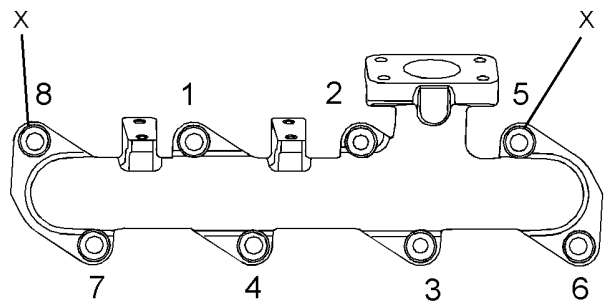


Illustration 76
Tightening sequence for the exhaust manifold

- 3. Install Tooling (A) to the cylinder head in Positions (X). Refer to Illustration 76.

4. Position a new exhaust manifold gasket (1) onto Tooling (A).

Note: Ensure that the exhaust manifold gasket is correctly oriented.

5. Install the tube assembly for the oil drain from the turbocharger to the cylinder block. Refer to Disassembly and Assembly, "Turbocharger - Install" for more information.
6. Align exhaust manifold (3) with Tooling (A). Install the exhaust manifold to the cylinder head.
7. Install new bolts (4) finger tight.
8. Remove Tooling (A). Install remaining bolts (4) finger tight.
9. Tighten bolts (4) to a torque of 40 N·m (30 lb ft) in the sequence that is shown in Illustration 76.

End By:

- a. Install the turbocharger. Refer to Disassembly and Assembly, "Turbocharger - Install".

i03440266

Exhaust Manifold - Remove and Install (Side Mounted Exhaust Manifold)

Removal Procedure

Start By:

- a. Remove the turbocharger. Refer to Disassembly and Assembly, "Turbocharger - Remove".

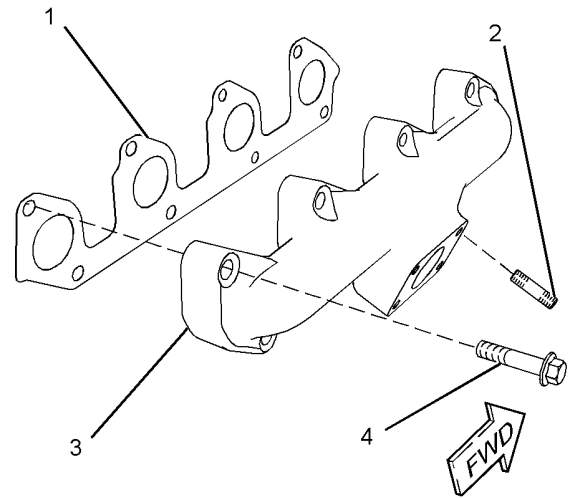


Illustration 77
Typical example

g01789922

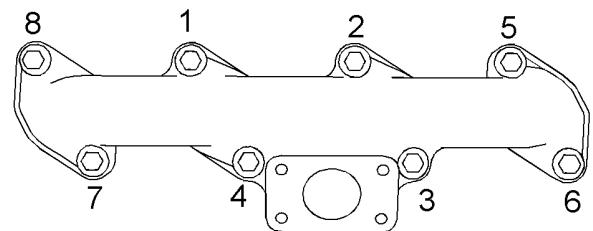


Illustration 78
Tightening sequence for the exhaust manifold

g01789982

1. Loosen bolts (4) in reverse numerical order. Refer to Illustration 78.

Note: This will help prevent distortion of the exhaust manifold.

2. Remove bolts (4) from exhaust manifold (3).

Note: Support the manifold as the bolts are removed.

3. Remove exhaust manifold (3).



4. Remove exhaust manifold gasket (1).

5. If necessary, remove studs (2) from exhaust manifold (3).

Installation Procedure (Side Mounted Exhaust Manifold)

Table 16

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud M10 by 100 mm	4

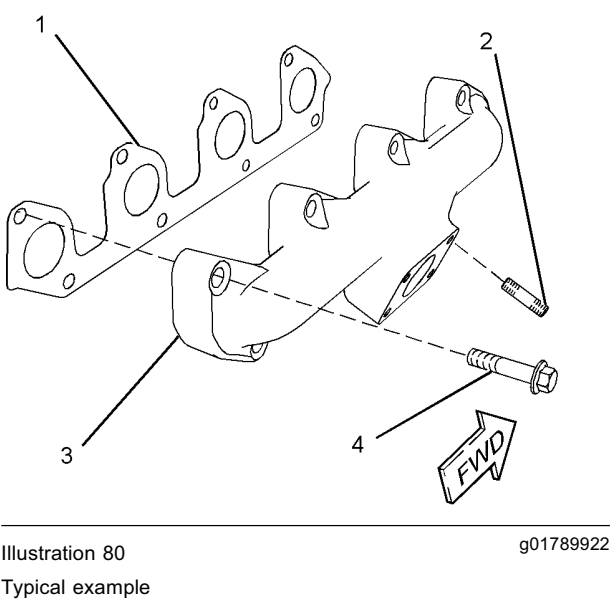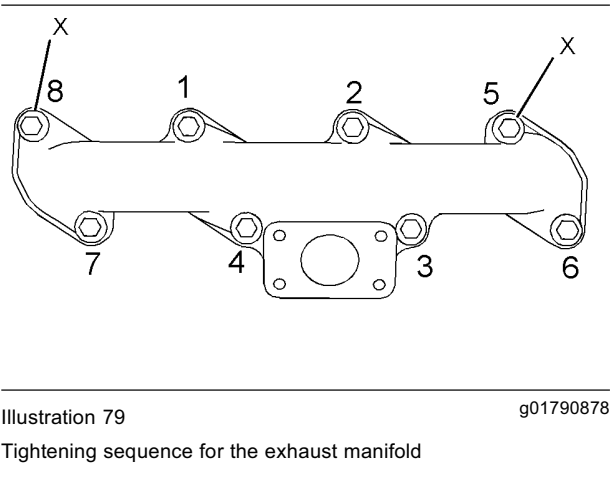


1. Ensure that the exhaust manifold is clean and free from damage. If necessary, replace the exhaust manifold. Clean the gasket surface of the cylinder head.
2. If necessary, install studs (2) to exhaust manifold (3). Tighten the studs to a torque of 18 N·m (13 lb ft).
3. Install Tooling (A) to the cylinder head in Positions (X). Refer to Illustration 79.

4. Position a new exhaust manifold gasket (1) onto Tooling (A).
- Note:** Ensure that the exhaust manifold gasket is correctly oriented.
5. Align exhaust manifold (3) with Tooling (A). Install the exhaust manifold to the cylinder head.
 6. Install new bolts (4) finger tight.
 7. Remove Tooling (A). Install remaining bolts (4) finger tight.
 8. Tighten bolts (4) to a torque of 40 N·m (30 lb ft). Tighten the bolts in the sequence that is shown in Illustration 79.

- End By:**
- a. Install the turbocharger. Refer to Disassembly and Assembly, "Turbocharger - Install".

i02933628
Exhaust Elbow - Remove and Install

Removal Procedure

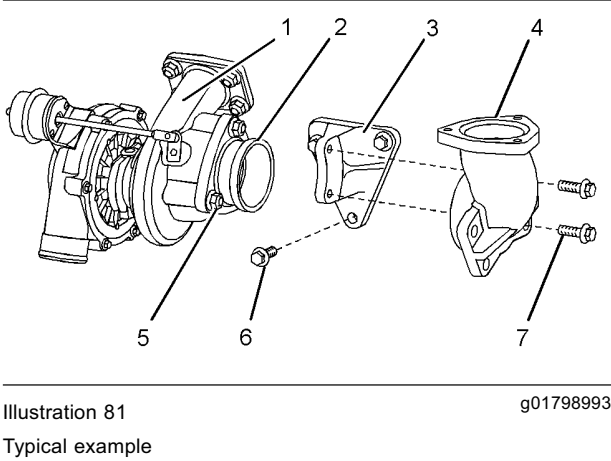

1. Remove bolts (7) and remove exhaust elbow (4) from turbocharger (1). Note the orientation of the exhaust elbow.
2. Remove nuts (5) and remove adapter (2).
3. If necessary, remove bolts (6) and remove support bracket (3) from the cylinder block.

Installation Procedure

i02933660

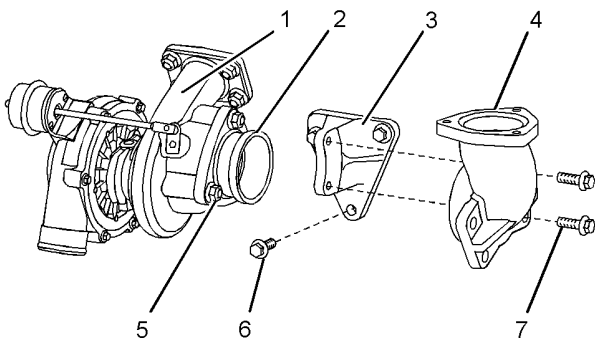


Illustration 82

g01798993

Typical example

1. Ensure that the exhaust elbow, the adapter and the outlet of the turbocharger are free from damage. Replace any components that are damaged.
2. Install adapter (2) to turbocharger (1).
3. Install nuts (5). Tighten the nuts progressively. Tighten nuts (5) to a torque of 25 N·m (18 lb ft).
4. If necessary, install support bracket (3) to the cylinder block and install bolts (6). Tighten the bolts to a torque of 44 N·m (32 lb ft).
5. Install bolts (7) finger tight.
6. Ensure that the gap between the turbocharger and the exhaust elbow is evenly spaced.
7. Tighten bolts (7) to a torque of 44 N·m (32 lb ft).

Inlet and Exhaust Valve Springs - Remove and Install

Removal Procedure

Table 17

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1
B	21825739	Valve Spring Compressor	1
	27610235	Adapter	1
	27610295	Head	1
C ⁽¹⁾	21825576	Crankshaft Turning Tool	1
C ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1

(1) The Crankshaft Turning Tool is used on the front pulley.

(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. Remove the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Remove".

Note: Either Tooling (C) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The following procedure should be adopted in order to remove the valve springs when the cylinder head is installed to the engine. Refer to Disassembly and Assembly, "Inlet and Exhaust Valves - Remove and Install" for the procedure to remove the valve springs from a cylinder head that has been removed from the engine.

Note: Ensure that the appropriate piston is at the top center position before the valve spring is removed. Failure to ensure that the piston is at the top center position may allow the valve to drop into the cylinder bore.

NOTICE

Plug the apertures for the push rods in the cylinder head in order to prevent the entry of loose parts into the engine.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

1. Turn the battery disconnect switch to the OFF position.

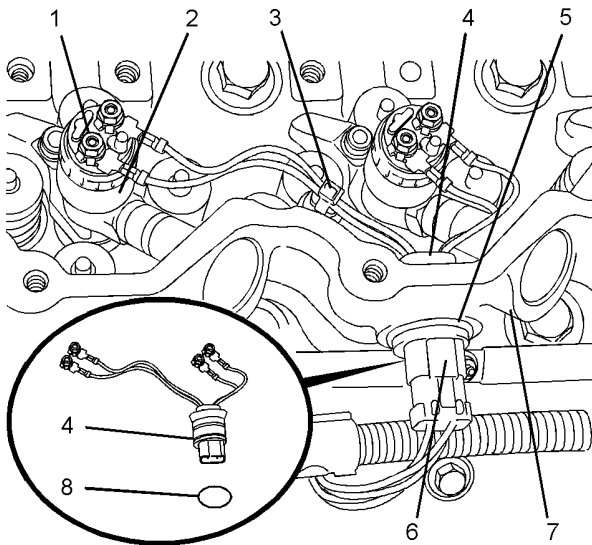


Illustration 83

g01469791

Typical example

2. Follow Step 2.a through Step 2.h in order to remove the harness assemblies for the electronic unit injectors.
 - a. Place a temporary identification mark on connections (1).
 - b. Use a deep socket to remove connections (1) from electronic unit injectors (2).
 - c. Cut cable strap (3).
 - d. Disconnect plug (6) from harness assembly (4).
 - e. Use Tooling (A) to remove circlip (5).
 - f. From the outside of valve mechanism cover base (7), push harness assembly (4) inward. Withdraw the harness assembly from the valve mechanism cover base.
 - g. Remove O-ring seal (8) from harness assembly (4).
 - h. Repeat Step 2.a through Step 2.g in order to remove the remaining harness assembly.

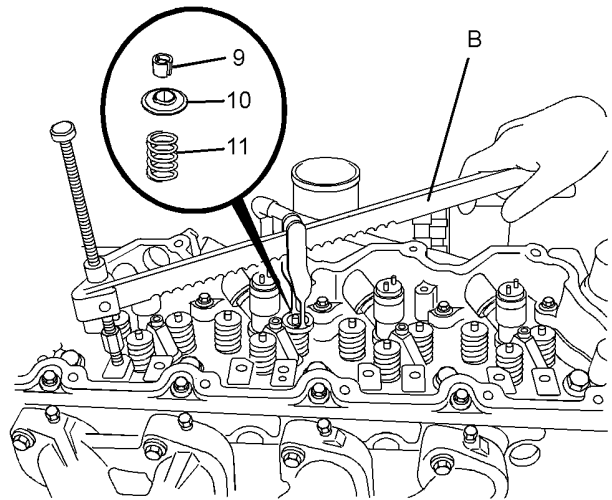


Illustration 84

g01469792

Typical example

⚠ WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

NOTICE

Ensure that the valve spring is compressed squarely or damage to the valve stem may occur.

3. Follow Step 3.a through Step 3.d in order to position the appropriate piston at top dead center.
 - a. Install Tooling (B) in position on the cylinder head in order to compress a valve spring for the appropriate piston.
 - b. Use Tooling (B) in order to compress valve spring (11) and open the valve slightly.
- Note:** Do not compress the spring so that valve spring retainer (10) touches the valve stem seal.
- c. Use Tooling (C) in order to rotate the crankshaft carefully, until the piston touches the valve.

Note: Do not use excessive force to turn the crankshaft. The use of force can result in bent valve stems.

- d. Continue to rotate the crankshaft and gradually release the pressure on Tooling (B) until the piston is at the top center position. The valve is now held in a position that allows the valve spring to be safely removed.

Note: Valve springs must be replaced in pairs for the inlet valve or the exhaust valve of each cylinder. If all valve springs require replacement the procedure can be carried out on two cylinders at the same time. The procedure can be carried out on the following pairs of cylinders. 1 with 4 and 2 with 3. Ensure that all of the valve springs are installed before changing from one pair of cylinders to another pair of cylinders.

NOTICE

Do not turn the crankshaft while the valve springs are removed.

4. Apply sufficient pressure to Tooling (B) in order to allow removal of valve keepers (9).

Note: Do not compress the spring so that valve spring retainer (10) touches the valve stem seal .

Remove valve keepers (9).

5. Slowly release the pressure on Tooling (B).
6. Remove valve spring retainer (10) and remove valve spring (11).
7. If necessary, remove the valve stem seals.
8. Repeat Step 4 through Step 7 in order to remove the remaining valve springs from the appropriate cylinder.
9. Remove Tooling (B).

Installation Procedure

Table 18

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1
B	21825739	Valve Spring Compressor	1
	27610235	Adapter	1
	27610295	Head	1
C ⁽¹⁾	21825576	Crankshaft Turning Tool	1
C ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
D	21820221	POWERPART Rubber Grease	1
E	27610296	Torque Wrench	1

(1) The Crankshaft Turning Tool is used on the front pulley.

(2) This Tool is used in the aperture for the electric starting motor.

Note: Either Tooling (C) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Do not turn the crankshaft while the valve springs are removed.

NOTICE

Plug the apertures for the push rods in the cylinder head in order to prevent the entry of loose parts into the engine.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

1. Inspect the valve springs for the correct length. Refer to Specifications, "Cylinder Head Valves".
2. If necessary, install a new valve stem seal onto the valve guide.

Note: The outer face of the valve guide must be clean and dry before installing the valve stem seal.

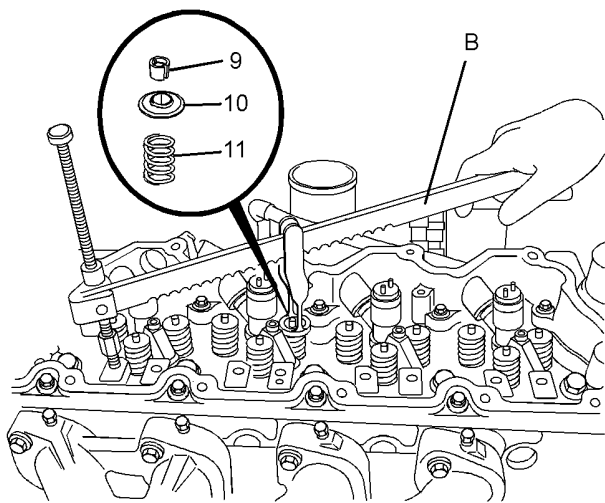


Illustration 85

g01469792

Typical example

3. Install valve spring (11) onto the cylinder head. Position valve spring retainer (10) onto valve spring (11).

WARNING

Improper assembly of parts that are spring loaded can cause bodily injury.

To prevent possible injury, follow the established assembly procedure and wear protective equipment.

NOTICE

Ensure that the valve spring is compressed squarely or damage to the valve stem may occur.

4. Install Tooling (B) in the appropriate position on the cylinder head in order to compress the valve spring.
5. Apply sufficient pressure to Tooling (B) in order to install valve keepers (9).

Note: Do not compress the spring so that valve spring retainer (10) touches the valve stem seal.

Install the valve spring keepers.

6. Carefully release the pressure on Tooling (B).

Note: Ensure that the valve keepers are correctly seated.

7. Repeat Step 2 through Step 6 for the remaining valves.

WARNING

The valve spring keepers can be thrown from the valve when the valve spring compressor is released. Ensure that the valve spring keepers are properly installed on the valve stem. To help prevent personal injury, keep away from the front of the valve spring keepers and valve springs during the installation of the valves.

8. Remove Tooling (B).

Note: Valve springs must be replaced in pairs for the inlet valve or the exhaust valve of each cylinder. If all valve springs require replacement the procedure can be carried out on two cylinders at the same time. The procedure can be carried out on the following pairs of cylinders. 1 with 4 and 2 with 3. Ensure that all of the valve springs are installed before changing from one pair of cylinders to another pair of cylinders.

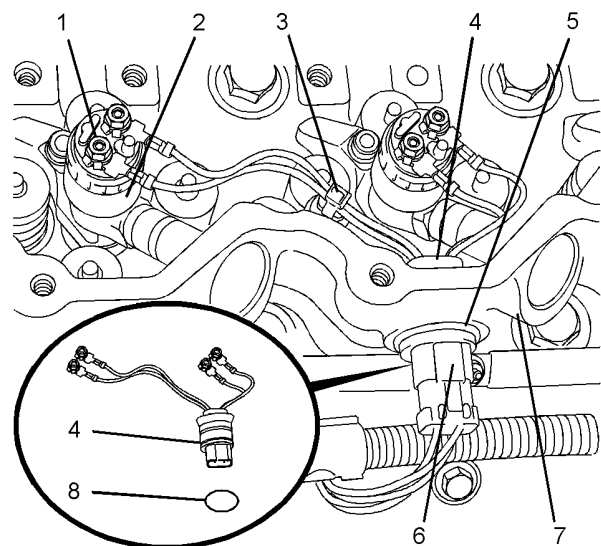


Illustration 86

g01469791

Typical example

9. Follow Step 9.a through Step 9.g in order to install the harness assemblies for the electronic unit injectors.
 - a. Ensure that harness assembly (4) and the bore in the valve mechanism cover base (7) are clean and free from damage.
 - b. Use Tooling (D) to lubricate a new O-ring seal. Install new O-ring seal (8) onto harness assembly (4).
 - c. From the inside of valve mechanism cover base (7), push harness assembly (4) into the valve mechanism cover base.
 - d. Use Tooling (A) to install circlip (5).

- e. Connect plug (6) to harness assembly (4).
- f. Use a deep socket to install connections (1) to electronic unit injectors (2). Use Tooling (E) to tighten the connections to a torque of 2.5 N·m (22 lb in).
- g. Install a new cable strap (3).

Note: Ensure that the cable straps conform to the Perkins specification.

- h. Repeat Step 9.a through Step 9.g in order to install the remaining harness assembly.

10. Turn the battery disconnect switch to the ON position.

End By:

- a. Install the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrods - Install".

i02933661

Inlet and Exhaust Valves - Remove and Install

Removal Procedure

Table 19

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825666	Valve Spring Compressor	1
	27610235	Adapter	1
	27610295	Head	1

Start By:

- a. Remove the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

- 1. Clean the bottom face of the cylinder head. Check the depth of the valves below the face of the cylinder head before the valve springs are removed. Refer to Specifications, "Cylinder Head Valves" for the correct dimensions.

- 2. Place a temporary identification mark on the heads of the valves in order to identify the correct position. Inlet valves have a recess in the center of the head.

Note: Do not stamp the heads of the valve. Stamping or punching the heads of the valves could cause the valves to fracture.

- 3. Use a suitable lifting device to position the cylinder head with the valve springs upward. The weight of the cylinder head is approximately 56 kg (125 lb).

Note: Ensure that the cylinder head is kept on a clean, soft surface in order to prevent damage to the machined face.

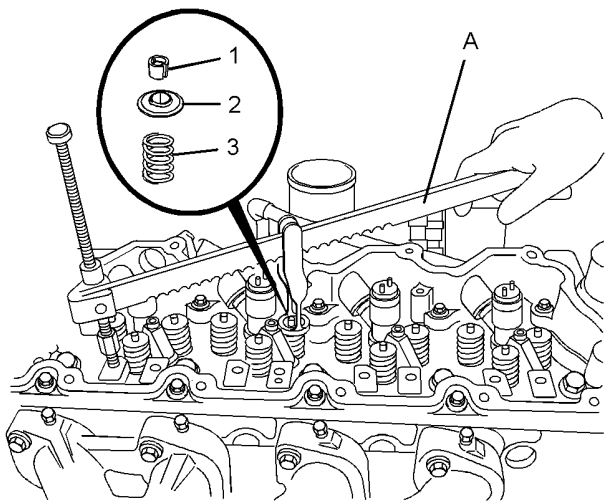


Illustration 87
Typical example

g01469809

⚠ WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

- 4. Install Tooling (A) in position on the cylinder head in order to compress the appropriate valve spring.

NOTICE

Ensure that the valve spring is compressed squarely or damage to the valve stem may occur.

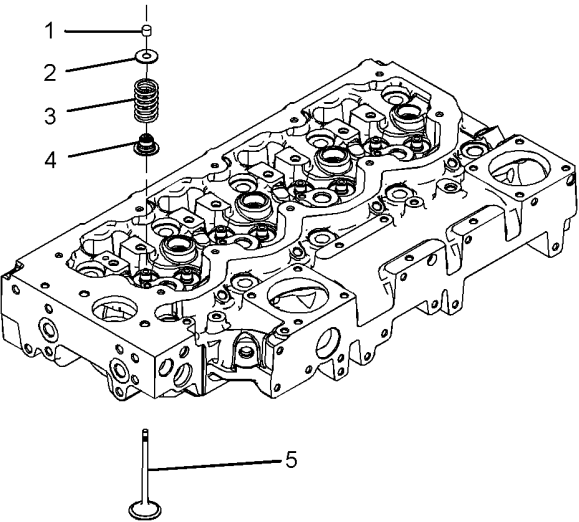


Illustration 88

g01245105

5. Apply sufficient pressure to Tooling (A) in order to remove valve keepers (1).

Note: Do not compress the spring so that valve spring retainer (2) touches valve stem seal (4).

6. Slowly release the pressure on Tooling (A).

7. Remove valve spring retainer (2). Remove valve spring (3).

8. Repeat Step 4 through Step 7 for the remaining valves.

9. Remove Tooling (A).

10. Remove valve stem seals (4).

11. Use a suitable lifting device to carefully turn over the cylinder head.

12. Remove valves (5).

Installation Procedure

Table 20

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825666	Valve Spring Compressor	1
	27610235	Adapter	1
	27610295	Head	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Clean all components of the cylinder head assembly. Ensure that all ports, all coolant passages and all lubrication passages in the cylinder head are free from debris. Follow Step 1.a through Step 1.e in order to inspect the components of the cylinder head assembly. Replace any components that are worn or damaged.
 - a. Inspect the cylinder head for wear and for damage. Refer to Systems Operation, Testing and Adjusting, "Cylinder Head Inspect".
 - b. Inspect the valve seats for wear and for damage. Refer to Specifications, "Cylinder Head Valves" for further information.
 - c. Inspect the valve guides for wear and for damage. Refer to Specifications, "Cylinder Head Valves" and Systems Operation, Testing and Adjusting, "Valve Guide - Inspect" for further information.
 - d. Inspect the valves for wear and for damage. Refer to Specifications, "Cylinder Head Valves".
 - e. Inspect the valve springs for damage and for the correct length. Refer to Specifications, "Cylinder Head Valves".

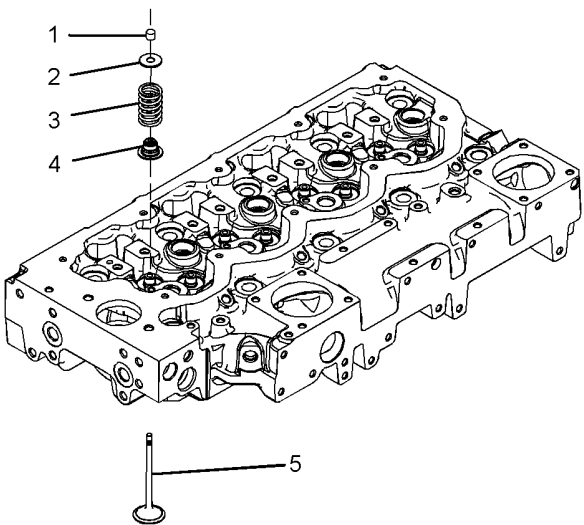


Illustration 89

g01245105

2. Lubricate the stems of valves (5) with clean engine oil. Install valves (5) in the appropriate positions in the cylinder head. Check the depth of the valves below the face of the cylinder head. Refer to Systems Operation, Testing and Adjusting, "Valve Depth - Inspect" for more information.
3. Use a suitable lifting device to carefully turn over the cylinder head. The weight of the cylinder head is approximately 56 kg (125 lb).

Note: Ensure that all of the valves remain in place.

4. Install new valve stem seals (4) onto each of the valve guides.

Note: The outer face of the valve guides must be clean and dry before installing the valve stem seals.

5. Install valve spring (3) onto the cylinder head. Position valve spring retainer (2) onto valve spring (3).

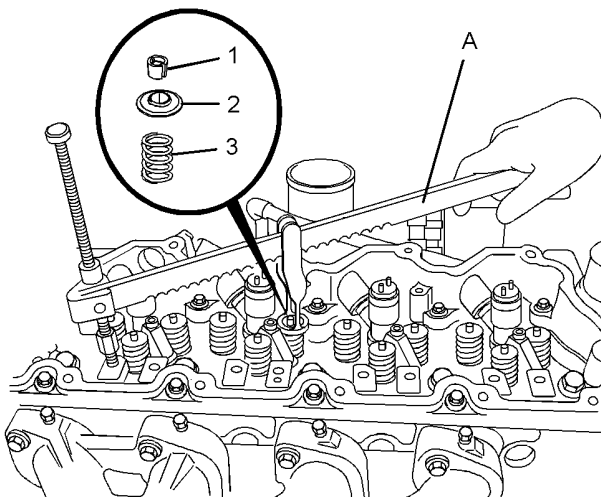


Illustration 90

g01469809

Typical example

WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

6. Install Tooling (A) in the appropriate position on the cylinder head in order to compress valve spring (3).

NOTICE

Ensure that the valve spring is compressed squarely or damage to the valve stem may occur.

7. Apply sufficient pressure to Tooling (A) in order to install valve keepers (1).

Note: Do not compress the spring so that valve spring retainer (2) touches valve stem seal (4).

WARNING

The valve spring keepers can be thrown from the valve when the valve spring compressor is released. Ensure that the valve spring keepers are properly installed on the valve stem. To help prevent personal injury, keep away from the front of the valve spring keepers and valve springs during the installation of the valves.

8. Carefully release the pressure on Tooling (A).
9. Repeat Step 5 through Step 8 for the remaining valves.
10. Remove Tooling (A) from the cylinder head.
11. Use a suitable lifting device to position the cylinder head on a support. Ensure that the heads of the valves are not obstructed.

End By:

- a. Install the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Install".

i02933621

Engine Oil Filter Base - Remove and Install

Removal Procedure

Table 21

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Strap Wrench	1

Note: The oil filter may be installed vertically or the oil filter may be installed horizontally.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting, and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

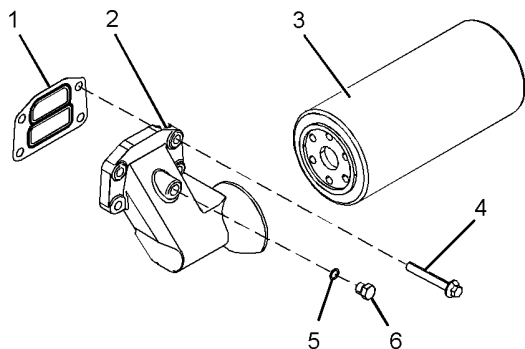


Illustration 91

g01254186

Typical example

1. Use Tooling (A) to remove engine oil filter (3). Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change".
2. If the engine oil pressure sensor is located in the engine oil filter base, remove the engine oil pressure sensor. Refer to Disassembly and Assembly, "Engine Oil Pressure Sensor - Remove and Install".
3. Remove bolts (4) and remove engine oil filter base (2).
4. Remove gasket (1).
5. If the engine oil filter base has a spacer plate, remove the spacer plate and remove the gasket.

Note: Mark the orientation of the spacer plate.

6. If necessary, remove plug (6) from engine oil filter base (2). Remove O-ring seal (5) from the plug.

Installation Procedure

Table 22

Required Tools			
Tool	Part Number	Part Description	Qty
B	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

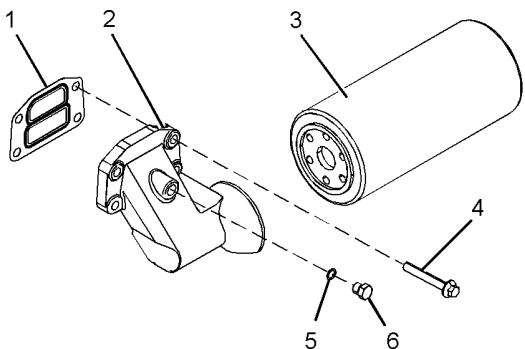


Illustration 92

g01254186

Typical example

1. Ensure that the engine oil filter base is clean. Clean the gasket surface of the cylinder block.
 2. If necessary, install a new O-ring seal (5) to plug (6). Install plug (6) to engine oil filter base (2). Tighten the plug to a torque of 12 N·m (106 lb in).
 3. Install bolts (4) to engine oil filter base (2).
 4. Install a new gasket (1) onto bolts (4). If the engine oil filter base has a spacer plate, install the spacer plate and a new gasket onto the bolts.
- Note:** Ensure the correct orientation of spacer plate.
5. Apply Tooling (B) to the threads of the bolts. Install the assembly of the engine oil filter base to the cylinder block.
 6. Tighten bolts (4) to a torque of 22 N·m (16 lb ft).
 7. If the engine oil pressure sensor is located in the engine oil filter base, Install the engine oil pressure sensor. Refer to Disassembly and Assembly, "Engine Oil Pressure Sensor - Remove and Install".

8. Install a new engine oil filter (3). If necessary, fill the engine oil pan to the correct level that is indicated on the oil level gauge. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change".

i02933620

Engine Oil Cooler - Remove

Removal Procedure

Start By:

- a. Remove the bracket for the Electronic Control Module. Refer to Disassembly and Assembly, "ECM Mounting Bracket - Remove and Install".

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Drain the coolant from the cooling system into a suitable container. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.

2. Drain the engine lubricating oil into a suitable container. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.
3. If necessary, remove the electric starting motor. Refer to Disassembly and Assembly, "Electric Starting Motor - Remove and Install".
4. Position the engine wiring harness away from the assembly of oil cooler (1). If necessary, cut the cable strap.

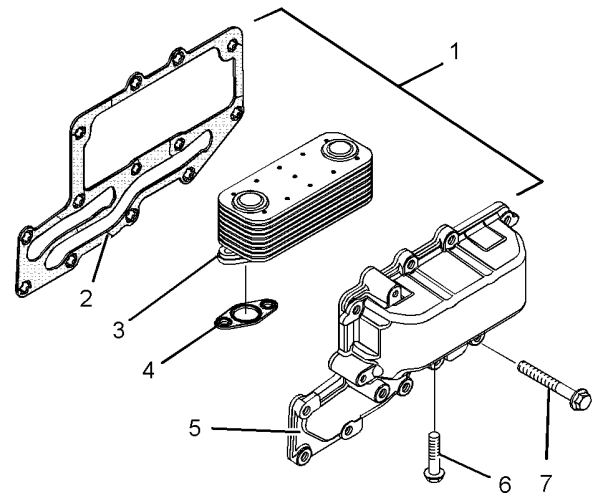


Illustration 93
Typical example

g01254472

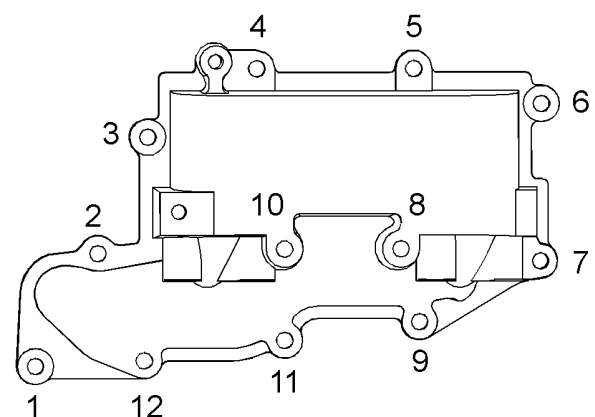


Illustration 94
Tightening sequence for the engine oil cooler

g01254473

5. Loosen bolts (7) in reverse numerical order to the sequence that is shown in Illustration 94. Remove bolts (7). Support the assembly of engine oil cooler (1) as the bolts are removed.

Note: Bolts of different lengths are installed. Note the correct position of the bolts. Note the position of any brackets that are secured by the bolts. Do not remove bolts (6) at this time.

6. Remove the assembly of oil cooler (1) from the cylinder block.
7. Remove gasket (2).
8. Follow Step 8.a through Step 8.c in order to disassemble the engine oil cooler.
 - a. Remove bolts (6).
 - b. Remove cooler matrix (3) from housing (5).
 - c. Remove gaskets (4).

i02933619

Engine Oil Cooler - Install

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

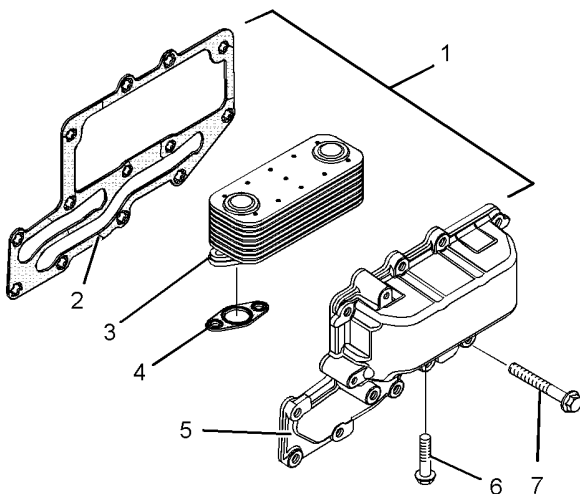


Illustration 95

Typical example

g01254472

1. Follow Step 1.a through Step 1.c in order to assemble the engine oil cooler.
 - a. Ensure that cooler matrix (3) is clean and free from damage. Ensure that housing (5) is clean and free from damage. Replace any damaged components.
 - b. Position new gasket (4) onto housing (5). Install cooler matrix (3).
 - c. Install bolts (6) finger tight.
2. Clean the gasket surface of the cylinder block.
3. Install bolts (7) to the engine oil cooler.

Note: The bolts are different lengths. Ensure that the different bolts are installed in the correct location. Ensure that any brackets that are secured by the bolts are installed in the correct location.

4. Install a new gasket (2) to the assembly of oil cooler (1). Push bolts (7) through the holes in the gasket.

Note: The holes in the gasket have serrations that hold the bolts captive.

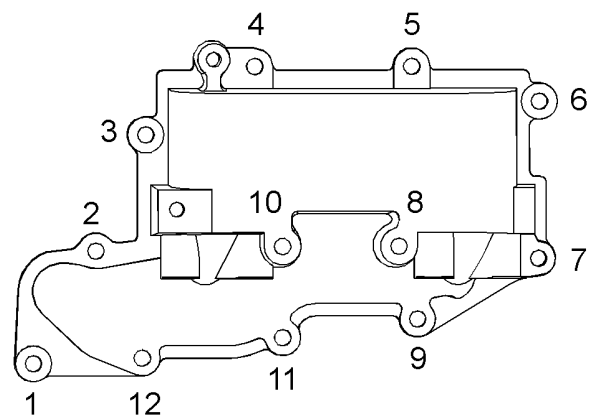


Illustration 96

g01254473

Tightening sequence for the engine oil cooler

5. Install the assembly of oil cooler (1) to the cylinder block. Tighten bolts (7) to a torque of 22 N·m (16 lb ft). Tighten the bolts in the sequence that is shown in Illustration 96.

Tighten bolts (6) to a torque of 22 N·m (16 lb ft). Refer to Illustration 95.

6. Place the engine wiring harness in the correct position. If necessary, install a new cable strap.

7. If necessary, Install the electric starting motor.
Refer to Disassembly and Assembly, "Electric Starting Motor - Remove and Install".
8. Fill the cooling system to the correct level.
Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.
9. Fill the engine oil pan to the correct level. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.

End By:

- a. Install the bracket for the Electronic Control Module. Refer to Disassembly and Assembly, "ECM Bracket - Remove and Install".

i02933626

Engine Oil Relief Valve - Remove and Install (Engines with a Balancer Unit)

Removal Procedure

Table 23

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Telescopic Magnet	1

Start By:

- a. Remove the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

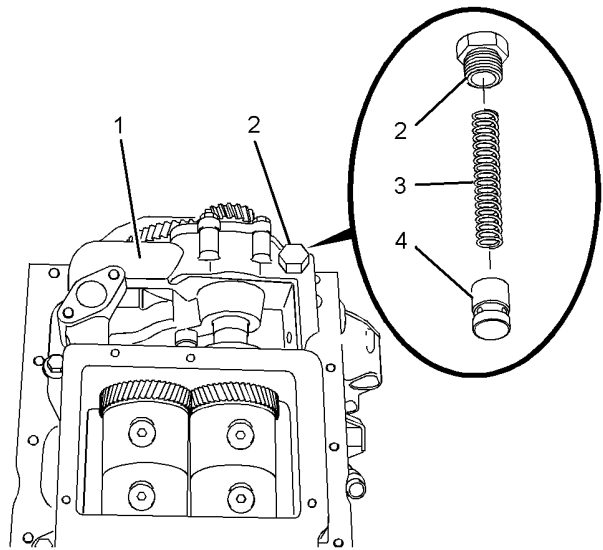


Illustration 97

g01470291

Typical example

⚠ WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

1. Loosen cap (2). Carefully remove the cap from balancer (1).

Note: The spring force will be released when the cap is removed.

2. Remove spring (3) from the bore for the relief valve in balancer (1).
3. Use Tooling (A) in order to remove plunger (4) from the bore for the relief valve in balancer (1).

Installation Procedure

Table 24

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Telescopic Magnet	1
B	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

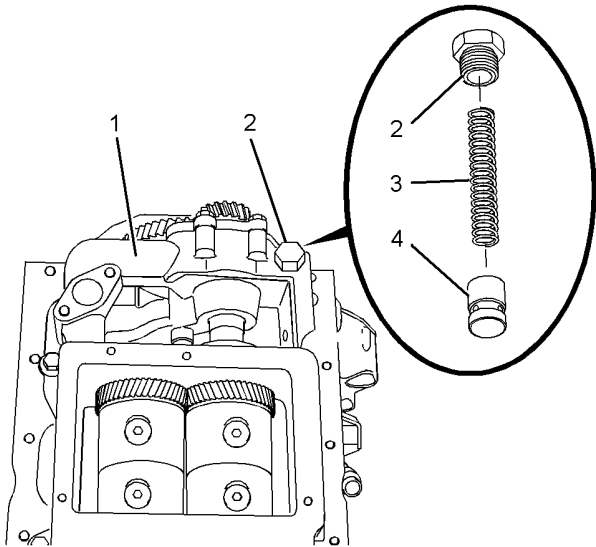


Illustration 98

g01470291

Typical example

WARNING

Improper assembly of parts that are spring loaded can cause bodily injury.

To prevent possible injury, follow the established assembly procedure and wear protective equipment.

1. Ensure that all components are clean and free from wear or damage. If necessary, replace any components that are worn or damaged. If the bore for the relief valve in balancer (1) is worn or damaged, the complete assembly of the balancer must be replaced.

2. Lubricate plunger (4) with clean engine oil. Install plunger (4) and spring (3) into the bore for the relief valve in balancer (1).

Note: The plunger must slide freely in the bore for the relief valve.

3. Apply Tooling (B) to the threads of cap (2). Install cap (2) to balancer (1). Tighten the cap to a torque of 21 N·m (15 lb ft).

Note: Ensure that the spring is properly located inside the plunger and the cap. Ensure that Tooling (B) does not contaminate the bore for the relief valve in balancer (1).

End By:

- a. Install the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

i02933627

Engine Oil Relief Valve - Remove and Install (Engines Without a Balancer Unit)

Removal Procedure

Table 25

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Telescoping Magnet	1

Start By:

- a. Remove the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

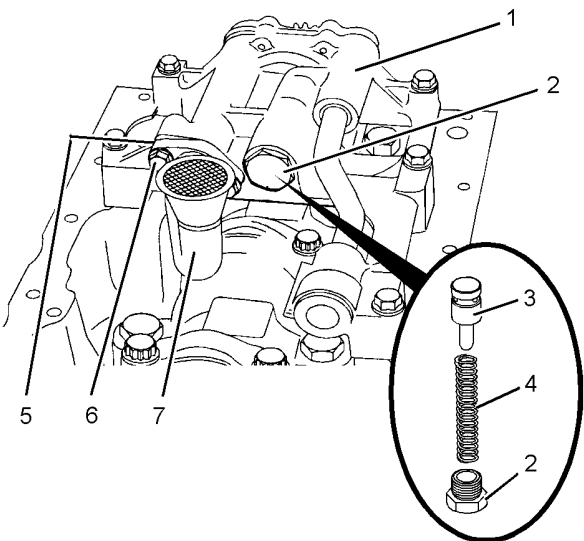


Illustration 99

g01470289

Typical example

WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

1. Remove bolts (6) and suction pipe (7).
2. Remove gasket (5) (not shown) from the suction pipe .
3. Loosen cap (2). Carefully remove cap (2) from the housing of engine oil pump (1).

Note: The spring force will be released when the cap is removed.

4. Remove spring (4) from the bore for the relief valve in the housing of engine oil pump (1).
5. Use Tooling (A) to remove plunger (3) from the bore for the relief valve in the housing of engine oil pump (1).

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

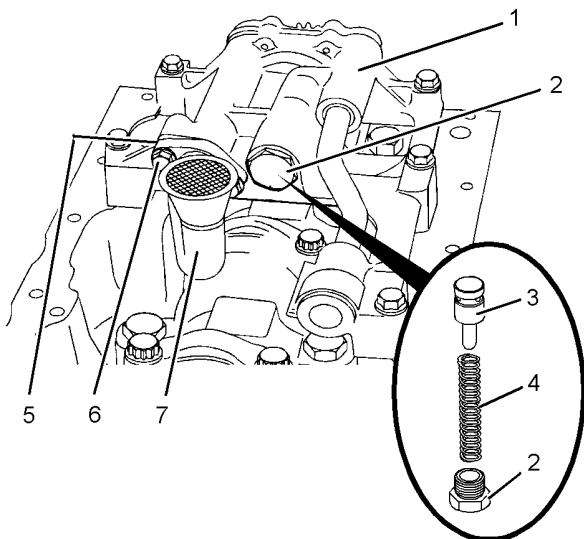


Illustration 100
Typical example

g01470289

WARNING

Improper assembly of parts that are spring loaded can cause bodily injury.

To prevent possible injury, follow the established assembly procedure and wear protective equipment.

1. Ensure that all components are clean and free from wear or damage. If necessary, replace any components that are worn or damaged. If the bore for the relief valve in the housing of engine oil pump (1) is worn or damaged, the complete assembly of the engine oil pump must be replaced.
2. Lubricate plunger (3) with clean engine oil. Use long nose pliers to install plunger (3) and spring (4) into the bore for the relief valve in the housing of engine oil pump (1).

Note: The plunger must slide freely in the bore for the relief valve.

3. Install cap (2) to engine oil pump (1). Tighten the cap to a torque of 45 N·m (33 lb ft).

Note: Ensure that the spring is properly located inside the plunger and the cap.

4. Install suction pipe (7) and a new gasket (5) (not shown) to the assembly of the engine oil pump.
5. Install bolts (6). Tighten the bolts to a torque to 22 N·m (16 lb ft).

End By:

- a. Install the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

i02933625

Engine Oil Pump - Remove and Install (Engines Without a Balancer Unit)

Removal Procedure

Start By:

- a. Remove the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

Note: This procedure is for the removal of the engine oil pump on engines that are not equipped with a balancer. Refer to Disassembly and Assembly, “Balancer - Remove” for information on the removal of the engine oil pump for engines that are equipped with a balancer.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

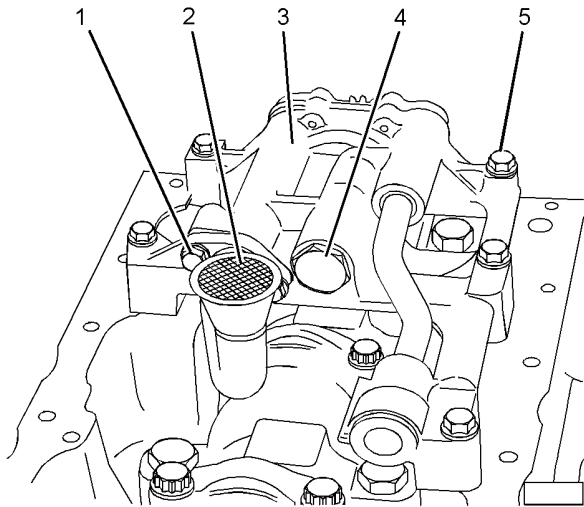


Illustration 101

g01255703

Typical example

1. Remove bolts (1) and suction pipe (2).
2. Remove the gasket from the suction pipe.
3. Remove bolts (5). Remove the assembly of the engine oil pump (3) from the cylinder block.
4. If necessary, remove pressure relief valve (4) from the housing of engine oil pump (3). Refer to Disassembly and Assembly, “Engine Oil Relief Valve - Remove and Install”.

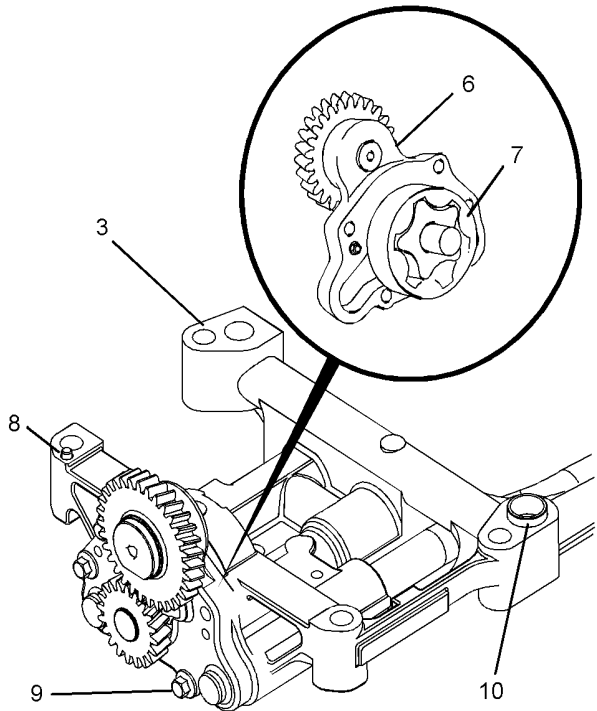


Illustration 102

g01470295

Typical example

5. If necessary, remove bolts (9) and front cover assembly (6). Remove outer rotor (7) from the housing of engine oil pump (3).

Note: Do not remove dowels (8) and (10) from the housing of the engine oil pump unless the dowels are damaged.

Installation Procedure

Table 26

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825617	Dial Indicator Group	1
	-	Finger Clock	1

Note: This procedure is for the installation of the engine oil pump on engines that are not equipped with a balancer. Refer to Disassembly and Assembly, “Balancer - Install” for information on the installation of the engine oil pump for engines that are equipped with a balancer.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

If any of the parts on the engine oil pump are worn or damaged, the entire pump must be replaced.

1. Ensure that all components of the engine oil pump are clean and free from wear or damage. Check the clearance between the outer rotor of the oil pump and the oil pump body. Check the clearance between the outer rotor and the inner rotor. Check the end play of the rotor. Refer to Systems Operation, Testing and Adjusting, "Engine Oil Pump - Inspect". Replace the complete assembly of the engine oil pump if any of the components are worn or damaged.

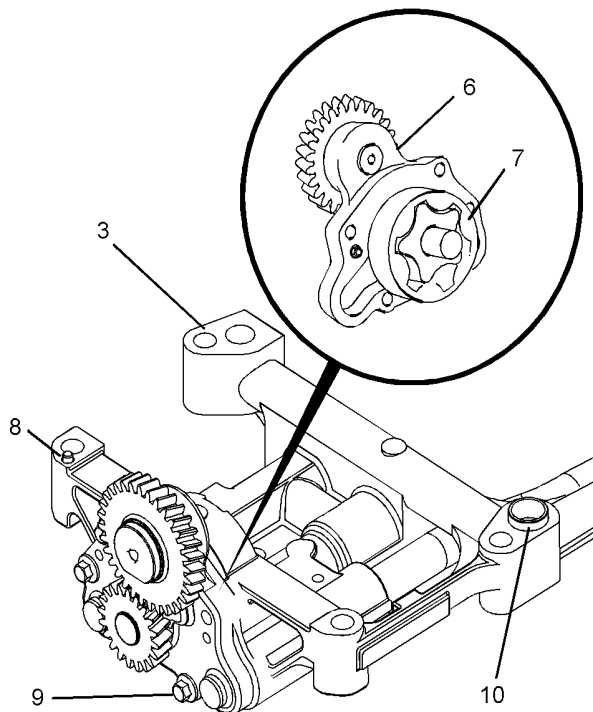


Illustration 103
Typical example

2. If necessary, lubricate the internal components of the assembly of the engine oil pump with clean engine oil. Install outer rotor (7) and front cover (6) to the housing of engine oil pump (3). Install bolts (9). Tighten the bolts to a torque of 9.5 N·m (84 lb in).

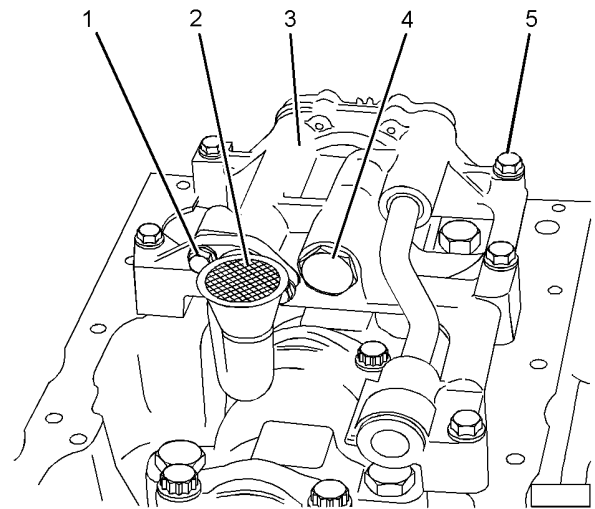


Illustration 104

g01255703

Typical example

3. If necessary, install pressure relief valve (4). Refer to Disassembly and Assembly, "Engine Oil Relief Valve - Remove and Install" for further information.
4. Ensure that dowel (8) and dowel (10) are correctly located in the housing of engine oil pump (3). Position the assembly of the engine oil pump onto the cylinder block.

Note: Ensure that the dowels in the housing of the engine oil pump are aligned with the holes in the cylinder block.

5. Install bolts (5). Tighten the bolts to a torque of 44 N·m (32 lb ft).
6. Install suction pipe (2) and a new gasket to the assembly of the engine oil pump.
7. Install bolts (1). Tighten the bolts to a torque to 22 N·m (16 lb ft).
8. Use Tooling (A) in order to check the backlash between the idler gear of the oil pump and the crankshaft gear. Refer to Specifications, "Gear Group - Front" for further information.

End By:

- a. Install the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".

i02933681

Water Pump - Remove

Removal Procedure

Start By:

- a. Remove the fan and the fan pulley. Refer to Disassembly and Assembly, "Fan - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Drain the coolant from the cooling system into a suitable container for storage or disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.
2. Loosen the hose clamps and remove the hose from the water pump inlet.

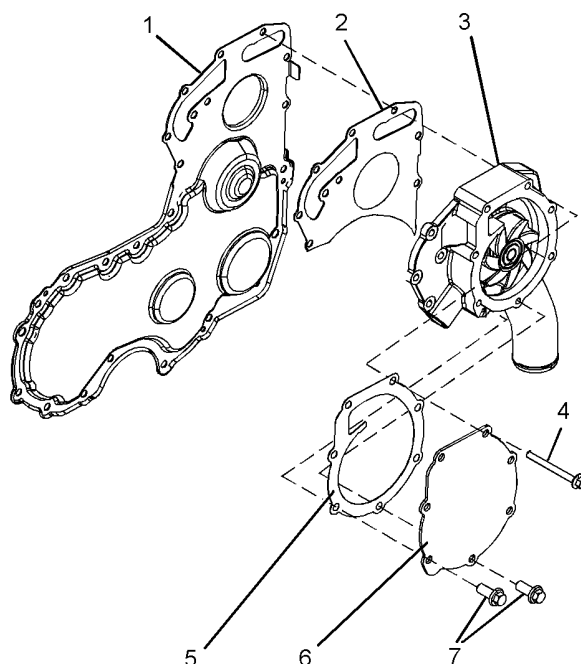


Illustration 105

g01263054

Typical example

3. Remove bolts (4). The bolts are different lengths. Note the positions of the different bolts.

Note: Do not remove bolts (7) at this time.

4. Remove water pump (3) from front cover (1).

Note: If necessary, tap the water pump with a soft hammer in order to loosen the water pump.

5. Remove gasket (2).
6. If necessary, remove cover (6) from the water pump. Follow Step 6.a through Step 6.c in order to remove the cover.
 - a. Remove bolts (7).
 - b. Remove cover (6).
 - c. Remove gasket (5).

i02933680

Water Pump - Install

Installation Procedure

Table 27

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud M8 by 80 mm	2

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the water pump is clean and free from wear or damage. If necessary, replace the water pump.

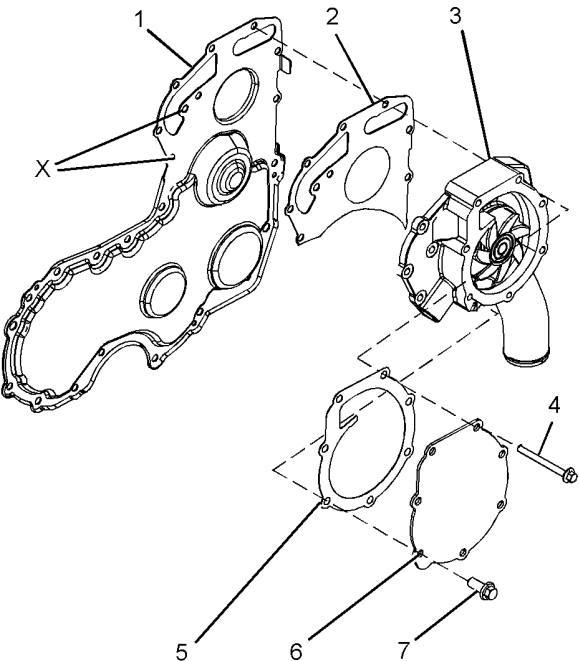


Illustration 106

g01269391

Typical example

2. If necessary, install cover (6) to water pump (3). Follow Step 2.a through Step 2.d in order to install the cover.

- a. Clean the gasket surface of cover (6).

- b. Position a new gasket (5) onto water pump (3).
- c. Install cover (6) to water pump (3).
- d. Install bolts (7) to cover (6). Tighten the bolts finger tight.

3. Clean the gasket surface of front cover (1).

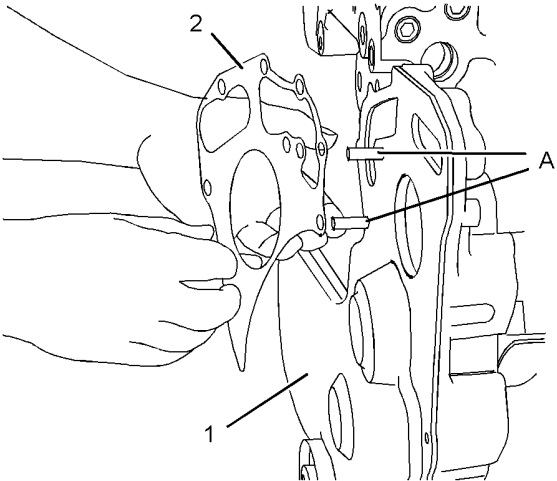


Illustration 107

g01269392

4. Install Tooling (A) in Position (X).
 5. Use Tooling (A) in order to align a new gasket (2) to front cover (1). Install the gasket to the front cover.
 6. Align water pump (3) with Tooling (A). Install the water pump to front cover (1).
- Note:** Ensure that the gear of the water pump and the gear of the fuel injection pump mesh.
7. Install bolts (4). Refer to Illustration 106. Tighten the bolts finger tight.
- Note:** Ensure that bolts of different lengths are installed in the correct positions.
8. Remove Tooling (A) and install remaining bolts (4) finger tight.

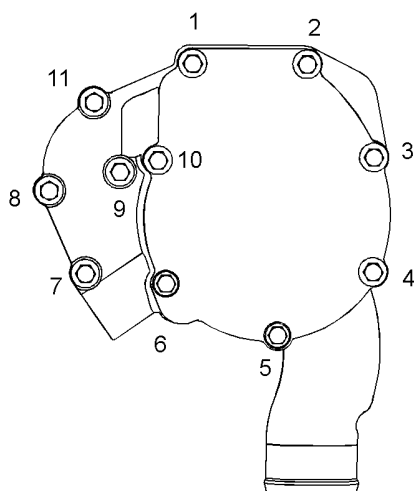


Illustration 108

g01269393

Tightening sequence for the water pump

9. Tighten bolts (4) and bolts (7) to a torque of 22 N·m (16 lb ft). Refer to Illustration 106. Tighten the bolts in the sequence that is shown in Illustration 108.
10. Install the hose to the water pump inlet. Tighten the hose clamps securely.
11. Fill the cooling system with coolant. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.

End By:

- a. Install the fan and the fan pulley. Refer to Disassembly and Assembly, "Fan - Remove and Install".

i02933682

Water Temperature Regulator - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Drain the coolant from the cooling system to a level below the water temperature regulator, into a suitable container for storage or for disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct draining procedure.

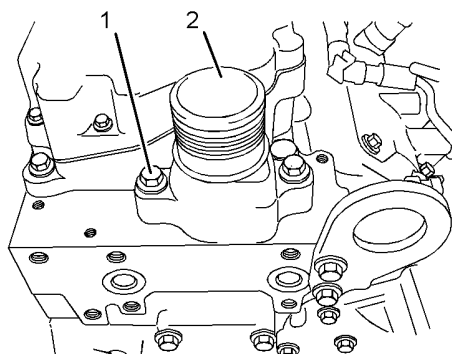


Illustration 109

g01269478

Typical example

2. Loosen the hose clamps from the upper radiator hose and disconnect the upper radiator hose from water temperature regulator housing (2).
3. Remove bolts (1) from water temperature regulator housing (2).
4. Remove water temperature regulator housing (2) from the cylinder head.

Note: Note the orientation of the water temperature regulator housing.

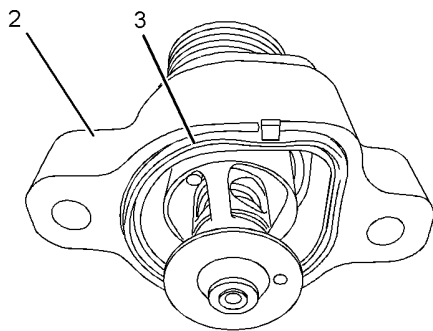


Illustration 110
Typical example

5. Remove O-ring seal (3) from water temperature regulator housing (2).

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

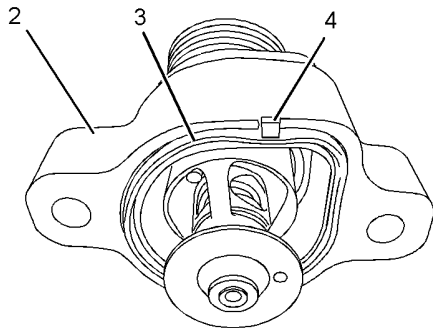


Illustration 111
Typical example

1. Ensure that all components of water temperature regulator housing (2) are clean and free of wear or damage. Check the water temperature regulator for correct operation. Refer to Systems Operation, Testing and Adjusting, "Water Temperature Regulator - Test" for the procedure to test the water temperature regulator. If any components of the water temperature regulator housing are worn or damaged, the complete assembly must be replaced.
2. If the original water temperature regulator housing is installed, position a new O-ring seal (3) into the groove in the water temperature regulator housing (2). Ensure that locating tab (4) is correctly seated in water temperature regulator housing (2).

A new water temperature regulator housing is supplied with a new O-ring seal.

3. Install water temperature regulator housing (2) to the cylinder head.

Note: Ensure the correct orientation of the water temperature regulator housing.

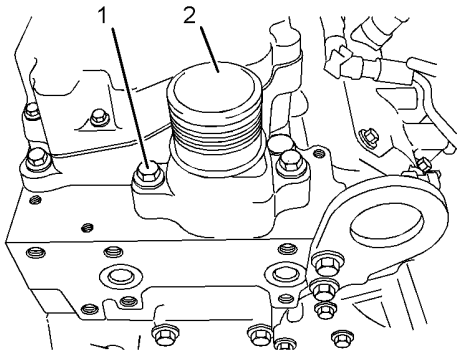


Illustration 112
Typical example

4. Install bolts (1). Tighten the bolts to a torque of 44 N·m (32 lb ft).
5. Connect the upper radiator hose and tighten the hose clamps securely.
6. Fill the cooling system to the correct level. Refer to Operation and Maintenance Manual, "Cooling System Coolant Level - Check" and Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct filling procedure.

i02933633

Flywheel - Remove

Removal Procedure

Table 28

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud 1/2 inch - 20 UNF by 4 inch	2

Start By:

- a. Remove the electric starting motor. Refer to Disassembly and Assembly, "Electric Starting Motor - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

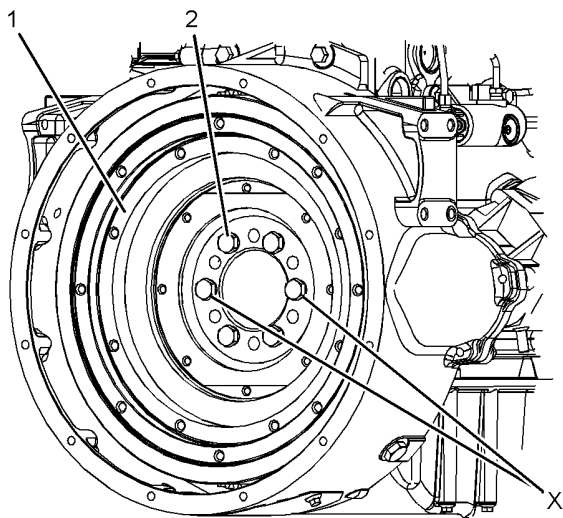


Illustration 113

g01245126

Typical example

1. Remove two bolts from Positions (X) on flywheel (1).
2. Install Tooling (A) to Positions (X) on flywheel (1).
3. Attach a suitable lifting device to flywheel (1). Support the weight of the flywheel. The weight of the flywheel is approximately 71 kg (155 lb).
4. Remove remaining bolts (2).
5. Use the lifting device in order to remove the flywheel from the engine.

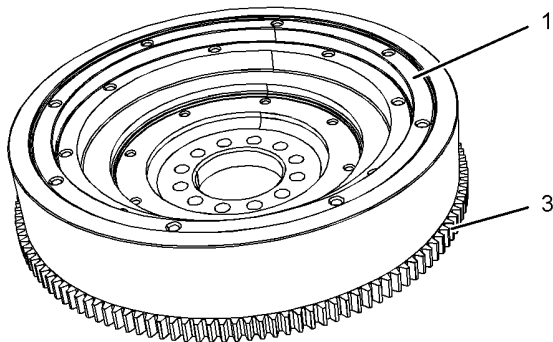


Illustration 114

g01245152

Typical example

6. Inspect flywheel (1) and ring gear (3) for wear or damage. Replace any components that are worn or damaged.

7. To remove the flywheel ring gear, follow Step 7.a and Step 7.b.

- a. Place the flywheel assembly on a suitable support.

Note: Identify the orientation of the teeth on the flywheel ring gear.

- b. Use a hammer and a punch in order to remove ring gear (3) from flywheel (1).

i02933632

Flywheel - Install

Installation Procedure

Table 29

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud 1/2 inch - 20 UNF by 4 inch	2

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

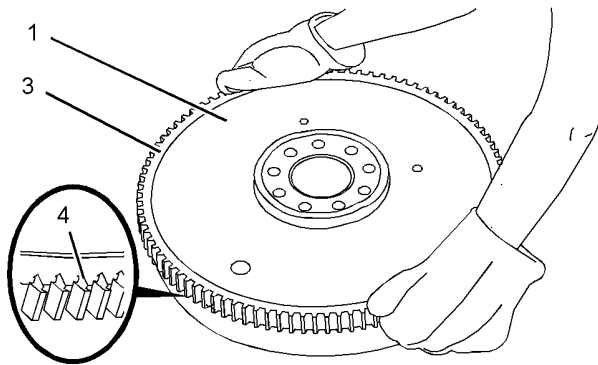


Illustration 115

g01470362

Typical example

WARNING

Always wear protective gloves when handling parts that have been heated.

1. If the flywheel ring gear was removed, follow Step 1.a through Step 1.c in order to install a new ring gear to the flywheel.

- a. Identify the orientation of teeth (4) on new ring gear (3).

Note: The chamfered side of the ring gear teeth must face toward the starting motor when the flywheel is installed. This will ensure the correct engagement of the starting motor.

- b. Heat flywheel ring gear (3) in an oven to a maximum temperature of 250 °C (482 °F) prior to installation.

Note: Do not use a torch to heat the ring gear.

- c. Ensure that the orientation of ring gear (3) is correct and quickly install the ring gear onto flywheel (1).

2. Inspect the crankshaft rear seal for leaks. If there are any oil leaks, replace the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Remove" and Disassembly and Assembly, "Crankshaft Rear Seal - Install" for the correct procedure.

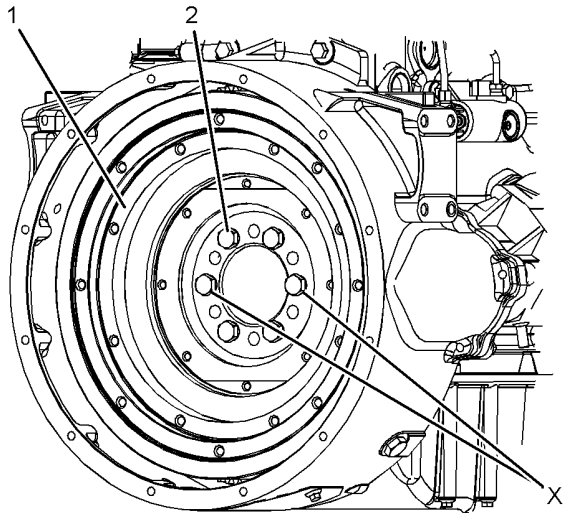


Illustration 116
Typical example

g01245126

3. Install a suitable lifting device to flywheel (1). The weight of the flywheel is approximately 71 kg (155 lb).

4. Install Tooling (A) to Positions (X) on the crankshaft.

5. Use the lifting device in order to position flywheel (1) onto Tooling (A).

6. Install bolts (2) to flywheel (1) finger tight.

7. Remove Tooling (A) and install remaining bolts (2) to flywheel (1).

8. Remove the lifting device from flywheel (1).

9. Use a suitable tool to prevent the flywheel from rotating. Tighten bolts (2) to a torque of 115 N·m (85 lb ft).

10. Check the run out of the flywheel. Refer to Specifications, "Flywheel" for further information.

End By:

- a. Install the electric starting motor. Refer to Disassembly and Assembly, "Electric Starting Motor - Remove and Install".

i02933610

Crankshaft Rear Seal - Remove

Removal Procedure

Table 30

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	E12 Torx Socket	1

Start By:

- a. Remove the flywheel. Refer to Disassembly and Assembly, "Flywheel - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: The crankshaft rear seal and the housing are manufactured as a one-piece assembly. The assembly is not serviceable. If the crankshaft rear seal is removed, the assembly must be replaced.

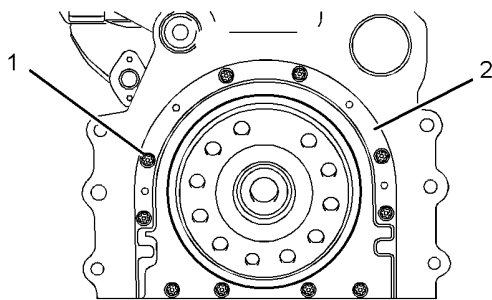


Illustration 117
Typical example

1. Use Tooling (A) in order to remove torx screws (1) from crankshaft rear seal (2).
2. Remove crankshaft rear seal (2) from the cylinder block. Discard the crankshaft rear seal.

i02933609

Crankshaft Rear Seal - Install

Installation Procedure

Table 31

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	E12 Torx Socket	1
B	27610306	Alignment Tool	1

Note: The crankshaft rear seal and the housing are manufactured as a one-piece assembly.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

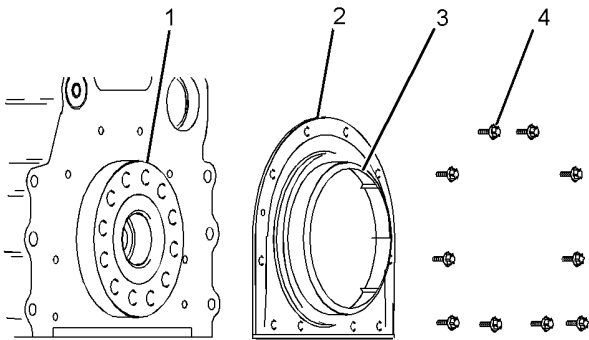


Illustration 118

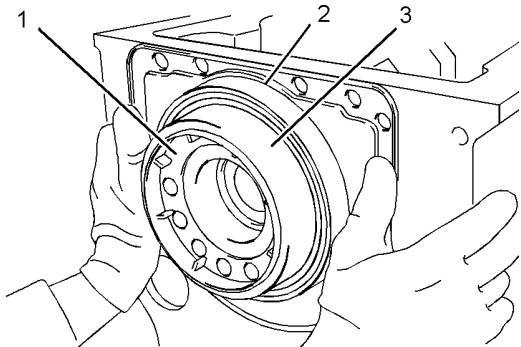


Illustration 119
Typical example

1. Ensure that crankshaft flange (1) is clean, dry and free from damage.
2. Ensure that the face of the cylinder block and the bridge piece are clean and dry.
3. A new crankshaft rear seal is supplied with a plastic sleeve (3). Ensure that the plastic sleeve is squarely installed within crankshaft rear seal (2).

Note: The plastic sleeve is included in order to protect the lip of the seal as the seal is pushed over the crankshaft flange.

Note: Do not lubricate the crankshaft rear seal or the crankshaft flange. The crankshaft rear seal must be installed dry.

4. Align plastic sleeve (3) with crankshaft flange (1). Ensure that the plastic sleeve is engaged onto the crankshaft flange. Push new crankshaft rear seal (2) squarely onto the crankshaft flange.

During this process, the plastic sleeve will be forced out of the crankshaft rear seal. Discard the plastic sleeve.

5. Align the two molded locators on crankshaft rear seal (2) with the holes in the cylinder block. Ensure that the crankshaft rear seal is seated against the cylinder block.

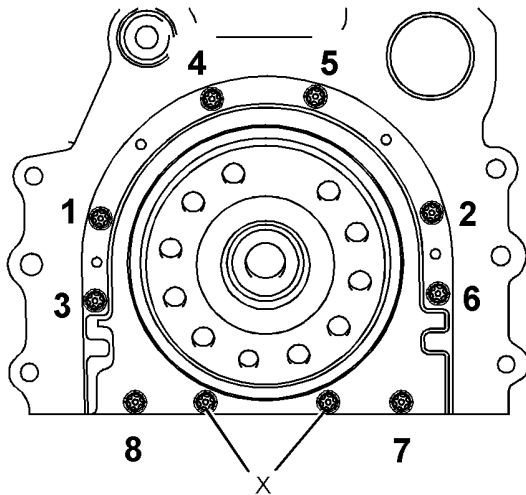


Illustration 120
Tightening sequence for the crankshaft rear seal

6. Install torx screws (4) finger tight.

Note: Do not install torx screws to Positions (X) at this stage.

7. Install Tooling (B) to crankshaft rear seal (2) and to crankshaft flange (1).
8. Use Tooling (A) in order to tighten torx screws (4) to a torque of 22 N·m (16 lb ft). Tighten torx screws (4) in the sequence that is shown in Illustration 120.
9. Remove Tooling (B).
10. Install remaining torx screws (4) to Positions (X). Use Tooling (A) in order to tighten the torx screws to a torque of 22 N·m (16 lb ft). Refer to Illustration 120.

End By:

- a. Install the flywheel. Refer to Disassembly and Assembly, "Flywheel - Install".

i02933634

Flywheel Housing - Remove and Install

Removal Procedure

Table 32

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Stud M10 by 100 mm	2

Start By:

- a. Remove the flywheel. Refer to Disassembly and Assembly, "Flywheel - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

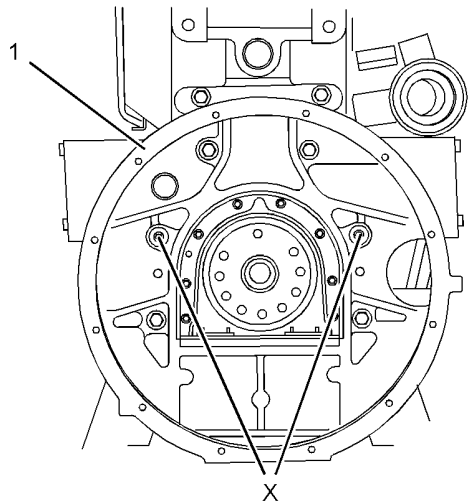


Illustration 121
Typical example

1. Remove the bolts from Position (X) from flywheel housing (1).
2. Install Tooling (A) into Position (X) on flywheel housing (1).
3. Install a suitable lifting device to the flywheel housing in order to support the flywheel housing. The flywheel housing weighs approximately 30 kg (66 lb).

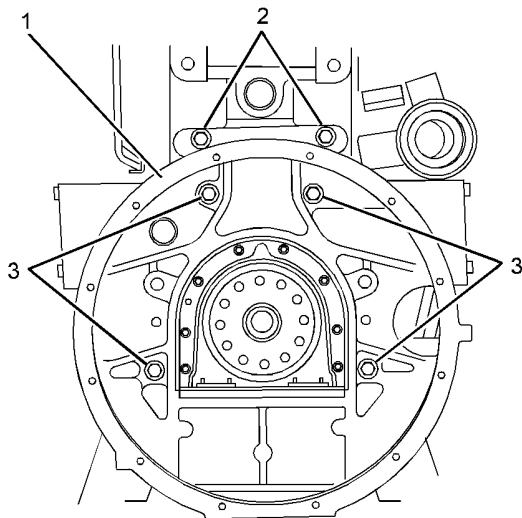


Illustration 122
Typical example

4. Remove bolts (2) and remaining bolts (3) from flywheel housing (1).
5. Use the lifting device in order to remove flywheel housing (1) from the cylinder block.

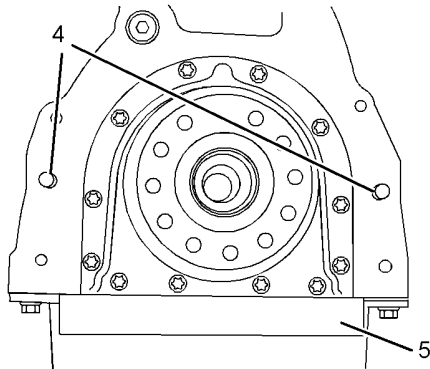


Illustration 123
Typical example

6. If the engine has an aluminum oil pan, remove dust seal (5).
7. If necessary, remove dowels (4) from the cylinder block.

Installation Procedure

Table 33

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Bolt M10 by 100 mm	2
B	21825617	Dial Indicator Group	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the flywheel housing is clean and free from damage. If necessary, replace the flywheel housing.

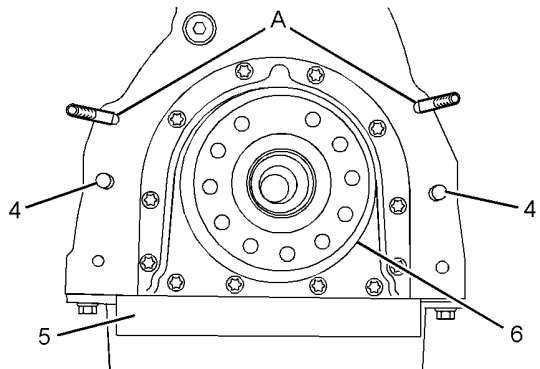


Illustration 124
Typical example

2. Inspect crankshaft rear seal (6) for leaks. If there are any oil leaks, replace the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Remove" and refer to Disassembly and Assembly, "Crankshaft Rear Seal - Install".
3. Clean the rear face of the cylinder block. If necessary, install dowels (4) to the cylinder block.
4. Install Tooling (A) to the cylinder block.
5. Install dust seal (5).

i02933607

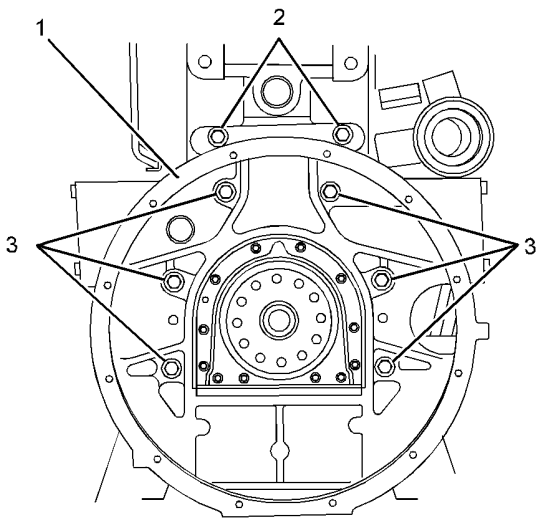


Illustration 125

g01763034

Typical example

6. Install a suitable lifting device to the flywheel housing. The flywheel housing weighs approximately 30 kg (66 lb).
7. Use the lifting device to align flywheel housing (1) with Tooling (A). Install the flywheel housing to the cylinder block.
8. Install bolts (2) and bolts (3) finger tight.
9. Remove Tooling (A). Install remaining bolts (3).
10. Tighten bolts (3) to a torque of 63 N·m (46 lb ft).
11. Tighten bolts (2) to a torque of 75 N·m (55 lb ft).
12. Use Tooling (B) to check the alignment of the flywheel housing with the crankshaft. Refer to Systems Operation, Testing and Adjusting, "Flywheel Housing - Inspect".

End By:

- a. Install the flywheel. Refer to Disassembly and Assembly, "Flywheel - Install".

Crankshaft Pulley - Remove and Install (Engines With an Automatic Belt Tensioner)

Removal Procedure

Start By:

- a. Remove the alternator belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

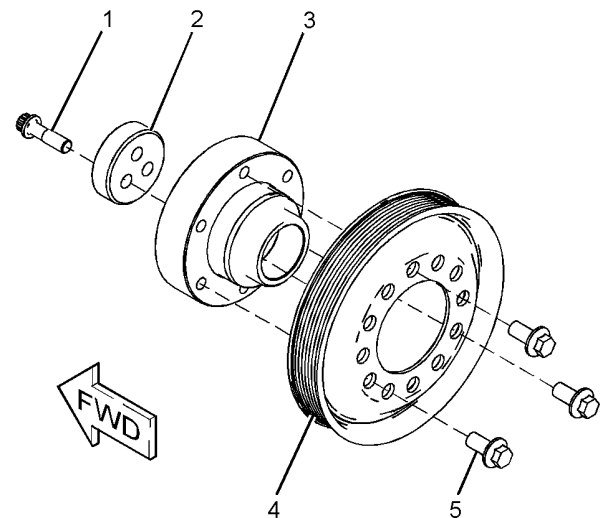


Illustration 126

g01249049

1. Use a suitable tool in order to prevent the crankshaft from rotating. Remove bolts (1).
2. Remove thrust block (2).
3. Carefully remove the assembly of the crankshaft pulley from the crankshaft.
4. Follow Step 4.a through Step 4.b in order to disassemble the crankshaft pulley.
 - a. Remove bolts (5).
 - b. Remove crankshaft pulley (4) from crankshaft adapter (3).

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the crankshaft adapter, the pulley and the thrust block are clean and free from damage. Replace any components that are damaged.

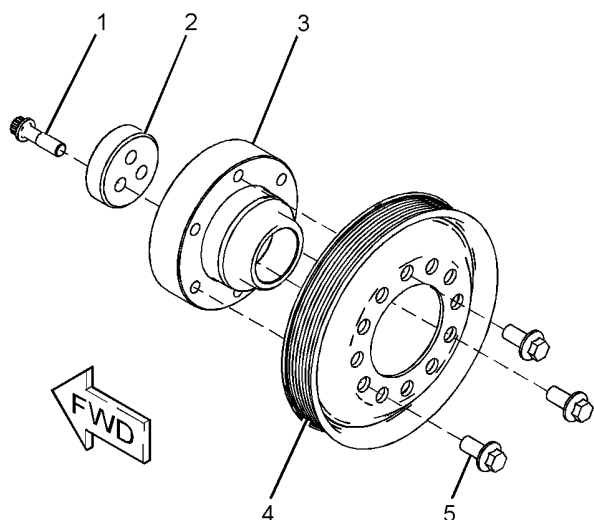


Illustration 127

g01249049

2. If necessary, follow Step 2.a through Step 2.b in order to assemble the crankshaft pulley.
 - a. Install crankshaft pulley (4) to crankshaft adapter (3).
 - b. Install bolts (5) to the assembly of the crankshaft pulley, and the crankshaft adapter. The bolts should be evenly spaced.
 - c. Tighten the bolts to a torque of 78 N·m (58 lb ft).
3. Ensure that the front of the crankshaft is clean and free from damage. Install the assembly of crankshaft pulley (3) to the crankshaft.

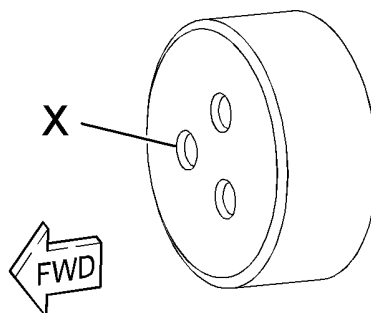


Illustration 128

g01471632

4. Align the holes in the thrust block with the holes in the crankshaft.

Note: Ensure chamfered Holes (X) in the thrust block. Face toward the front of the engine.

5. Install thrust block (2) to the assembly of the crankshaft pulley.
6. Install bolts (1) to thrust block (2).
7. Use a suitable tool in order to prevent the crankshaft from rotating. Tighten the bolts to a torque of 115 N·m (85 lb ft).
8. Repeat Step 7 in order to ensure correct torque.

End By:

- a. Install the alternator belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install".

i02933608

Crankshaft Pulley - Remove and Install (Engines Without an Automatic Belt Tensioner)

Removal Procedure

Start By:

- a. Remove the V-Belts. Refer to Disassembly and Assembly, "V-Belts - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

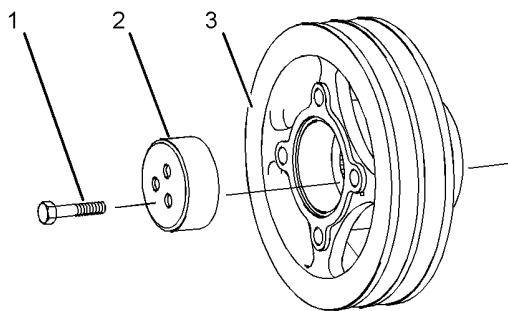


Illustration 129

g01255707

1. Use a suitable tool in order to prevent the crankshaft from rotating. Remove bolts (1).
2. Remove thrust block (2).
3. Carefully remove crankshaft pulley (3) from the crankshaft.

Installation Procedure

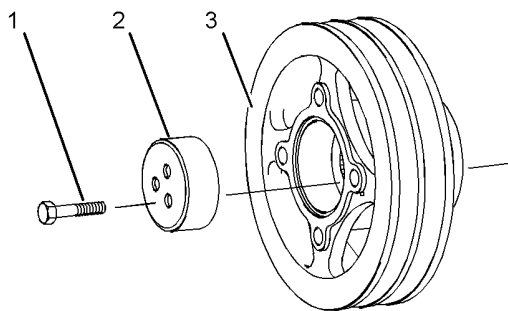


Illustration 130

g01255707

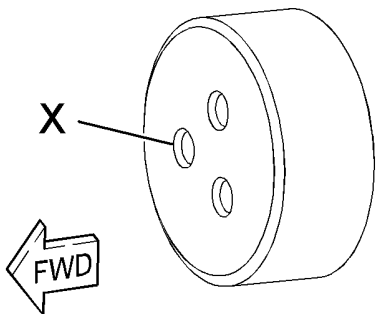


Illustration 131

g01471632

1. Ensure that the crankshaft pulley and the thrust block are clean and free from damage. Replace any components that are damaged.
 2. Ensure that the front of the crankshaft is clean and free from damage. Install crankshaft pulley (3) to the crankshaft.
 3. Align the holes in the thrust block with the holes in the crankshaft.
- Note:** Ensure that chamfered Holes (X) in the thrust block face toward the front of the engine.
4. Install thrust block (2) to the crankshaft pulley.
 5. Install bolts (1) to thrust block (2).
 6. Use a suitable tool in order to prevent the crankshaft from rotating. Tighten the bolts to a torque of 115 N·m (85 lb ft).
 7. Repeat Step 6 in order to ensure correct torque.

End By:

- a. Install the V-Belts. Refer to Disassembly and Assembly, "V-Belts - Remove and Install".

i02933603

**Crankshaft Front Seal -
Remove and Install**

Removal Procedure

Table 34

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610230	Puller	1

Start By:

- a. Remove the crankshaft pulley. Refer to Disassembly and Assembly, "Crankshaft Pulley - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

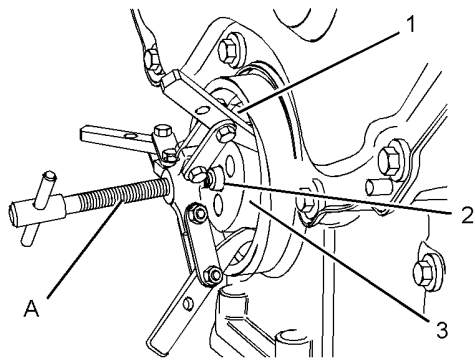


Illustration 132

g01266942

1. Install the legs of Tooling (A) behind crankshaft front seal (1). Install a suitable spacer (2) between Tooling (A) and crankshaft (3). Use Tooling (A) in order to pull the crankshaft front seal out of the front housing.

Note: Do not damage the bore for the crankshaft front seal in the front housing.

Installation Procedure

Table 35

Required Tools			
Tool	Part Number	Part Description	Qty
B	21825577	Threaded Bar	1
	21825580	Anchor Plate	1
	21825579	Sleeve	1
	21825578	Pressure Plate	1
	21825581	Adapter	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the bore for the crankshaft front seal in the front housing is clean and free from damage.

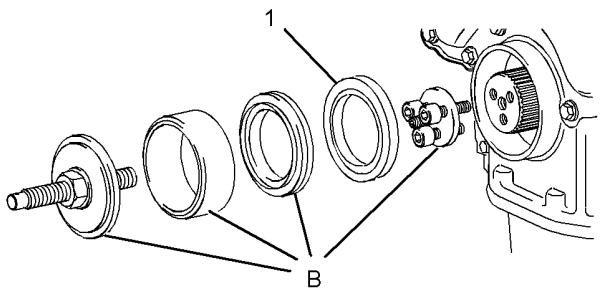


Illustration 133

g01266453

Typical example

2. Assemble Tooling (B).
3. Align a new crankshaft front seal (1) to the front housing.
4. Use Tooling (B) to install crankshaft front seal (1). Ensure that the front face of the seal is installed to a depth of 9 ± 0.2 mm (0.354 ± 0.008 inch) into the front housing.
5. Remove Tooling (B) from the crankshaft.

End By:

- a. Install the crankshaft pulley. Refer to Disassembly and Assembly, "Crankshaft Pulley - Remove and Install".

i02933635

Front Cover - Remove and Install

Removal Procedure

Start By:

- a. If the engine is equipped with a fan, remove the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".
- b. Remove the water pump. Refer to Disassembly and Assembly, "Water Pump - Remove".

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: In order to remove the front cover, it is not necessary to remove the crankshaft pulley or the alternator.

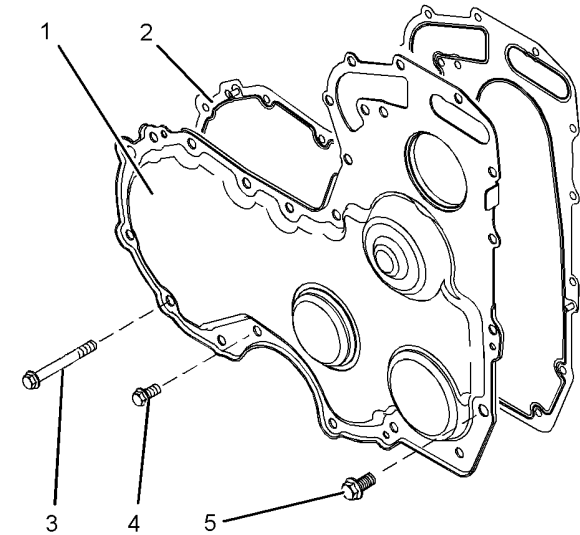


Illustration 134
Typical example

g01258462

1. Remove bolts (3), (4) and (5). Identify the positions of the different bolts.
2. Remove front cover (1) from the front housing.
3. Remove gasket (2) from front cover (1).

Installation Procedure

Table 36

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Bolt M8 by 80 mm	2

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

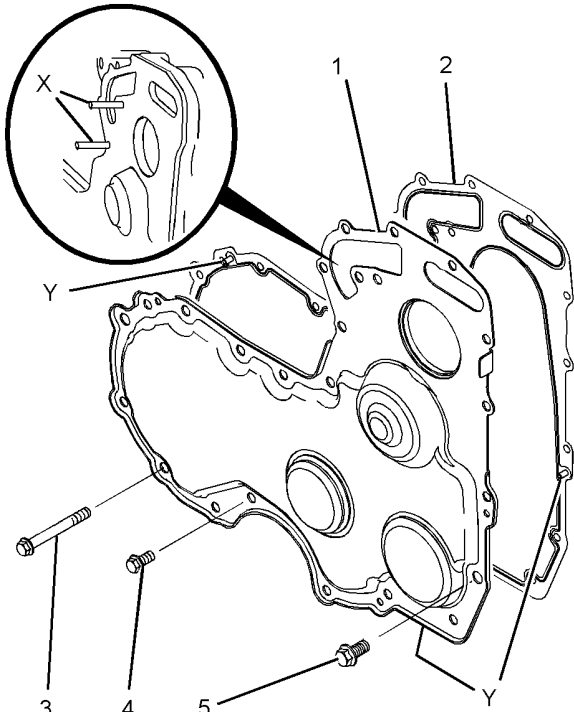


Illustration 135
Typical example

g01471654

1. Thoroughly clean the gasket surface of the front housing.
2. If the original front cover is installed, follow Step 2.a and Step 2.b in order to install the gasket.
 - a. Thoroughly clean the gasket surface of the front cover.
 - b. Install a new gasket (2) to front cover (1). Engage Locators (Y) into the holes in the front cover.
3. Install Tooling (A) into Holes (X) in the front housing.

4. Use Tooling (A) in order to position the front cover assembly onto the front housing.
5. Install bolts (3), (4) and (5) finger tight. Ensure that the different bolts are installed in the correct positions.
6. Loosely install the water pump assembly and remove Tooling (A). Refer to Disassembly and Assembly, "Water Pump - Install" for the correct procedure.
7. Tighten bolts (3), (4) and (5) to a torque of 22 N·m (16 lb ft).
8. Tighten the bolts for the water pump to a torque of 22 N·m (16 lb ft).

End By:

- a. If the engine is equipped with a fan, install the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".

- c. If the engine is equipped with an accessory drive, remove the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- d. Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".
- e. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Gear Group (Front) - Remove and Install

i02933652

Removal Procedure

Table 37

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1

⁽¹⁾ The Crankshaft Turning Tool is used on the front pulley.

⁽²⁾ This Tool is used in the aperture for the electric starting motor.

Start By:

- a. If the engine is equipped with an air compressor, remove the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- b. If the engine is equipped with a vacuum pump, remove the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".

Note: Care must be taken in order to ensure that the fuel injection pump timing is not lost during the removal of the front gear group. Carefully follow the procedure in order to remove the gear group.

1. Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".

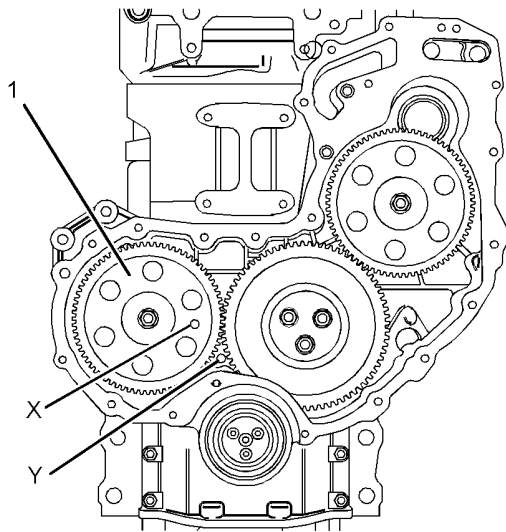


Illustration 136
Typical example

2. Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing. Use Tooling (B) in order to lock the camshaft in the correct position. Install Tooling (C) into Hole (Y) in the front housing. Use Tooling (C) in order to lock the crankshaft in the correct position.

Note: Do not use excessive force to install Tooling (C). Do not use Tooling (C) to hold the crankshaft during repairs.

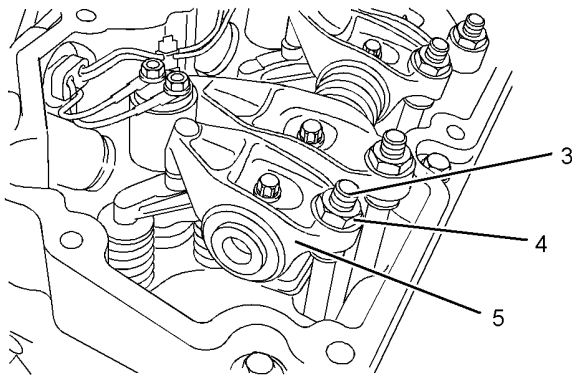


Illustration 137
Typical example

3. Loosen nuts (4) on all rocker arms (5). Unscrew adjusters (3) on all rocker arms (5) until all valves are fully closed.

Note: Failure to ensure that ALL adjusters are fully unscrewed can result in contact between the valves and pistons.

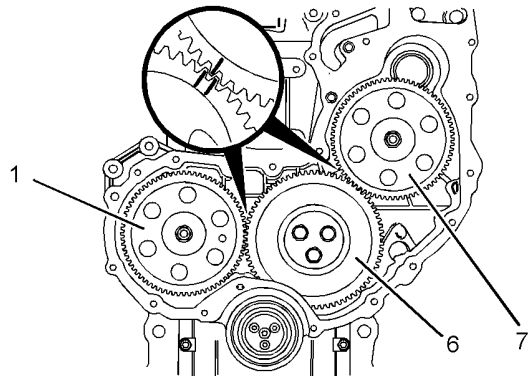


Illustration 138
Typical example

4. Apply sufficient pressure to fuel injection pump gear (7) in a counterclockwise direction in order to remove the backlash. Lock the fuel injection pump in this position. Refer to Disassembly and Assembly, "Fuel Pump Gear - Remove" for the correct procedure.

5. Mark gears (1), (6) and (7) in order to show alignment. Refer to Illustration 138.

Note: Identification will ensure that the gears can be installed in the original alignment.

6. Remove fuel pump gear (7). Refer to Disassembly and Assembly, "Fuel Pump Gear - Remove" for the correct procedure.

7. Remove camshaft gear (1). Refer to Disassembly and Assembly, "Camshaft Gear - Remove and Install".

8. Remove idler gear (6). Refer to Disassembly and Assembly, "Idler Gear - Remove".

Installation Procedure

Table 38

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610212	Camshaft Timing Pin	1
C	27610286	Crankshaft Timing Pin	1
D	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The fuel injection pump must remain locked until the procedure instructs you to unlock the fuel injection pump.

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

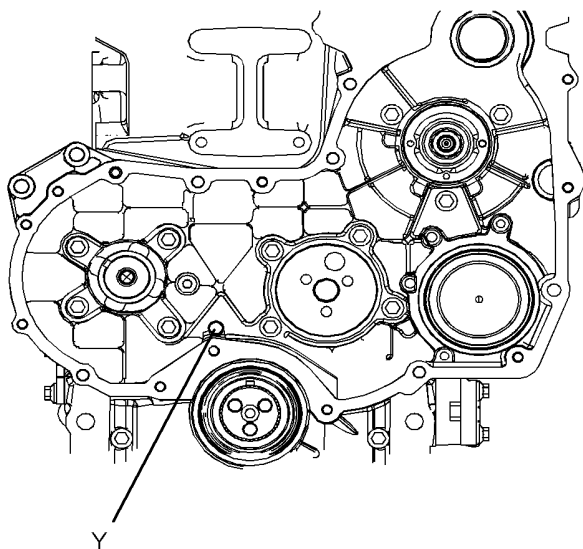


Illustration 139

g01488044

Typical example

2. If necessary, install Tooling (C) into Hole (Y) in the front housing. Use Tooling (C) in order to lock the crankshaft in the correct position.

Note: Do not use excessive force to install Tooling (C). Do not use Tooling (C) to hold the crankshaft during repairs.

3. Ensure that all of the components of the front gear group are clean and free from wear or damage. If necessary, replace any components that are worn or damaged.

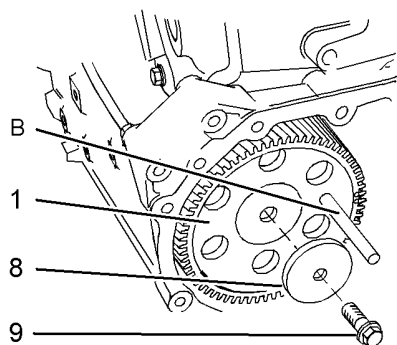


Illustration 140

g01471735

Typical example

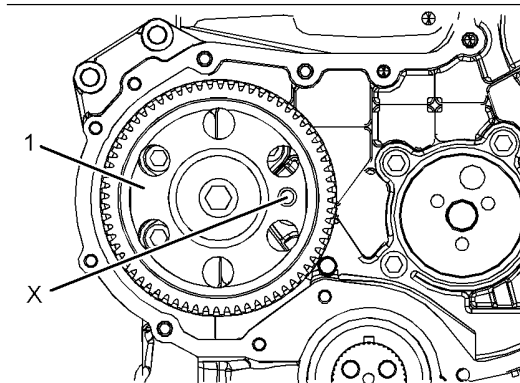


Illustration 141

g01488055

Typical example

4. Install camshaft gear (1). Loosely install bolt (9) and washer (8). Refer to Disassembly and Assembly, "Camshaft Gear - Remove and Install" for more information.
5. Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing.

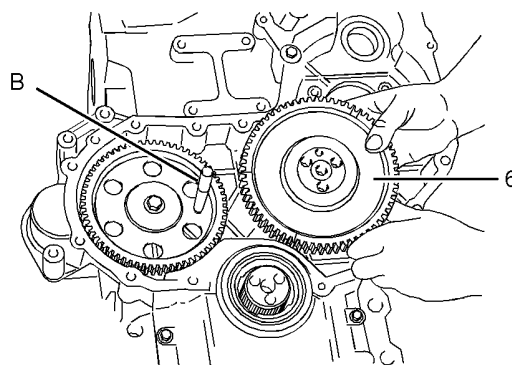


Illustration 142

g01471736

Typical example

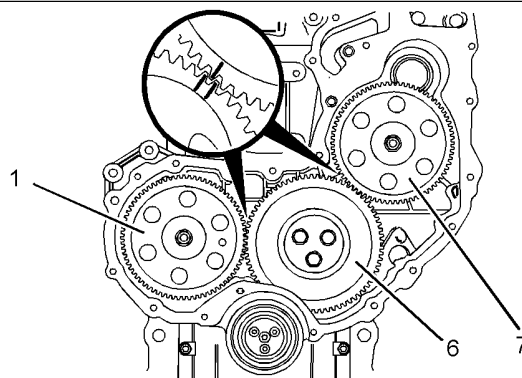


Illustration 143

g01471718

Alignment of timing marks

6. Install idler gear (6). Ensure that the timing marks on gears (1) and (6) are in alignment and that the mesh of the gears is correct. Refer to Disassembly and Assembly, "Idler Gear - Install". Check the end play of the idler gear. Refer to Specifications, "Gear Group (Front)" and refer to Disassembly and Assembly, "Idler Gear - Install" for further information.

7. Remove Tooling (B) and Tooling (C). Tighten bolt (9) for the camshaft gear to a torque of 95 N·m (70 lb ft). Check the end play of the camshaft gear. Refer to Specifications, "Camshaft" for more information.

Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing and install Tooling (C) into Hole (Y) in the front housing.

8. Ensure that the fuel injection pump is locked in the correct position. Refer to Disassembly and Assembly, "Fuel Injection Pump - Install".

9. Install fuel injection pump gear (7). Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Install" for the correct procedure. Ensure that timing marks on gear (6) and gear (7) are in alignment. See Illustration 143. Ensure that the mesh of the gears is correct.

10. Remove Tooling (B) and Tooling (C).

11. Use Tooling (D) in order to measure the backlash for gears (1), (6) and (7). Ensure that the backlash for the gears is within specified values. Refer to Specifications, "Gear Group (Front)" for further information.

12. Lubricate each gear with clean engine oil.

13. Adjust the engine valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

End By:

- a. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".
- b. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".
- c. If the engine is equipped with an air compressor, install the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- d. If the engine is equipped with a vacuum pump, install the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".

- e. If the engine is equipped with an accessory drive, install the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".

i03496189

Idler Gear - Remove

Removal Procedure (Early Heavy-Duty Idler Gear)

Table 39

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1

Start By:

- a. If the engine is equipped with an air compressor, remove the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- b. If the engine is equipped with a vacuum pump, remove the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- c. If the engine is equipped with an accessory drive, remove the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- d. Remove the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Remove".
- e. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Note: Care must be taken in order to ensure that the fuel injection pump timing is not lost during the removal of the fuel pump gear. Carefully follow the procedure in order to remove the fuel pump gear.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The assembly of heavy-duty idler gear is not serviceable. Do not disassemble the heavy-duty idler gear.

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to the Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

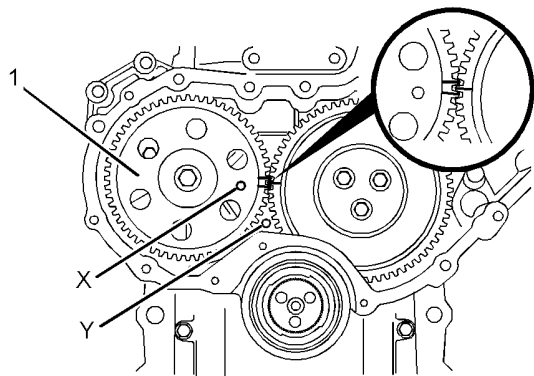


Illustration 144
Alignment of timing marks

2. Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.

Note: Ensure that the gears are marked in order to show alignment.

3. Ensure that Tooling (B) is installed in Hole (Y) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

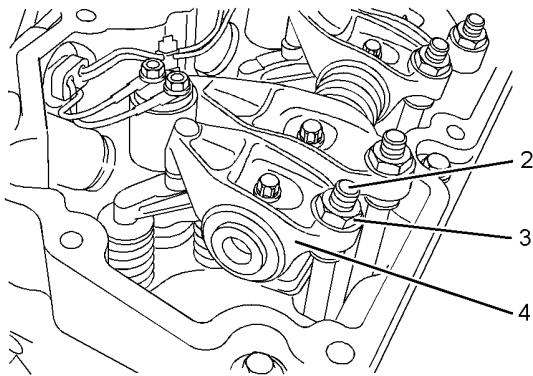


Illustration 145
Typical example

4. Loosen nuts (3) on all rocker arms (4). Unscrew adjusters (2) on all rocker arms (4) until all valves are fully closed.

Note: Failure to ensure that ALL adjusters are fully unscrewed can result in contact between the valves and pistons.

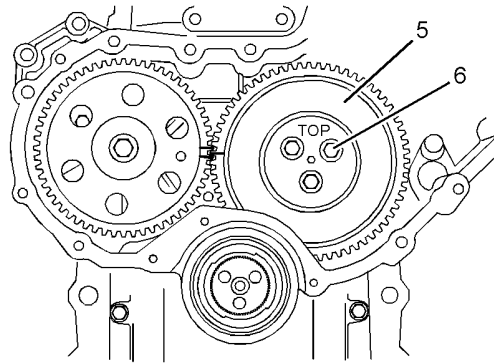


Illustration 146
Typical example

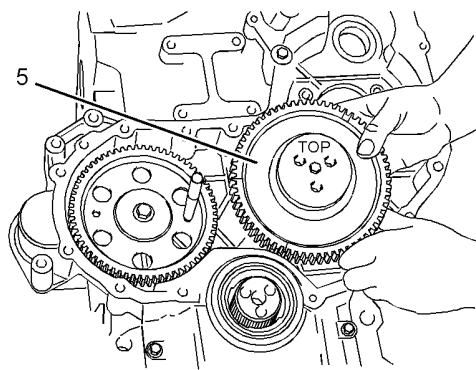


Illustration 147
Typical example

5. Remove bolts (6) from the assembly of heavy-duty idler gear (5).

6. Remove the assembly of idler gear (5) from the recess in the front housing.

Note: The idler gear must be tilted during removal.

i03496187

Idler Gear - Remove

Removal Procedure (Standard Idler Gear)

Table 40

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1

Start By:

- a. If the engine is equipped with an air compressor, remove the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- b. If the engine is equipped with a vacuum pump, remove the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- c. If the engine is equipped with an accessory drive, remove the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- d. Remove the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Remove".
- e. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Note: Care must be taken in order to ensure that the fuel injection pump timing is not lost during the removal of the fuel pump gear. Carefully follow the procedure in order to remove the fuel pump gear.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

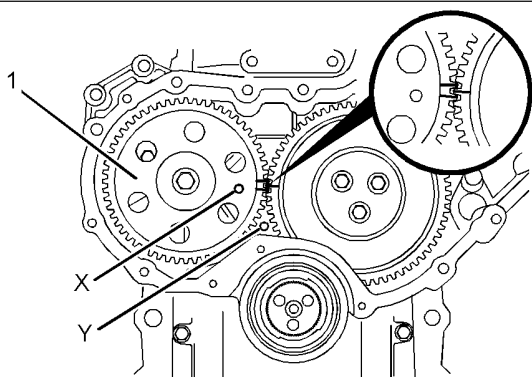


Illustration 148
Alignment of timing marks

2. Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.

Note: Ensure that the gears are marked in order to show alignment.

3. Ensure that Tooling (B) is installed in Hole (Y) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

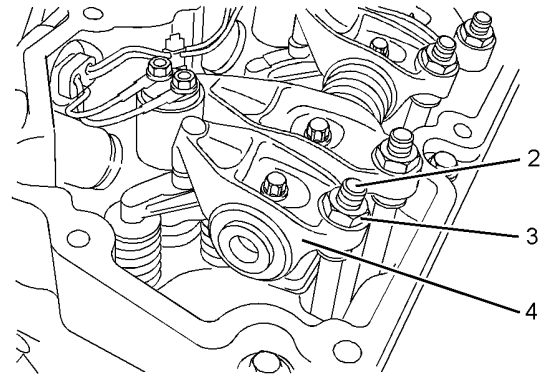


Illustration 149
Typical example

4. Loosen nuts (3) on all rocker arms (4). Unscrew adjusters (2) on all rocker arms (4) until all valves are fully closed.

Note: Failure to ensure that ALL adjusters are fully unscrewed can result in contact between the valves and pistons.

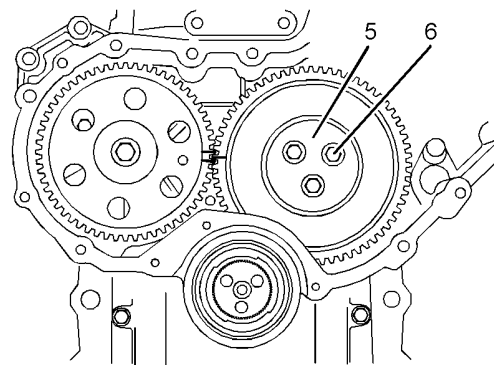


Illustration 150
Typical example

5. Mark plate (5) in order to show orientation.

Note: Identification will ensure that the plate can be installed in the original orientation.

6. Remove bolts (6).

7. Remove plate (5).

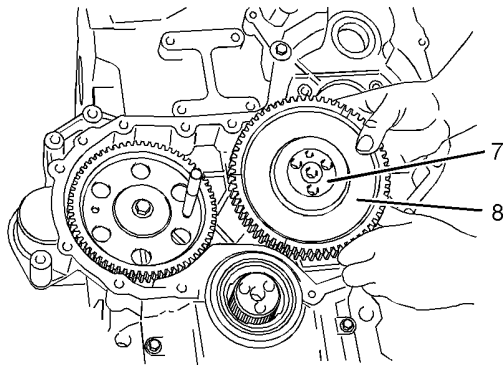


Illustration 151
Typical example

8. Remove the assembly of idler gear (8) and hub (7) from the recess in the front housing.

Note: The idler gear must be tilted during removal.

9. Remove hub (7) from idler gear (8).

i02933658

Idler Gear - Remove

Removal Procedure (Latest Heavy-Duty Idler Gear)

Table 41

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1
C	-	Bolt M8x80mm	1

Start By:

- If the engine is equipped with an air compressor, remove the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- If the engine is equipped with a vacuum pump, remove the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- If the engine is equipped with an accessory drive, remove the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".

- Remove the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Remove".
- Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Note: Care must be taken in order to ensure that the fuel injection pump timing is not lost during the removal of the fuel pump gear. Carefully follow the procedure in order to remove the fuel pump gear.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The assembly of heavy-duty idler gear is not serviceable. Do not disassemble the heavy-duty idler gear.

- Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

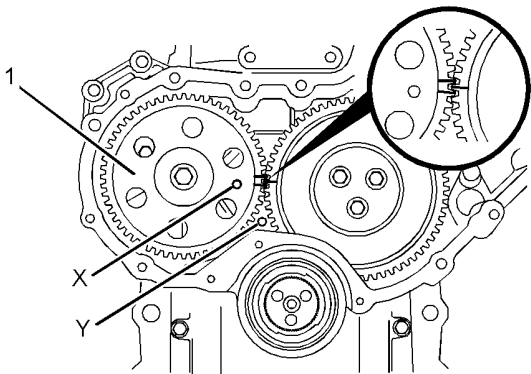


Illustration 152
Alignment of timing marks

- Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.

Note: Ensure that the gears are marked in order to show alignment.

- Ensure that Tooling (B) is installed in Hole (Y) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct Position.

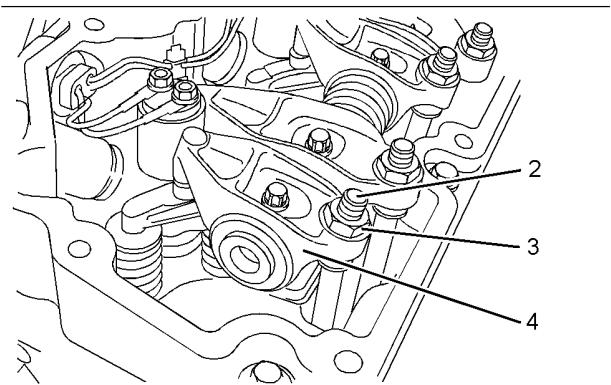


Illustration 153
Typical example

4. Loosen nuts (3) on all rocker arms (4). Unscrew adjusters (2) on all rocker arms (4) until all valves are fully closed.

Note: Failure to ensure that ALL adjusters are fully unscrewed can result in contact between the valves and pistons.

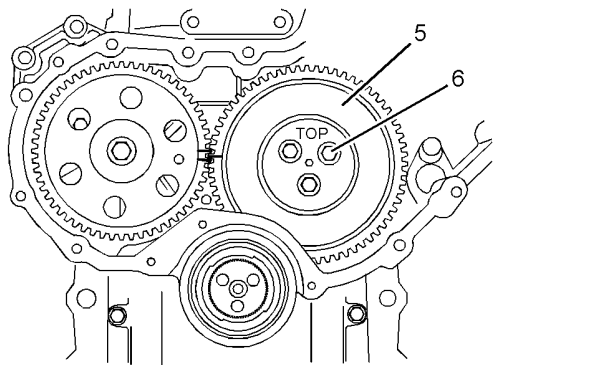


Illustration 154
Typical example

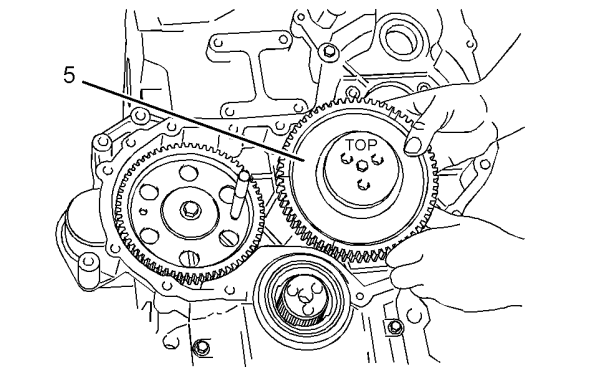


Illustration 155
Typical example

5. Remove bolts (6) from the assembly of heavy-duty idler gear (5).

6. Remove the assembly of idler gear (5) from the recess in the front housing.

Note: The idler gear must be tilted during removal.

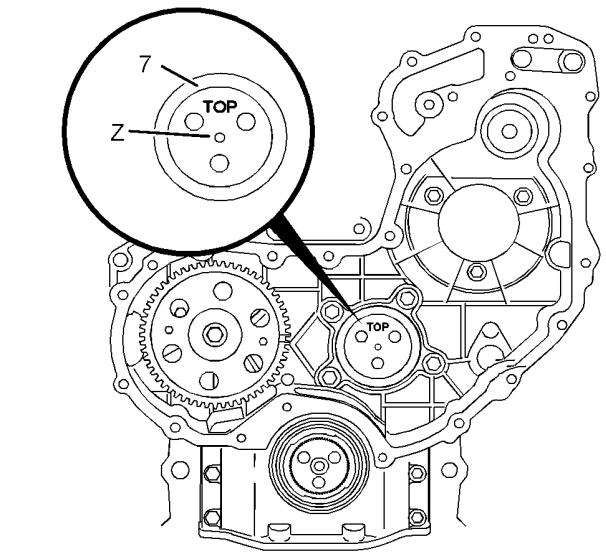


Illustration 156
Typical example

7. If necessary, remove plate (7). Install Tooling (C) into threaded Hole (Z) in order to remove plate (7).

i03496182

Idler Gear - Install

Installation Procedure (Heavy-Duty Idler Gear)

Table 42

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1
C	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

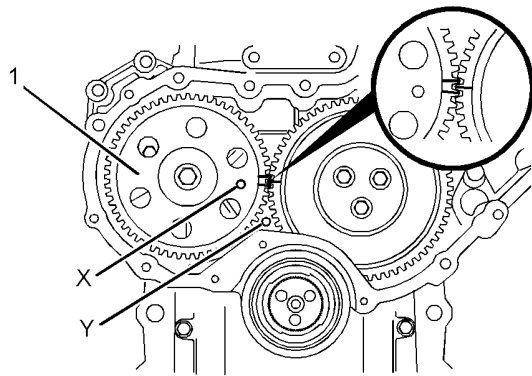


Illustration 157
Alignment of timing marks

2. Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.
3. Ensure that Tooling (B) is installed in Hole (Y) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

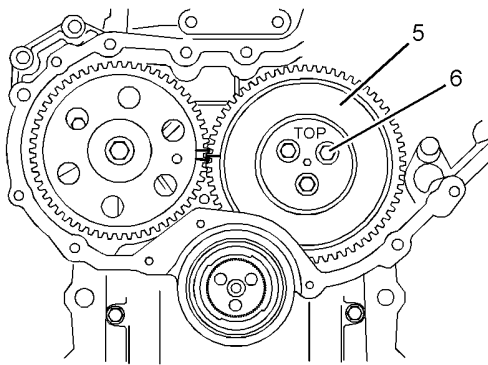


Illustration 158
Typical example

4. Clean the assembly of idler gear (5) and inspect the assembly of the idler gear for wear or damage. Refer to Specifications, "Gear Group (Front)" for more information. If necessary, replace the assembly of the idler gear.
5. Lubricate the bearings in the assembly of idler gear (5) with clean engine oil.

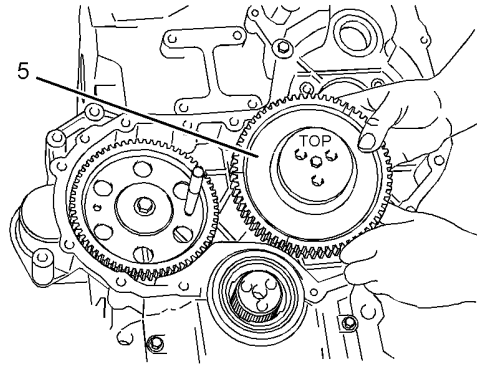


Illustration 159
Typical example

6. Align the timing mark on idler gear (5) with the timing mark on the camshaft gear. Refer to Illustration 157. Install the assembly of idler gear (5) into the recess in the timing case. Ensure that the identification mark TOP is upward.

Note: The idler gear must be tilted during installation. Ensure that the holes in assembly of the idler gear are aligned with the holes in the cylinder block.

7. Install bolts (6). Tighten bolts (6) to a torque of 44 N·m (32 lb ft).

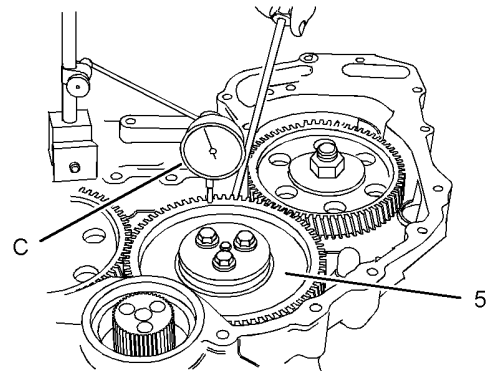


Illustration 160
Checking end play by using a dial indicator group

8. Use Tooling (C) in order to check the end play of the idler gear. Refer to Specifications, "Gear Group (Front)" for more information.
9. Use Tooling (C) in order to check the backlash between the idler gear and the camshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.
10. Use Tooling (C) in order to check the backlash between the idler gear and the crankshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.

11. Lightly lubricate all of the gears with clean engine oil.
12. Adjust the engine valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

End By:

- a. Install the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Install".
- b. If the engine is equipped with an air compressor, install the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- c. If the engine is equipped with a vacuum pump, install the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- d. If the engine is equipped with an accessory drive, install the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- e. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

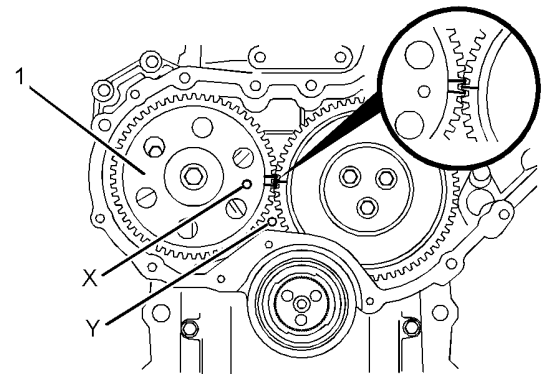


Illustration 161

g01473492

Alignment of timing marks

2. Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.
3. Ensure that Tooling (B) is installed in Hole (Y) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

i03496180

Idler Gear - Install

Installation Procedure (Standard Idler Gear)

Table 43

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1
C	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

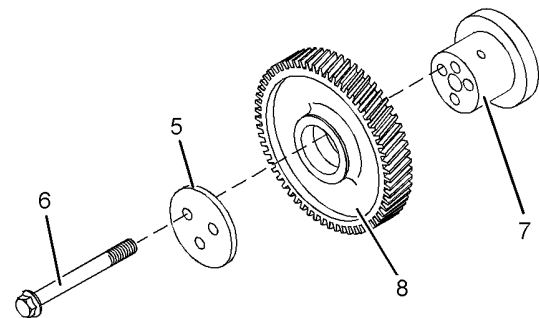


Illustration 162

g01832693

Typical example

4. Clean idler gear (8) and inspect the idler gear for wear or damage. Refer to Specifications, "Gear Group (Front)" for more information. If necessary, replace the idler gear.
5. Clean hub (7) and inspect the hub for wear or damage. Refer to Specifications, "Gear Group (Front)" for more information. If necessary, replace the hub.
6. Lubricate hub (7) with clean engine oil. Slide the hub into idler gear (8). Ensure that the timing marks are toward the front of the idler gear.

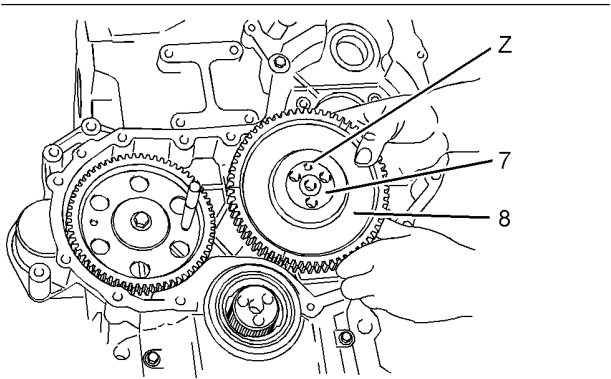


Illustration 163
Typical example

7. Align the timing mark on idler gear (8) with the timing mark on the camshaft gear. Refer to the Illustration 161. Install the assembly of idler gear (8) and hub (7) into the recess in the timing case. Ensure that oil Hole (Z) is to the top of the hub.

Note: The idler gear must be tilted during installation. Ensure that the holes in the hub are aligned with the holes in the cylinder block.

8. Clean plate (5) and inspect the plate for wear or damage. If necessary, replace the plate.
9. Lubricate plate (5) with clean engine oil. A used plate should be installed in the original orientation. If a new plate is installed, ensure that the holes in plate (5) are aligned with the holes in hub (7). Install plate (5) to hub (7).
10. Install bolts (6). Tighten the bolts to a torque of 44 N·m (32 lb ft).

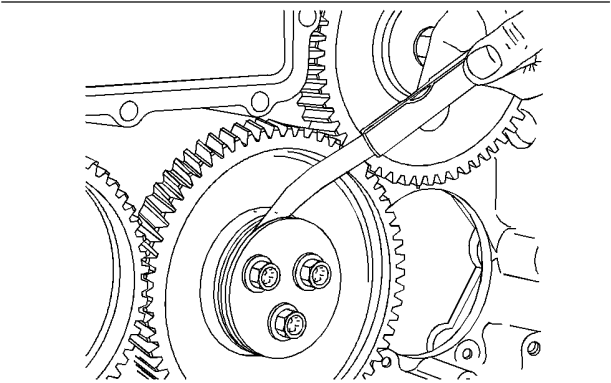


Illustration 164
Checking end play by using a set of feeler gauge's

11. Use a set of feeler gauge's in order to check the end play of the idler gear. Refer to Specifications, "Gear Group (Front)" for more information.

12. Use Tooling (C) in order to check the backlash between the idler gear and the camshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.
13. Use Tooling (C) in order to check the backlash between the idler gear and the crankshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.
14. Lightly lubricate all of the gears with clean engine oil.
15. Adjust the engine valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

End By:

- a. Install the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Install".
- b. If the engine is equipped with an air compressor, install the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- c. If the engine is equipped with a vacuum pump, install the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- d. If the engine is equipped with an accessory drive, install the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- e. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

i02933657

Idler Gear - Install

Installation Procedure (Latest Heavy-Duty Idler Gear)

Table 44

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610212	Camshaft Timing Pin	1
B	27610211	Crankshaft Timing Pin	1
D	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that number one piston is at the top center Position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

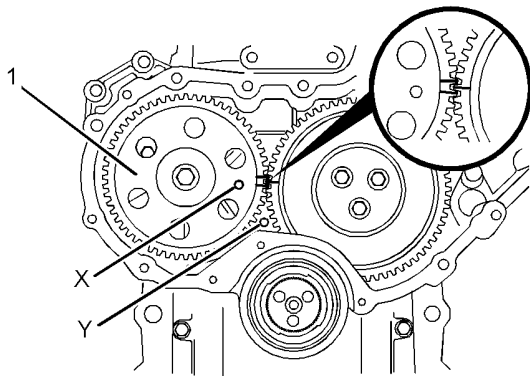


Illustration 165

g01473492

Alignment of timing marks

2. Ensure that Tooling (A) is installed into Hole (X) in camshaft gear (1). Use Tooling (A) in order to lock the camshaft in the correct position.
3. Ensure that Tooling (B) is installed in Hole (Y) in the cylinder block. Use Tooling (B) in order to lock the crankshaft in the correct position.

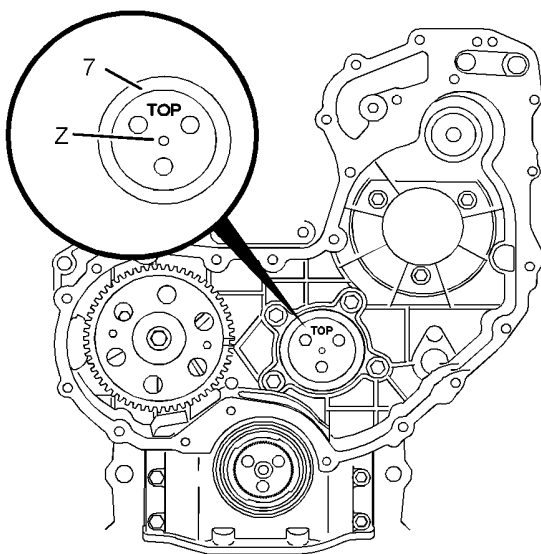


Illustration 166

g01831473

Typical example

4. Install plate (2) into the recess in the front housing.

Note: Ensure that the identification mark TOP is upward.

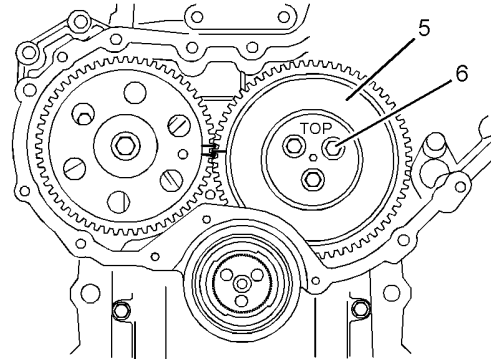


Illustration 167

g01832735

Typical example

5. Clean the assembly of idler gear (5) and inspect the assembly of the idler gear for wear or damage. Refer to Specifications, "Gear Group (Front)" for more information. If necessary, replace the assembly of the idler gear.
6. Lubricate the bearings in the assembly of idler gear (5) with clean engine oil.

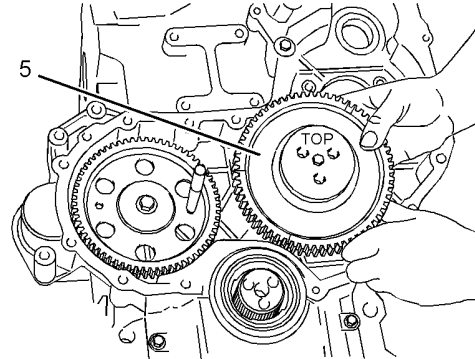


Illustration 168

g01831467

Typical example

7. Align the timing mark on idler gear (5) with the timing mark on the camshaft gear. Refer to Illustration 165. Install the assembly of idler gear (5) into the recess in the timing case. Ensure that the identification mark TOP is upward.

Note: The idler gear must be tilted during installation. Ensure that the holes in the assembly of the idler gear are aligned with the holes in the cylinder block.

8. Install bolts (6). Tighten the bolts to a torque of 44 N·m (32 lb ft).

i02933656

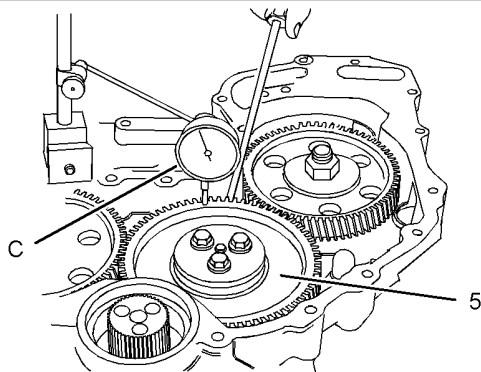


Illustration 169

g01832813

Checking end play by using a dial indicator group

9. Use Tooling (D) in order to check the end play of idler gear (5). Refer to Specifications, "Gear Group (Front)" for more information.
10. Use Tooling (D) in order to check the backlash between the idler gear and the camshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.
11. Use Tooling (D) in order to check the backlash between the idler gear and the crankshaft gear. Refer to Specifications, "Gear Group (Front)" for more information.
12. Lightly lubricate all of the gears with clean engine oil.
13. Adjust the engine valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

End By:

- a. Install the fuel injection pump gear. Refer to Disassembly and Assembly, "Fuel Injection Pump Gear - Install".
- b. If the engine is equipped with an air compressor, install the air compressor. Refer to Disassembly and Assembly, "Air Compressor - Remove and Install".
- c. If the engine is equipped with a vacuum pump, install the vacuum pump. Refer to Disassembly and Assembly, "Vacuum Pump - Remove and Install".
- d. If the engine is equipped with an accessory drive, install the accessory drive. Refer to Disassembly and Assembly, "Accessory Drive - Remove and Install".
- e. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

Housing (Front) - Remove

Removal Procedure

Start By:

- a. Remove the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".
- b. Remove the alternator. Refer to Disassembly and Assembly, "Alternator - Remove".
- c. Remove the crankshaft pulley. Refer to Disassembly and Assembly, "Crankshaft Pulley - Remove and Install".
- d. Remove the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
- e. Remove the timing gears. Refer to Disassembly and Assembly, "Gear Group (Front) - Remove and Install".
- f. Remove the fuel injection pump. Refer to Disassembly and Assembly, "Fuel Injection Pump - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Ensure that the coolant is drained into a suitable container for storage or disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.

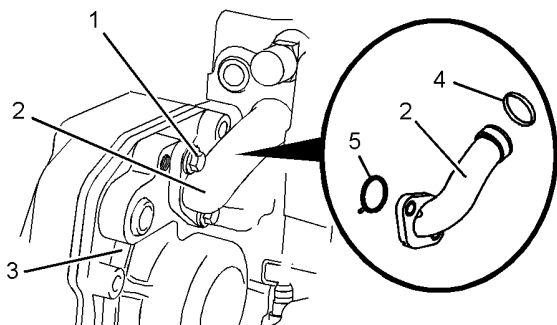


Illustration 170

g01475066

Typical example

2. Remove bolts (1) that secure bypass tube (2) to front housing (3). Remove bypass tube (2). Remove O-ring seal (4) and O-ring seal (5) from bypass tube (2).

Note: Note the position of any brackets that are secured by the bolts.

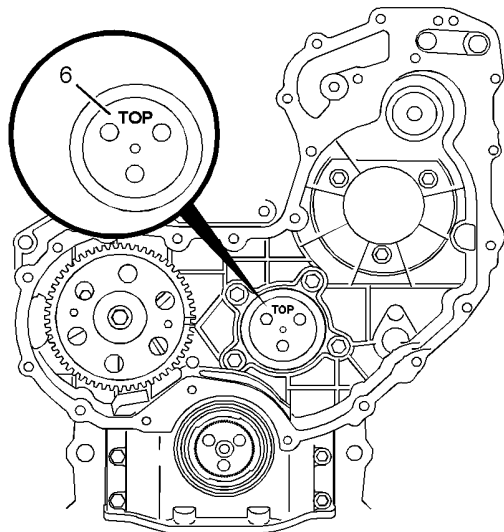


Illustration 171

g01475068

Typical example

3. If the engine is equipped with a heavy duty idle gear. Remove plate (6). Refer to Disassembly and Assembly, "Idle Gear - Remove" for the correct procedure.

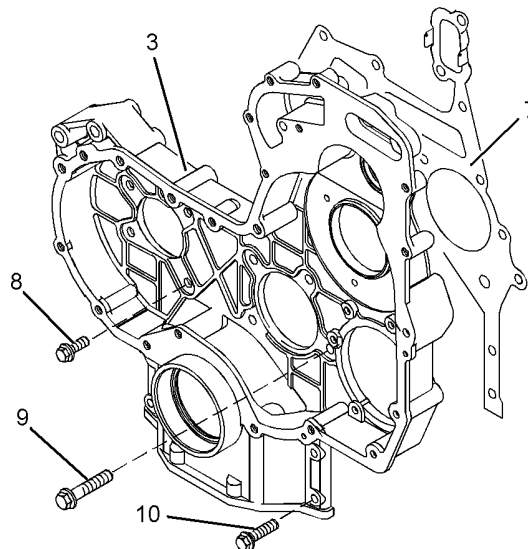


Illustration 172

g01475067

Typical example

4. Remove bolts (8), (9) and (10) from front housing (3).

Note: The bolts are three different lengths. Note the positions of the different bolts.

5. Remove front housing (3) from the cylinder block.

6. Remove gasket (7).

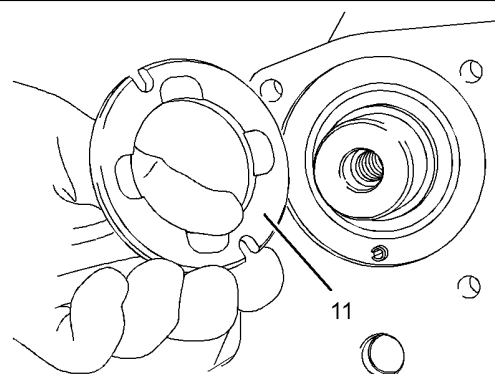


Illustration 173

g01475069

Typical example

7. Remove thrust washer (11) from the cylinder block.

i02933655

Housing (Front) - Install

Installation Procedure

Table 45

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820117	POWERPART Threadlock and Nutlock	1
B	-	Guide Stud (M8 by 80 mm)	2
C	27610216	Alignment Tool	1
	-	Bolts (M10 by 50 mm)	3
D	-	Straight Edge	1
E	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the front housing is clean and free from damage. If necessary, replace the front housing.

If necessary, install blanking plugs to a new front housing. Use Tooling (A) to seal all D-plugs.
2. Check the condition of the crankshaft front seal. If the front seal is damaged, remove the front seal from the front housing.
3. Clean the surfaces of the cylinder block.

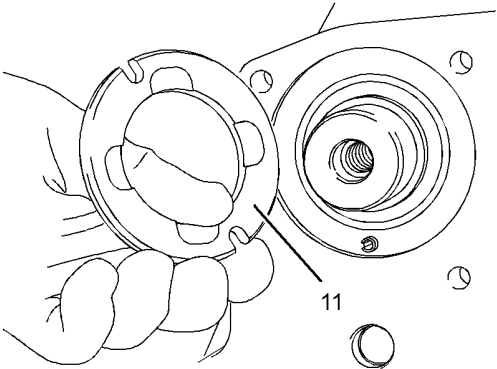


Illustration 174

g01475069

Typical example

4. Install thrust washer (11) into the recess in the cylinder block. Refer to Disassembly and Assembly, "Camshaft - Install" for more information.

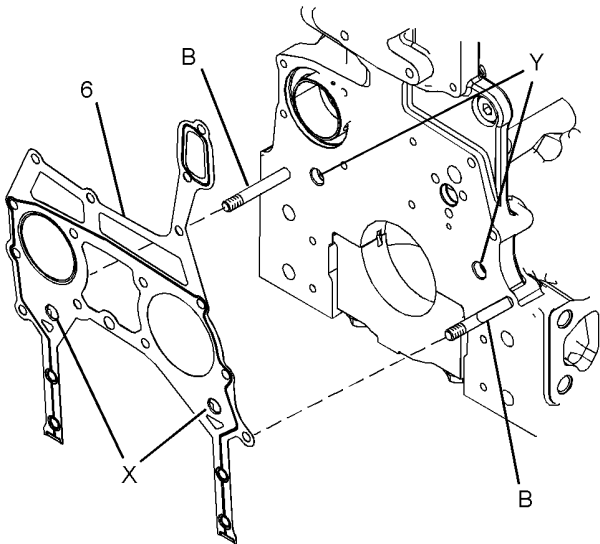


Illustration 175

g01475134

Typical example

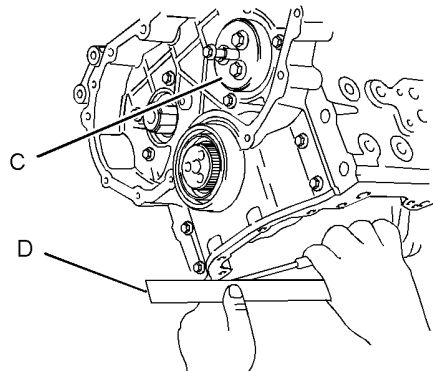


Illustration 176

g01269947

Typical example

5. Install Tooling (B) to the cylinder block. Refer to Illustration 175.
6. Install Tooling (C) to the cylinder block.
7. Align a new gasket (6) with Tooling (B) and Tooling (C). Install the gasket to the cylinder block.

Note: Ensure that Tabs (X) on the gasket are engaged in Holes (Y) in the cylinder block.

8. Install the front housing over Tooling (B) and over Tooling (C) onto the cylinder block.

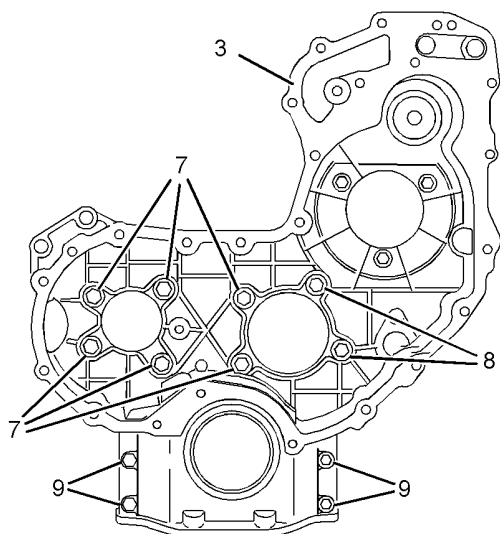


Illustration 177

g01269948

- (7) M8 by 20 mm
- (8) M8 by 35 mm
- (9) M8 by 25 mm

9. Install bolts (9) to front housing (3) finger tight.
10. Remove Tooling (B).
11. Loosely install bolt (7) and bolt (8). Refer to Illustration 177 for the correct position of the bolts.
12. Align the bottom face of front housing (3) to the lower machined face of the cylinder block. Use Tooling (D) and a feeler gauge in order to check the alignment between the front housing and the cylinder block. Refer to Illustration 176. Refer to Specifications, "Front Housing and Covers" for further information.

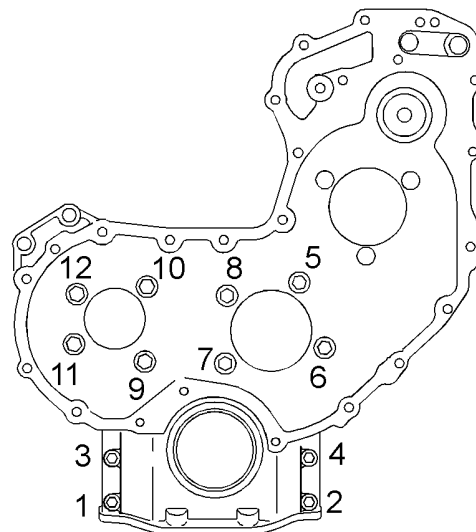


Illustration 178

g01269949

Tightening sequence for the front housing

13. Tighten bolts (7), (8) and (9) to a torque of 28 N·m (20 lb ft). Tighten the bolts in the sequence that is shown in Illustration 178.

Note: Ensure that the housing and the cylinder block are correctly aligned.

14. Remove Tooling (C) from the cylinder block.

15. If necessary, install a new crankshaft front seal. Refer to Disassembly and Assembly, "Crankshaft Front Seal - Remove and Install".

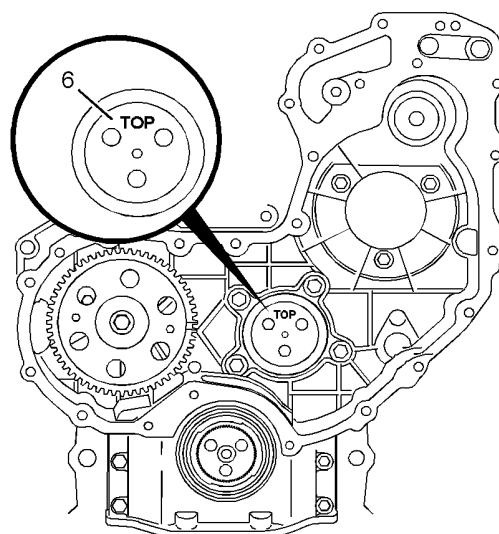


Illustration 179

g01475068

Typical example

i02933583

16. If the engine is equipped with a heavy duty idle gear. Install plate (6). Refer to Disassembly and Assembly, "Idle Gear - Install" for the correct procedure.

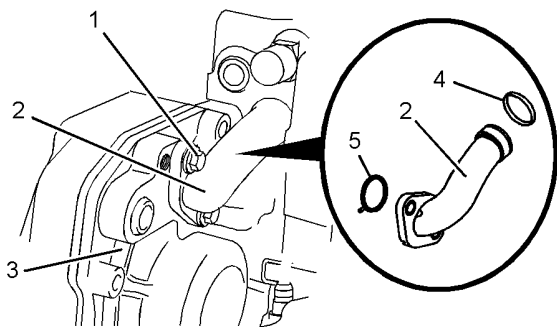


Illustration 180

g01475066

Typical example

17. Install new O-ring seal (4) and O-ring seal (5) to bypass tube (2). Use Tooling (E) in order to lubricate O-ring seal (5). Install bypass tube (2) to front housing (3). Install bolts (1). Tighten the bolts to a torque of 22 N·m (16 lb ft).

Note: Ensure that any brackets that are secured by the bolts are installed in the correct location.

18. Fill the cooling system with coolant. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.

End By:

- a. Install the fuel injection pump. Refer to Disassembly and Assembly, "Fuel Injection Pump - Install".
- b. Install the timing gears. Refer to Disassembly and Assembly, "Gear Group (Front) - Remove and Install".
- c. Install the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
- d. Install the crankshaft pulley. Refer to Disassembly and Assembly, "Crankshaft Pulley - Remove and Install".
- e. Install the alternator. Refer to Disassembly and Assembly, "Alternator - Install".
- f. Install the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".

Accessory Drive - Remove

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

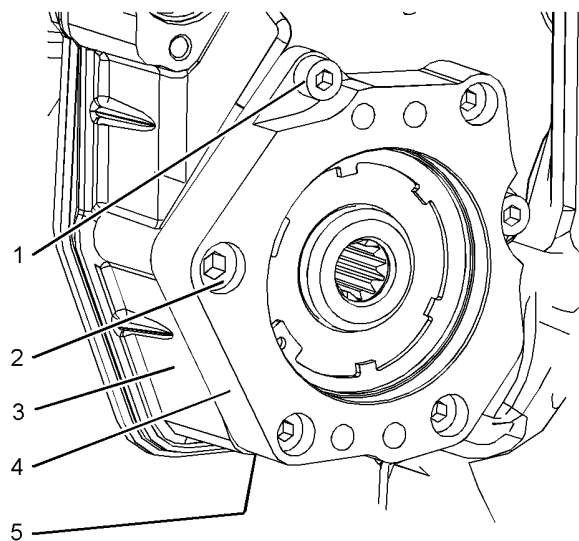


Illustration 181

g01441026

Typical example

1. Remove allen head screw (1) from accessory drive housing (4). Remove allen head screws (2) from accessory drive housing (4).
2. Remove accessory drive housing (4) from front housing (3).
3. Remove O-ring seal (5) (not shown) from accessory drive housing (4).

i02933581

Accessory Drive - Disassemble

Disassembly Procedure

Table 46

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Bearing Puller	1
	-	Puller	1
	-	Crossblock	1
	-	Puller Leg	2

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

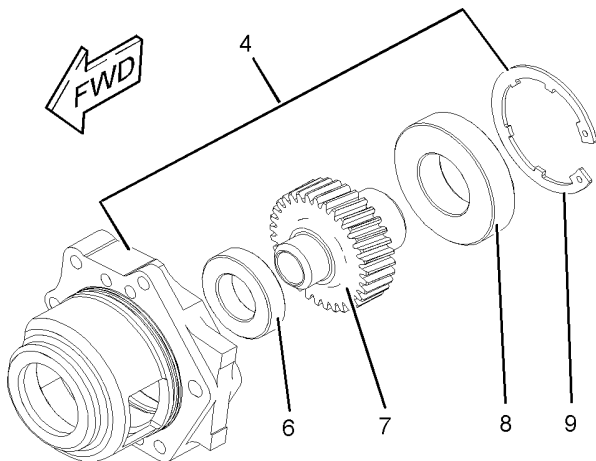


Illustration 182

g01440573

Typical example

1. Remove circlip (9) from accessory drive housing (4).

2. Place accessory drive housing (4) onto a suitable support. Press the assembly of gear (7), bearing (6) and bearing (8) out of accessory drive housing (4).
3. Use a Tooling (A) in order to remove bearing (6) and bearing (8) from gear (7).

i02933580

Accessory Drive - Assemble

Assembly Procedure

Table 47

Required Tools			
Tool	Part Number	Part Description	Qty
B	21820603	POWERPART Retainer	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

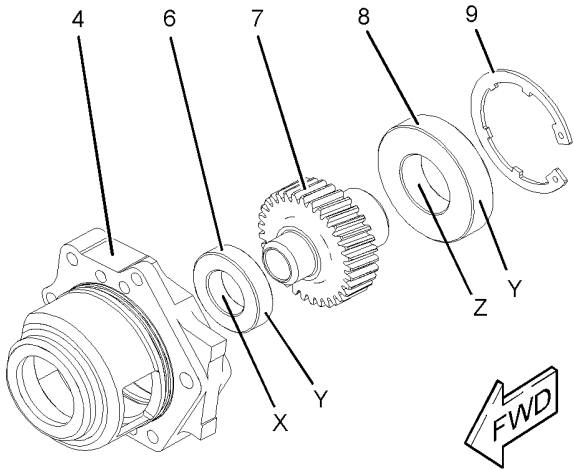


Illustration 183

g01440577

Typical example

1. Inspect the condition of the teeth and the splines of gear (7) for wear or damage. Inspect bearing (6) and bearing (8). Inspect circlip (9), and front housing (4) for wear or damage. Replace any components that are worn or damaged.

2. Apply a small continuous bead of Tooling (B) to inner Surface (X) of bearing (6). Place the gear shaft on a suitable support. Press on the inner race of bearing (6) until bearing (6) is against the shoulder of gear (7). Remove any excess sealant.
3. Apply a small continuous bead of Tooling (B) to inner Surface (Z) of bearing (8). Place the inner race of bearing (8) onto a suitable support. Press the shaft of gear (7) onto bearing (8) until the shoulder of the gear is against the bearing. Remove any excess sealant.
4. Apply a small continuous bead of Tooling (B) to outer Surface (Y) of bearing (6) and bearing (8). Place accessory drive housing (4) on a suitable support. Press the assembly of the gear into the accessory drive housing. Ensure that bearing (6) is against the front face of the recess in accessory drive housing (4). Remove any excess sealant.
5. Install circlip (9) into the groove in accessory drive housing (4). Ensure that circlip (9) is correctly positioned in the groove.

i02933582

Accessory Drive - Install

Installation Procedure

Table 48

Required Tools			
Tool	Part Number	Part Description	Qty
C	21820221	POWERPART Rubber Lubricant	1
D	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

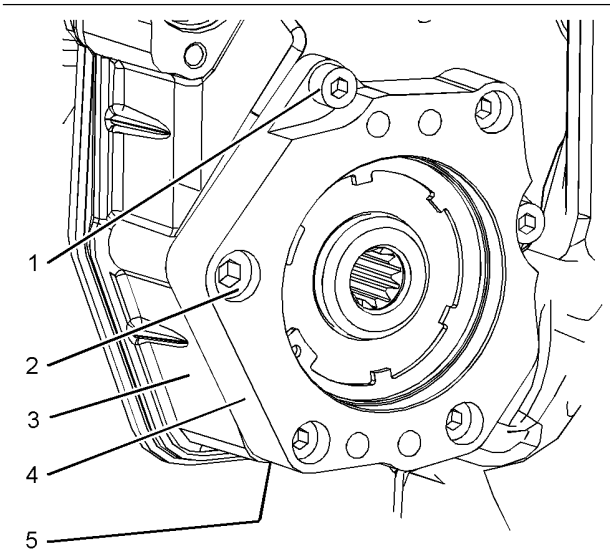


Illustration 184
Typical example

g01441026

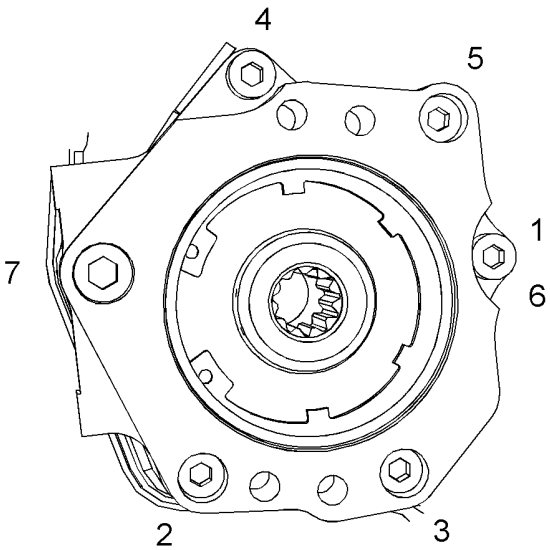


Illustration 185
Sequence for tightening accessory drive

g01444555

1. Inspect the bore in front housing (3) for damage. If necessary, replace the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Remove" and Disassembly and Assembly, "Housing (Front) - Install".
2. Lightly lubricate a new O-ring seal (5) (not shown) with Tooling (C). Install the O-ring seal (not shown) into the groove in accessory drive housing (4).
3. Lightly lubricate all bearings, and all gears with clean engine lubricating oil. Install the assembly of the accessory drive to the front housing. Ensure that the flange on the accessory drive housing is flush with the front housing.

4. Apply Tooling (D) to allen head screws (1) and allen head screw (2).
5. Install allen head screws (1) and allen head screw (2) to accessory drive housing (4).
6. Tighten allen head screws (1) to a torque of 22 N·m (16 lb ft).

Tighten allen head screw (2) to a torque of 44 N·m (32 lb ft). Tighten allen head screws (1) and (2) in the sequence that is shown in Illustration 185.

7. Ensure that there is tactile backlash between the idler gear and the accessory drive gear.

i02933599

Crankcase Breather - Remove and Install (Filtered Breather)

Removal Procedure

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting, and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

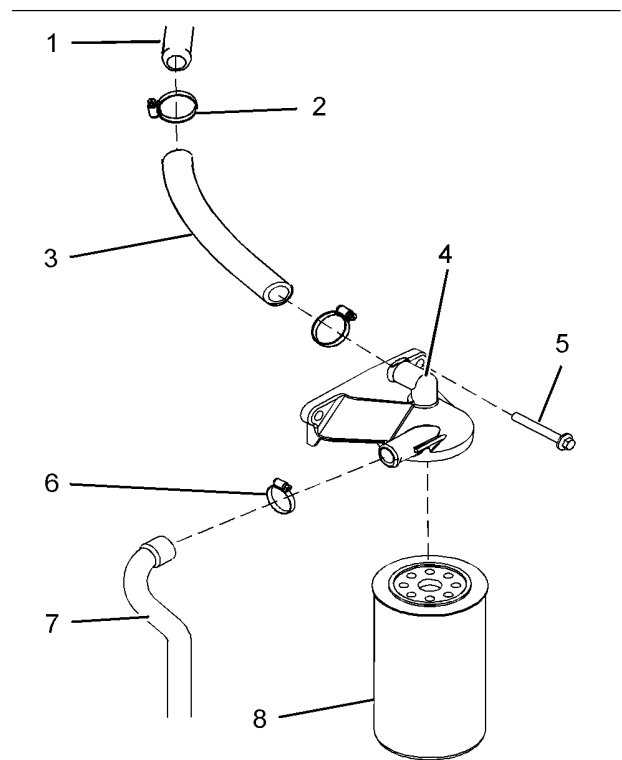


Illustration 186

g01475258

Typical example

1. Remove canister (8). Refer to Operation and Maintenance Manual, "Crankcase Breather (Canister) - Replace".
2. Loosen clamp (6) and remove hose (7).
3. Release spring clamps (2) in order to remove hose (3). Remove the hose from connection (1) on the valve mechanism cover and from filter base (4).
4. Remove bolts (5) and remove filter base (4).

Note: If a spacer is installed between the filter base and the engine, remove the spacer.




Illustration 187

g01903114

5. If necessary, use a suitable tool in order to remove connection (9) from filter base (4).

Installation Procedure

Table 49

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820118	Thread Lock Compound	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components of the crankcase breather are clean and free from damage. Replace any components that are damaged.




Illustration 188

g01903114

2. If necessary, install connection (9) to filter base (4). Follow Step 2.a through Step 2.c in order to install connection (9) to filter base (4).
- Apply a bead of Tooling (A) to the threads of connection (9).
 - Install connection (9) to filter base (4).
 - Tighten connection (9) to a torque of 50 N·m (37 lb ft).

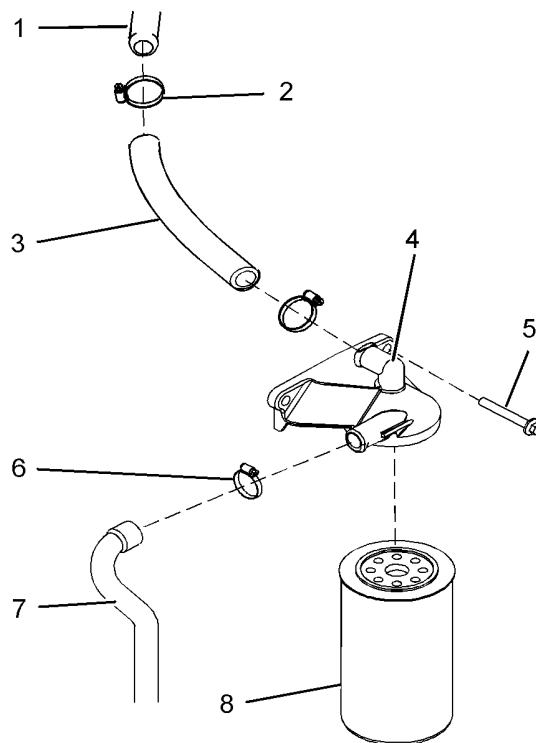


Illustration 189

g01475258

Typical example

3. Install bolts (5) to filter base (4).

Note: If spacers are installed, position the spacers over the bolts.

4. Install the assembly of the filter base to the engine.

5. Tighten bolts (5) to a torque of 22 N·m (16 lb ft).

6. Install spring clamps (2) to hose (3). Install hose (3) to connection (1) on the valve mechanism cover and to filter base (4).

Note: Ensure that the spring clamps are correctly positioned in order to secure the hose.

7. Install clamp (6) to hose (7). Install hose (7) to filter base (4). Tighten the clamp securely.

8. Install a new canister (8) to filter base (4). Refer to Operation and Maintenance Manual, "Crankcase Breather (Canister) - Replace".

i02933600

Crankcase Breather - Remove and Install (Unfiltered Breather)

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

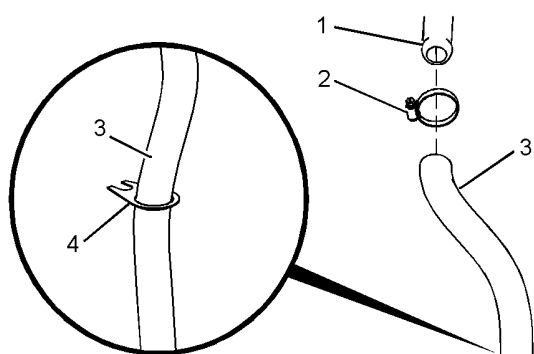


Illustration 190

g01475234

Typical example

1. Loosen clamp (2) and remove hose (3) from connection (1) on the valve mechanism cover. Withdraw hose (3) from clip (4) and remove the hose.

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components of the crankcase breather are clean and free from damage. Replace any components that are damaged.

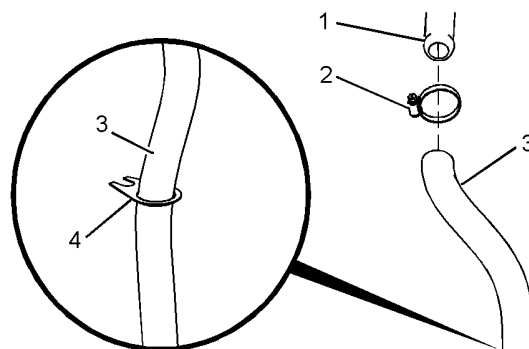


Illustration 191

g01475234

Typical example

2. Connect hose (3) to connection (1) on the valve mechanism cover. Tighten clamp (2). Install hose (3) into clip (4).

i02933677

Valve Mechanism Cover - Remove and Install

Removal Procedure

Start By:

- a. Disconnect the crankcase breather or remove the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

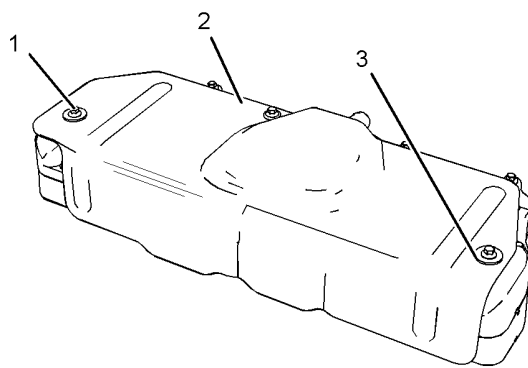


Illustration 192

g01788614

1. If the valve mechanism cover is equipped with a heat shield, remove bolts (1) and washers (3) from heat shield (2).

Note: The washers are two different sizes. Note the position of the washers for installation purposes.

2. Remove heat shield (2).

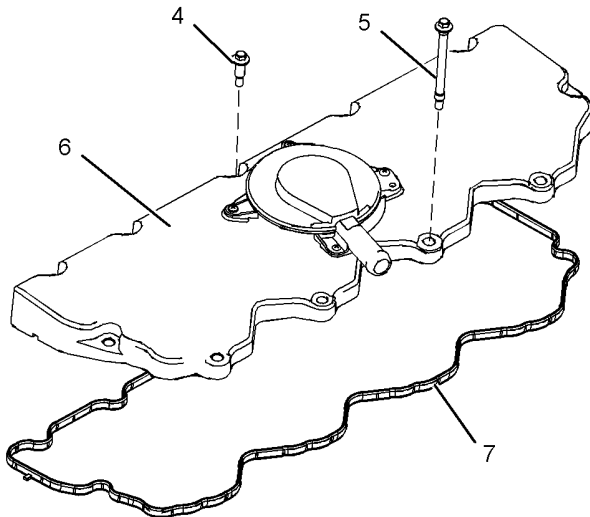


Illustration 193

g01788720

Typical example

3. Remove bolts (4) and bolts (5) from valve mechanism cover (6).
4. Remove valve mechanism cover (6) from the valve mechanism cover base.
5. Remove gasket (7) from valve mechanism cover (6).

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Thoroughly clean the valve mechanism cover. Clean the faces of the valve mechanism cover base.

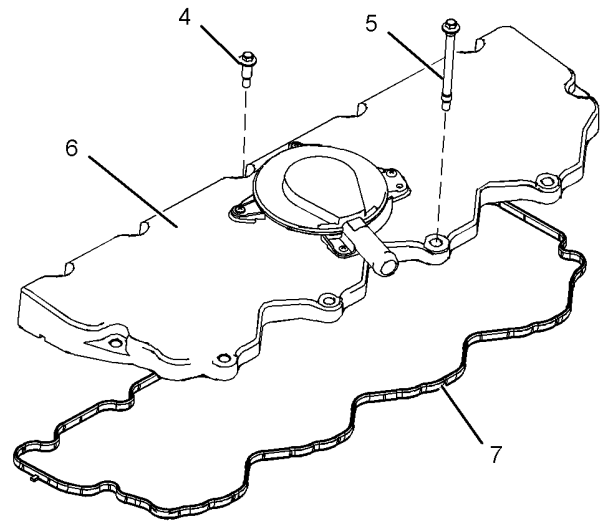


Illustration 194

g01788720

Typical example

2. Install a new gasket (7) to valve mechanism cover (6).

Note: Ensure that the gasket is fully seated into the groove of the valve mechanism cover.

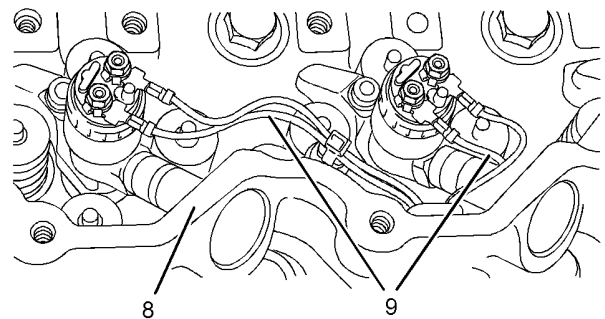


Illustration 195

g01788815

Typical example

3. Ensure that harness assemblies (9) are not in contact with the rocker arms or in contact with the valve mechanism cover base. Position valve mechanism cover (6) onto valve mechanism cover base (8). Ensure that harness assemblies (9) are not trapped during the assembly procedure. Install bolts (4) and bolts (5).

i02933678

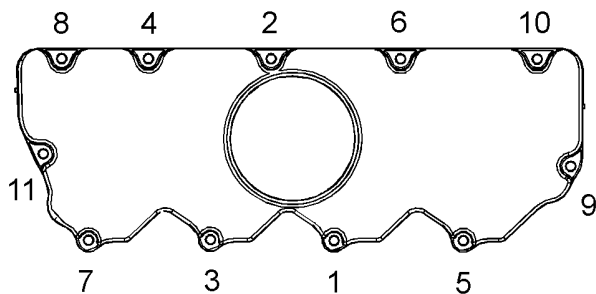


Illustration 196
Tightening sequence for the valve mechanism cover

4. Tighten bolts (4) and bolts (5) in the numerical sequence that is shown in Illustration 196. Tighten the bolts to a torque of 6 N·m (53 lb in).

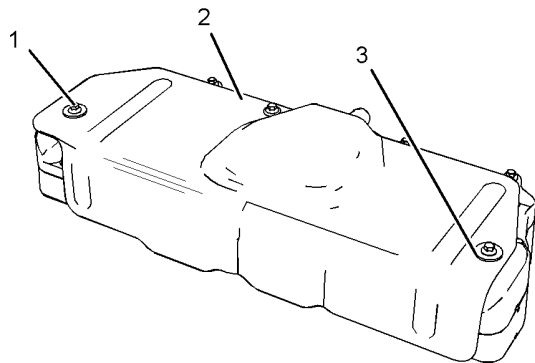


Illustration 197

5. If necessary, position heat shield (2) onto the valve mechanism cover.
6. Install bolts (1) and washers (3). Tighten the bolts to a torque of 9 N·m (80 lb in).

End By:

- a. Connect the crankcase breather or install the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".

Valve Mechanism Cover Base - Remove and Install

Removal Procedure

Table 50

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1

Start By:

- a. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".
- b. Remove the fuel injection lines. Refer to Disassembly and Assembly, "Fuel Injection Lines - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

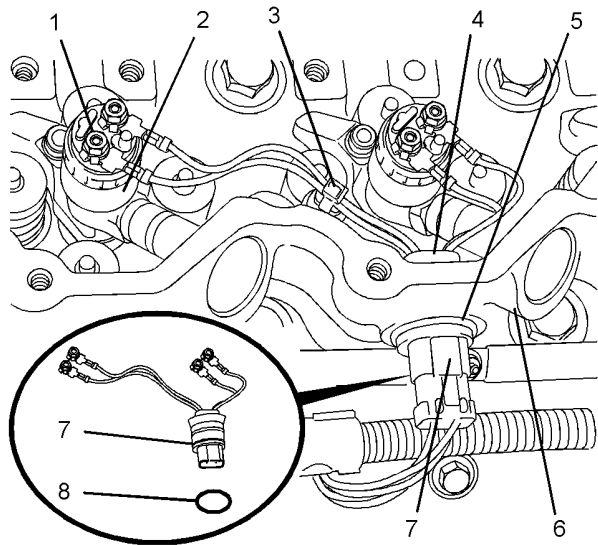


Illustration 198
Typical example

g01476212

1. Make a temporary identification mark on connections (1).
2. Use a deep socket to remove connections (1) from electronic unit injectors (2).
3. Disconnect plugs (7) from harness assemblies (4).
4. If necessary, follow Step 4.a through Step 4.e in order to remove harness assemblies (4) from valve mechanism cover base (6).
 - a. Cut cable strap (3).
 - b. Use Tooling (A) to remove circlip (5).
 - c. From the outside of valve mechanism cover base (6), push harness assembly (4) inward. Withdraw the harness assembly from valve mechanism cover base (6).
 - d. Remove O-ring seal (8) from harness assembly (4).
 - e. Repeat Step 4.a through Step 4.d in order to remove the remaining harness assembly.

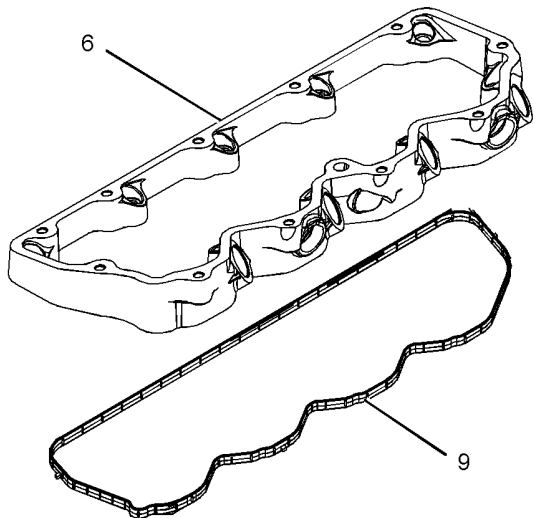


Illustration 199
Typical example

g01245186

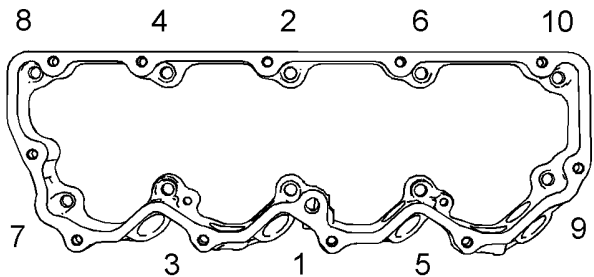


Illustration 200
Sequence for loosening captive bolts in valve mechanism

g01245190

5. Progressively loosen the captive bolts that secure the valve mechanism cover base in reverse numerical order. Refer to Illustration 200. This will help prevent distortion of the valve mechanism cover base.
- Note:** The captive bolts cannot be removed from the valve mechanism cover base.
6. Remove the valve mechanism cover base from the cylinder head.
 7. Remove gasket (9) from the valve mechanism cover base .

Installation Procedure

Table 51

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1
B	21820221	POWERPART Rubber Grease	1
C	27610296	Torque wrench	1
D	27610349	Alignment Pins	2

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Use a deep socket in order to remove the electrical connections from the electronic unit injectors. Use of incorrect tooling will result in damage to the electronic unit injectors.

1. Clean the valve mechanism cover base. Ensure that the gasket surfaces are free from damage.

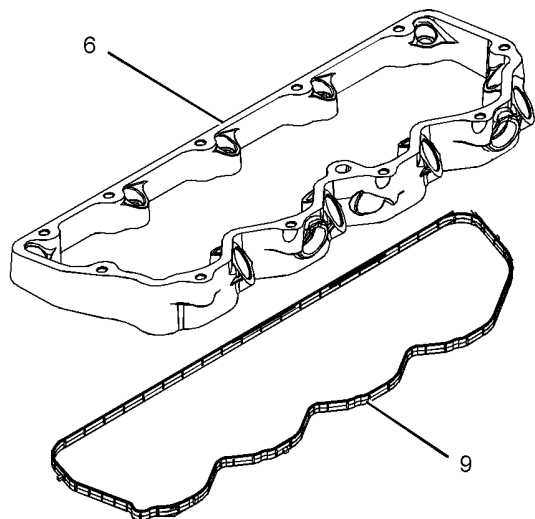


Illustration 201

g01245186

Typical example

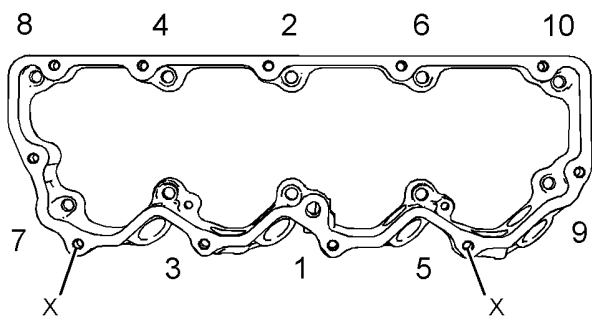


Illustration 202

g01272185

Tightening sequence for the valve mechanism cover base

2. Install gasket (9) to valve mechanism cover base (6). Ensure that the gasket is seated correctly in the groove in the valve mechanism cover base.
3. Position valve mechanism cover base (6) on the cylinder head.
4. Install Tooling (D) into the valve mechanism cover base in Positions (X).
5. Progressively tighten the captive bolts that secure the valve mechanism cover base. Tighten the captive bolts to a torque of 9 N·m (79 lb in) in the sequence that is shown in Illustration 202.
6. Remove Tooling (D).

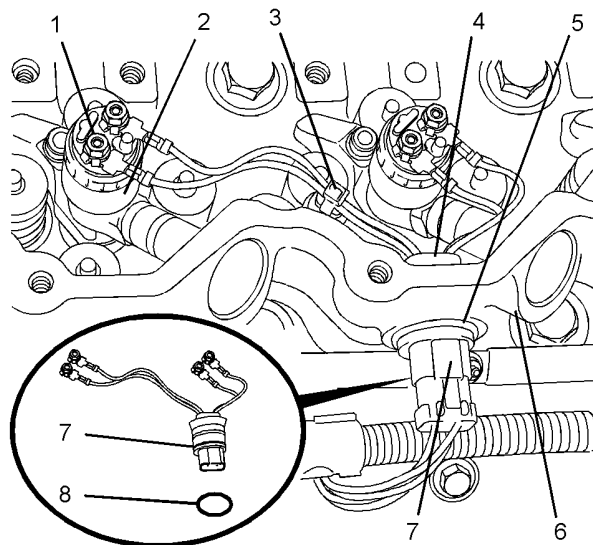


Illustration 203

g01476212

Typical example

7. If necessary, install the harness assemblies for the electronic unit injectors. Follow Step 7.a through Step 7.e in order to install the harness assemblies to the electronic unit injectors.
 - a. Ensure that harness assembly (4) and the bore in valve mechanism cover base (6) are clean and free from damage. Replace any damaged components.
 - b. Use Tooling (B) to lubricate a new O-ring seal (8). Install O-ring seal (8) onto harness assembly (4).
 - c. From the inside of valve mechanism cover base (6), push harness assembly (4) into the valve mechanism cover base.
 - d. Use Tooling (A) to install circlip (5).
 - e. Repeat Step 7.a through Step 7.e for the remaining harness assembly.
 8. Use a deep socket to connect harness (4) to electronic unit injectors (2). Use Tooling (C) to tighten connectors (1) to a torque of 2.4 N·m (21 lb in).
 9. If necessary, install new cable strap (3) to harness assemblies (4).
- Note:** Ensure that the cable straps conform to the Perkins specification.
10. Connect plugs (7) to harness assemblies (4).

End By:

- a. Install new fuel injection lines. Refer to Disassembly and Assembly, "Fuel Injection Lines - Install".
- b. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

i02933672
Rocker Shaft and Pushrod - Remove

Removal Procedure

Table 52

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	E12 Torx Socket	1

Start By:

- a. Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

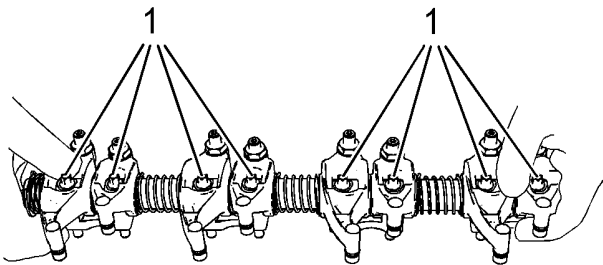


Illustration 204

g01476297

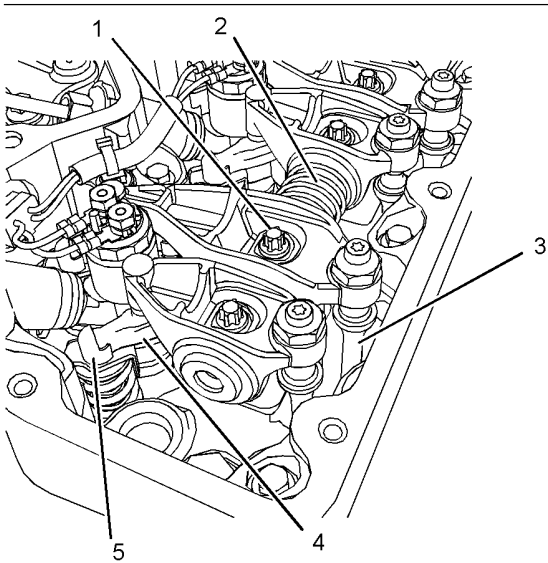


Illustration 205

g01792634

Typical example

1. Use Tooling (A) in order to progressively loosen torx screws (1). Begin at the ends of the rocker shaft assembly and work toward the center.

Note: To avoid distortion of the rocker shaft assembly, each torx screw should be loosened by a quarter of a turn at one time. Repeat the procedure until all torx screws are loosened.

2. Remove torx screws (1) from rocker shaft assembly (2).
3. Remove rocker shaft assembly (2) from the cylinder head.
4. Make a temporary mark on pushrods (3) in order to show the location. Remove the pushrods from the cylinder head.

Note: Identification will ensure that the pushrods can be reinstalled in the original positions. Do not interchange the positions of used pushrods.

5. Make a temporary mark on valve bridges (4) in order to show the location and the orientation. Remove the valve bridges from the cylinder head. If the valve bridges are equipped with shrouds (5), ensure that the shrouds are removed from the cylinder head.

Note: Identification will ensure that the valve bridges can be reinstalled in the original location and the original orientation. Do not interchange the location or the orientation of used valve bridges.

i02933670

Rocker Shaft - Disassemble

Disassembly Procedure

Start By:

- a. Remove the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Remove".

WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Make an identification mark on each rocker arm assembly in order to show the location.

Note: The components must be reinstalled in the original location. Do not interchange components.

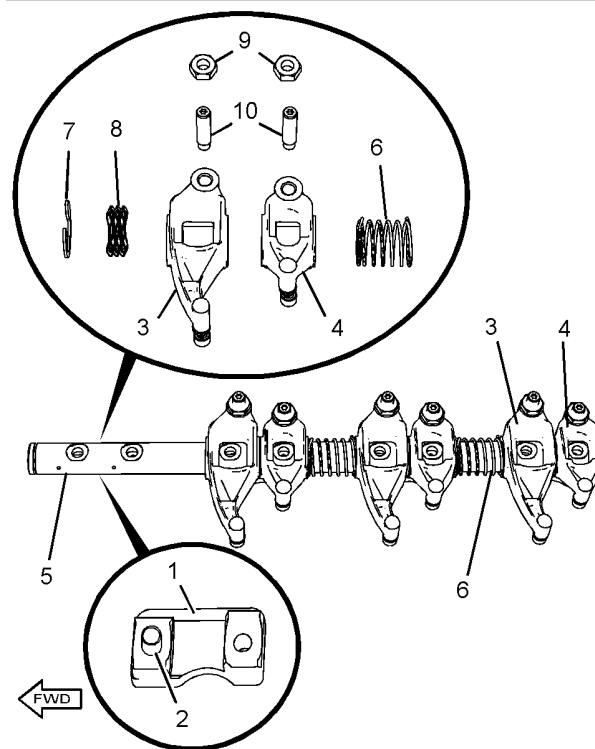


Illustration 206

g01476312

Typical example

2. Remove pedestals (1) from rocker shaft (5). Do not remove dowels (2) from the pedestals.
3. Remove rocker arm assembly (4) for the exhaust valve from rocker shaft (5). Remove rocker arm assembly (3) for the inlet valve from rocker shaft (5). Begin at the rear of the rocker shaft assembly.

Note: The rocker arm assembly for the inlet valve is longer than the rocker arm assembly for the exhaust valve.

4. Remove spring (6) from rocker shaft (5).
5. Repeat Step 3 and Step 4 in order to remove the remaining rocker arms from rocker shaft (5).

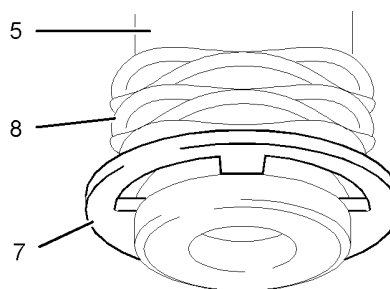


Illustration 207

g01181801

6. If necessary, remove retaining clip (7) and remove spring (8) from the front end of rocker shaft (5).
7. If necessary, remove nuts (9) and adjusters (10) from the rocker arms. Make a temporary identification mark on each adjuster in order to show the location.

Note: The components must be reinstalled in the original location. Do not interchange components.

i02933669

Rocker Shaft - Assemble

Assembly Procedure

WARNING

Personal injury can result from being struck by parts propelled by a released spring force.

Make sure to wear all necessary protective equipment.

Follow the recommended procedure and use all recommended tooling to release the spring force.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components are clean and free from wear or damage. Refer to Specifications, "Rocker Shaft" for more information. If necessary, replace any components that are worn or damaged.

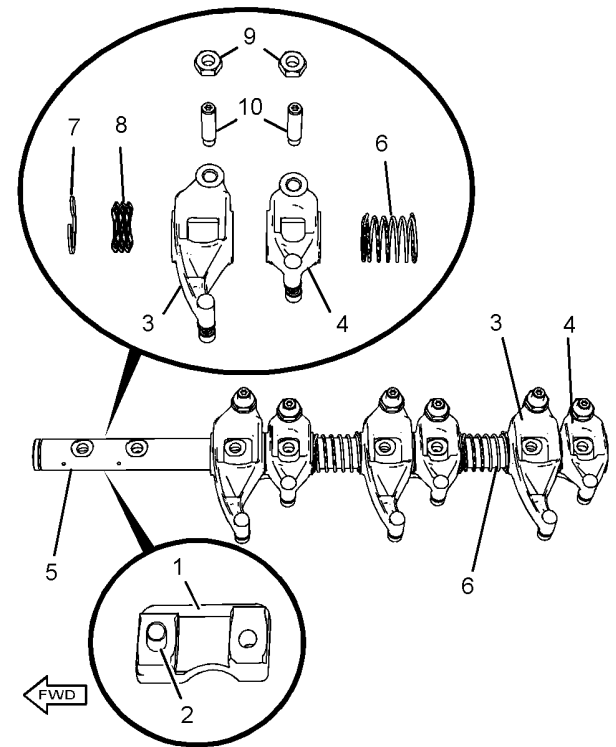


Illustration 208

g01476312

Typical example

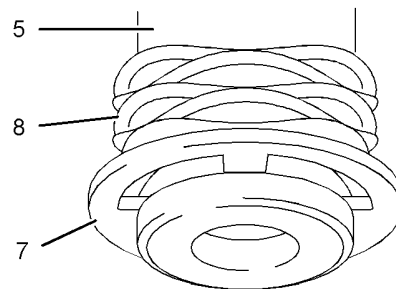


Illustration 209

g01270008

2. If necessary, install nuts (9) and adjusters (10) to rocker arm assemblies (3) and (4). If the original adjusters are reused, ensure that the adjusters are installed in the original positions.
3. Install retaining clip (7) and spring (8) to the front end of rocker shaft (5).
4. Lubricate the bores of rocker arm assemblies (3) and (4) and rocker shaft (5) with clean engine oil.

5. Place the rocker shaft in the inverted position with the counterbores for the holes downward. Install rocker arm assembly (3) for number 1 cylinder inlet valves to the rocker shaft. Install rocker arm assembly (4) for number 1 cylinder exhaust valves to rocker shaft (5).

Note: The rocker arms for the inlet valves are longer than the rocker arms for the exhaust valves. Install rocker arms in the inverted position. Used components should be installed in the original location.

6. Ensure that dowel (2) is correctly seated in pedestal (1). Align the dowel with the appropriate hole in rocker shaft (5). Install the pedestal to the rocker shaft.
7. Install spring (6) to rocker shaft (5).
8. Repeat Step 5 through Step 7 in order to assemble the remaining components to rocker shaft (5).

End By:

- a. Install the rocker shaft assembly. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Install".

i02933671

Rocker Shaft and Pushrod - Install

Installation Procedure

Table 53

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	E10 Torx Socket	1
B	27610298	Feeler Gauge	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Clean the valve bridges. Inspect the valve bridges for wear or damage. Replace any valve bridges that are worn or damaged.

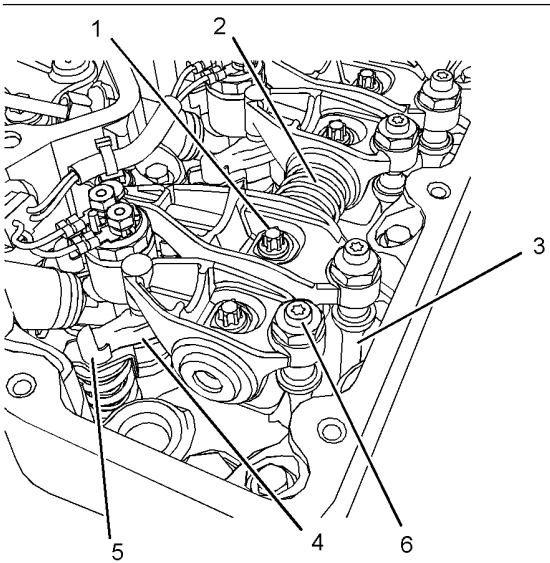


Illustration 210

g01794035

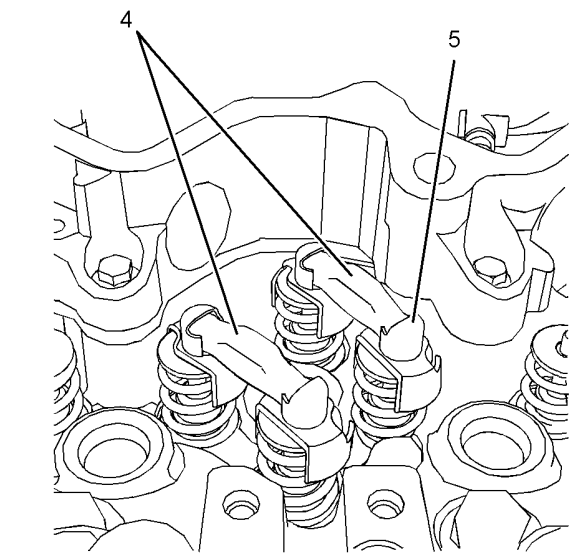


Illustration 211

g01794053

The correct location of valve bridges on valve stems is shown. The electronic unit injector is not shown for clarity.

NOTICE

Failure to ensure that ALL valve bridges are correctly seated onto the valve stems will cause interference between the pistons and the valves, resulting in damage to the engine.

2. Lubricate valve bridges (4) with clean engine oil. Install the valve bridges to the cylinder head.
3. Install valve bridges (4) to the cylinder head. If the valve bridges are equipped with shrouds (5), ensure that the shrouds are located correctly.

Note: Install used valve bridges in the original location and in the original orientation. Ensure that the valve bridges are correctly seated on the valves. New valve bridges may be installed in either orientation.

4. Clean pushrods (3). Inspect the pushrods for wear or damage. Replace any pushrods that are worn or damaged.
5. Apply clean engine lubricating oil to both ends of pushrods (3). Install the pushrods to the engine with the cup upward.

Note: Ensure that the pushrods are installed in the original location and that the ball end of each pushrod is correctly seated in the valve lifters.

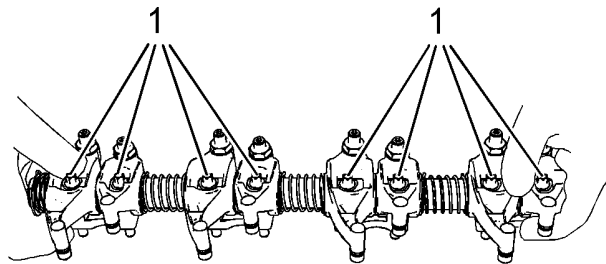


Illustration 212

g01476297

6. Ensure that the rocker shaft assembly is clean and free from wear or damage. Install torx screws (1) in the rocker shaft.

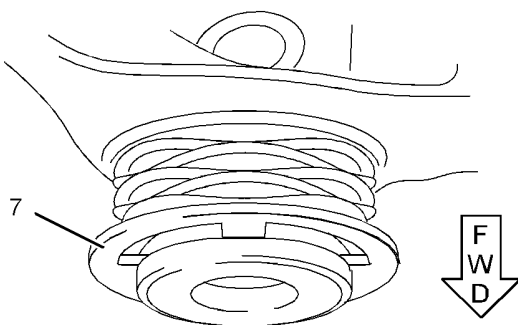


Illustration 213

g01794061

7. Position rocker shaft assembly (2) onto the cylinder head. Retaining clip (7) should face the front of the engine.

Note: Ensure that adjustment screws (6) are properly seated in the ends of pushrods (3).

8. Use Tooling (A) to gradually tighten torx screws (1).

Note: To avoid distortion of rocker shaft assembly (2), tighten the torx screws in the center first. Work toward the outside of the rocker shaft assembly.

Tighten the torx screws to a torque of 35 N·m (26 lb ft).

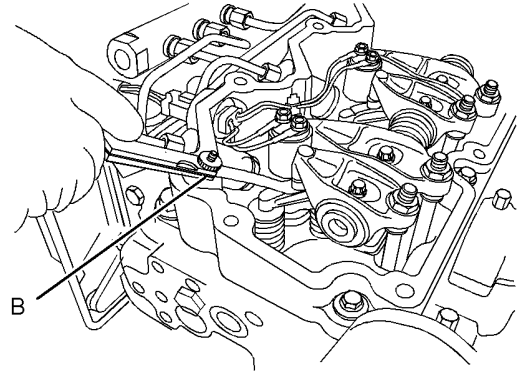


Illustration 214

g01259267

Typical example

9. Use Tooling (B) in order to check the valve lash. If necessary, adjust the valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust" for the correct procedure.

End By:

- a. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

i02933613

Cylinder Head - Remove

Removal Procedure

Start By:

- a. Remove the exhaust manifold. Refer to Disassembly and Assembly, "Exhaust Manifold - Remove and Install".
- b. Remove the fuel manifold. Refer to Disassembly and Assembly, "Fuel Manifold (Rail) - Remove and Install".
- c. Remove the mounting bracket for the electronic control module. Refer to Disassembly and Assembly, "ECM Mounting Bracket- Remove and Install".
- d. Remove the electronic unit injectors. Refer to Disassembly and Assembly, "Electronic Unit Injector - Remove".

- e. Remove the valve mechanism cover base. Refer to Disassembly and Assembly, "Valve Mechanism Cover Base - Remove and Install".
- f. Remove the glow plugs. Refer to Disassembly and Assembly, "Glow Plugs - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

1. If the alternator bracket is mounted on the cylinder head, remove the alternator. Refer to Disassembly and Assembly, "Alternator - Remove".
2. If the fuel priming pump and the primary fuel filter are mounted on the cylinder head, remove the fuel priming pump and the primary fuel filter. Refer to Disassembly and Assembly, "Fuel Priming Pump - Remove and Install".
3. Drain the coolant from the cooling system into a suitable container for storage or for disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct draining procedure.

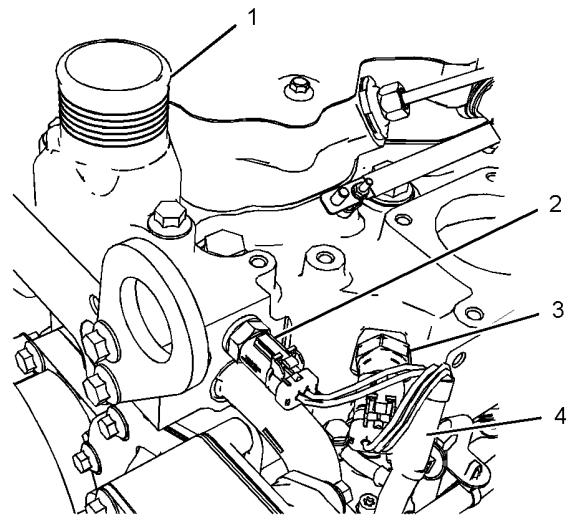


Illustration 215

g01245537

Typical example

4. Disconnect the upper radiator hose from water temperature regulator housing (1).
5. If necessary, remove the air hose from the inlet connection.
6. Follow Step 6.a and Step 6.b in order to disconnect harness assembly (4) from coolant temperature sensor (2).
 - a. Slide the locking tab into the unlocked position.
 - b. Disconnect harness assembly (4) from coolant temperature sensor (2).
7. If necessary, follow Step 7.a and Step 7.b in order to disconnect harness assembly (4) from boost pressure sensor (3).
 - a. Slide the locking tab into the unlocked position.
 - b. Disconnect harness assembly (4) from boost pressure sensor (3).

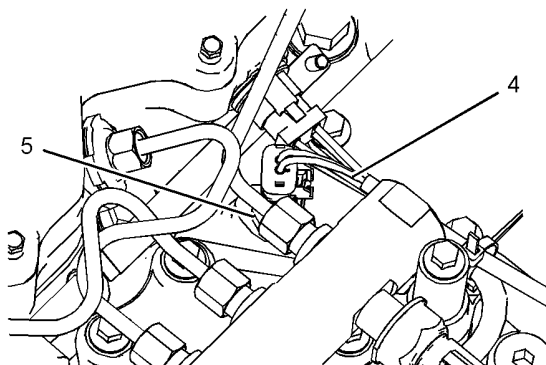


Illustration 216

g01249835

Typical example

8. Follow Step 8.a and Step 8.b in order to disconnect harness assembly (4) from inlet air temperature sensor (5).
 - a. Slide the locking tab into the unlocked position.
 - b. Disconnect harness assembly (4) from inlet air temperature sensor (5).
9. Remove all cable straps that secure harness assembly (4) to the cylinder head. The harness assembly should be positioned in order to avoid causing an obstruction during the removal of the cylinder head.

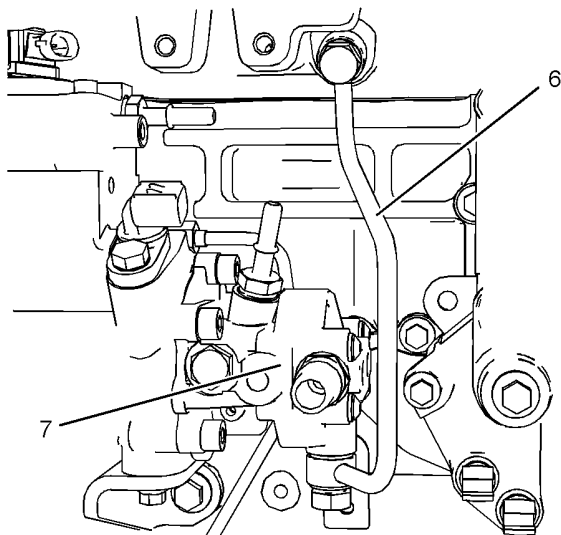


Illustration 217

g01249474

Typical example

10. Remove tube assembly (6) from the cylinder head and from transfer pump (7).

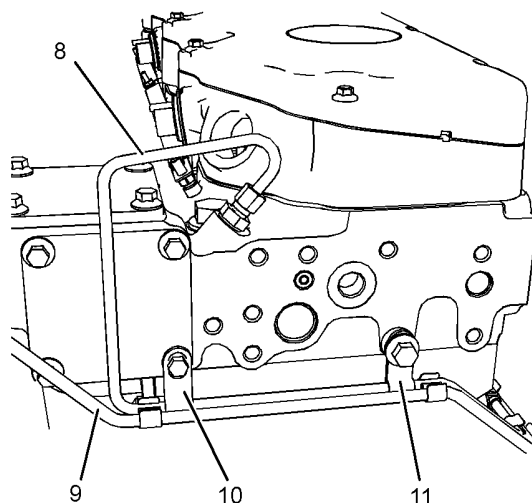


Illustration 218

g01249479

Typical example

11. If the engine is equipped with a wastegate solenoid, remove harness assembly (9) from tube assembly (8). Remove the bolts for tube clip (10) and tube clip (11). Remove tube assembly (8) from the wastegate solenoid and from the cylinder head.

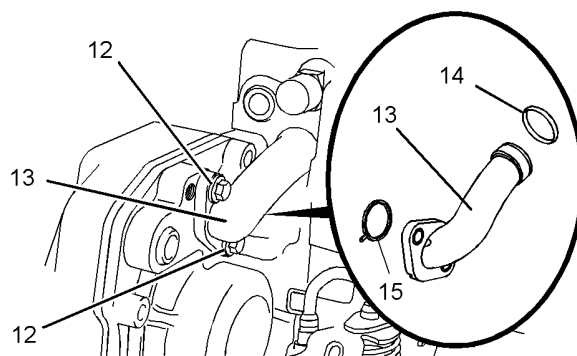


Illustration 219

g01476537

Typical example

12. Remove bolts (12). Note the position of any brackets that are secured by the bolts. Remove bypass tube (13) from the cylinder head. Remove O-ring seals (14) and (15) from the bypass tube.

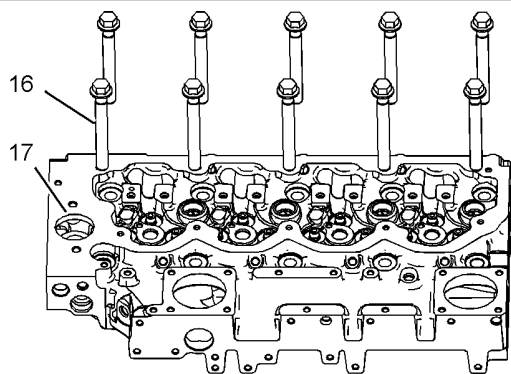


Illustration 220

g01245538

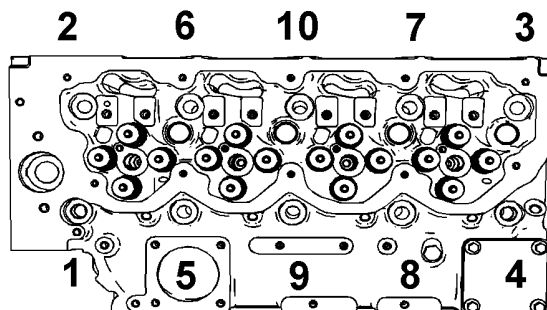


Illustration 221

g01250785

Sequence for loosening the bolts for the cylinder head

- 13.** Gradually loosen bolts (16) in the reverse numerical order to the sequence that is shown in Illustration 221.

Note: Follow the correct sequence in order to help prevent distortion of the cylinder head.

- 14.** Remove bolts (16) from cylinder head (17).

- 15.** Attach a suitable lifting device to cylinder head (17). Support the weight of the cylinder head. The weight of the cylinder head is approximately 56 kg (124 lb).

- 16.** Use the suitable lifting device to carefully lift cylinder head (17) off the cylinder block.

Note: Do not use a lever to separate the cylinder head from the cylinder block. Take care not to damage the machined surfaces of the cylinder head during the removal procedure.

NOTICE

Place the cylinder head on a surface that will not scratch the face of the cylinder head.

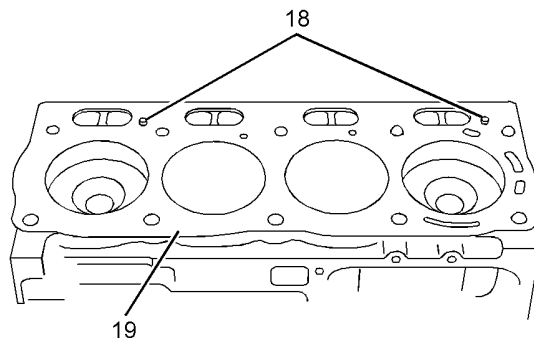


Illustration 222

g01763153

Typical example

- 17.** Remove cylinder head gasket (19).

- 18.** Note the position of dowels (18) in the cylinder block. Do not remove the dowels unless the dowels are damaged.

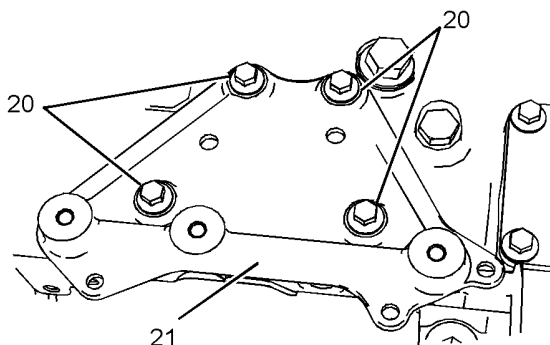


Illustration 223

g01763173

Typical example

- 19.** If necessary, remove screws (20) and remove mounting bracket (21) from the cylinder head.

- 20.** If necessary, remove the water temperature regulator from the cylinder head. Refer to Disassembly and Assembly, "Water Temperature Regulator - Remove and Install".

- 21.** If necessary, remove the electronic sensors from the cylinder head. Refer to Disassembly and Assembly, "Coolant Temperature Sensor - Remove and Install". Refer to Disassembly and Assembly, "Air Temperature Sensor - Remove and Install". Refer to Disassembly and Assembly, "Boost Pressure Sensor - Remove and Install".

i02933612

Cylinder Head - Install

Installation Procedure

Table 54

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Bolt M16 by 115mm	2
B	-	Straight Edge	1
C	21825607	Angle gauge	1
D	2180221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Thoroughly clean the gasket surfaces of the cylinder head and the cylinder block. Do not damage the gasket surfaces of the cylinder head or the cylinder block. Ensure that no debris enters the cylinder bores, the coolant passages, or the lubricant passages.
2. Inspect the gasket surface of the cylinder head for distortion. Refer to Specifications, "Cylinder Head" for more information. If the gasket surface of the cylinder head is distorted beyond maximum permitted limits, replace the cylinder head.

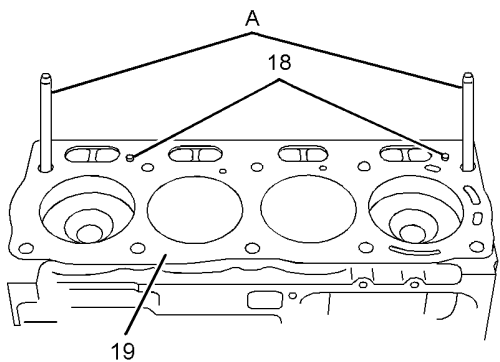


Illustration 224

g01763193

3. Inspect dowels (18) for damage. If necessary, replace the dowels in the cylinder block.
4. Install Tooling (A) to the cylinder block. Refer to Illustration 224.

5. Align cylinder head gasket (19) with Tooling (A) and with dowels (18). Install the cylinder head gasket onto the cylinder block.
6. Use a suitable lifting device to lift the cylinder head. The weight of the cylinder head is approximately 56 kg (124 lb).
7. Use Tooling (A) to align cylinder head (17) with the cylinder block. Install the cylinder head to the cylinder block.

Note: Ensure that the cylinder head is correctly positioned onto dowels (18).

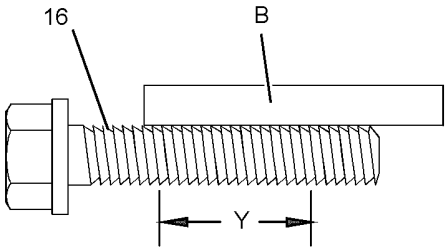


Illustration 225

g01250784

8. Clean bolts (16). Follow Step 8.a and Step 8.b for the procedure to inspect the bolts.
 - a. Check the length of the bolts.
 - b. Use Tooling (B) in order to check the threads of the bolts. Refer to Illustration 225. Replace any bolts that show visual reduction in the diameter of the thread over length (Y).
9. Lubricate the threads and the shoulder of bolts (16) with clean engine oil.
10. Remove Tooling (A).

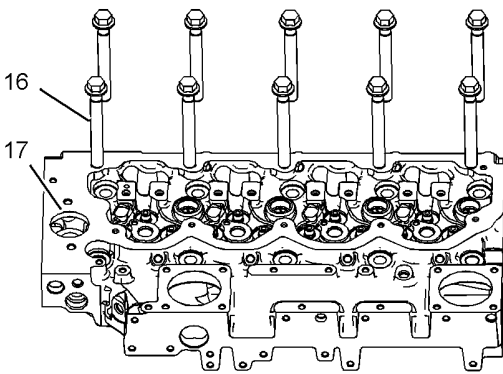


Illustration 226

g01245538

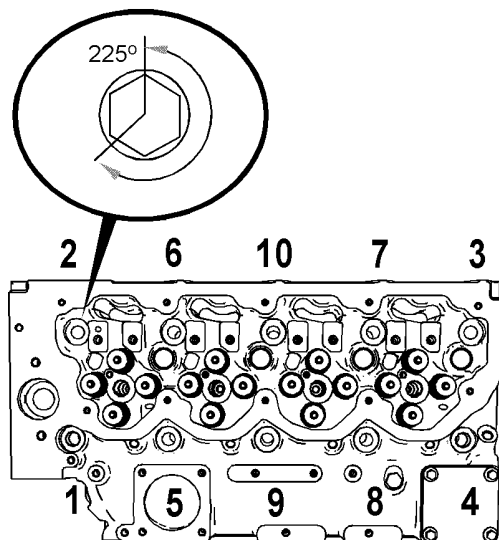


Illustration 227 g01476553

Sequence for tightening the bolts for the cylinder head

11. Install bolts (16) to cylinder head (17).
12. Tighten bolts (16) to a torque of 50 N·m (37 lb ft) in the sequence that is shown in Illustration 227.
13. Tighten bolts (16) to a torque of 100 N·m (74 lb ft) in the sequence that is shown in Illustration 227.
14. Use Tooling (C) to turn bolts (16) through an additional 225 degrees. Turn bolts (16) in the sequence that is shown in Illustration 227.

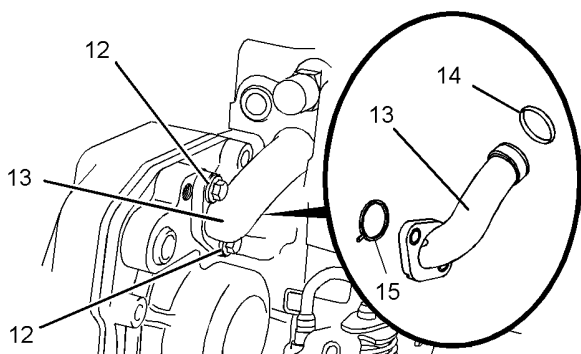


Illustration 228 g01476537

Typical example

15. Install new O-ring seal (14) and O-ring seal (15) to bypass tube (13). Use Tooling (D) in order to lubricate O-ring seal (14). Install the bypass tube to the cylinder head. Install bolts (12). Tighten the bolts to a torque of 22 N·m (16 lb ft).

Note: Ensure that any brackets that are secured by the bolts are installed in the correct position.

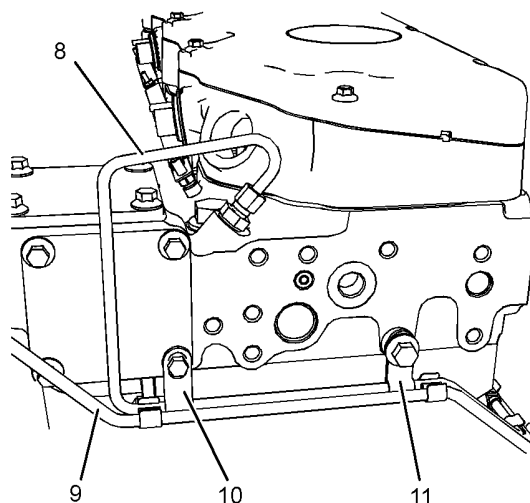


Illustration 229 g01249479

Typical example

16. If the engine is equipped with a wastegate solenoid, install tube assembly (9) to the wastegate solenoid and to the cylinder head. Install the bolts for tube clip (10) and tube clip (11). Tighten M8 bolts to a torque of 22 N·m (16 lb ft). Tighten M10 bolts to a torque of 44 N·m (32 lb ft). Secure harness assembly (9) to tube assembly (8).

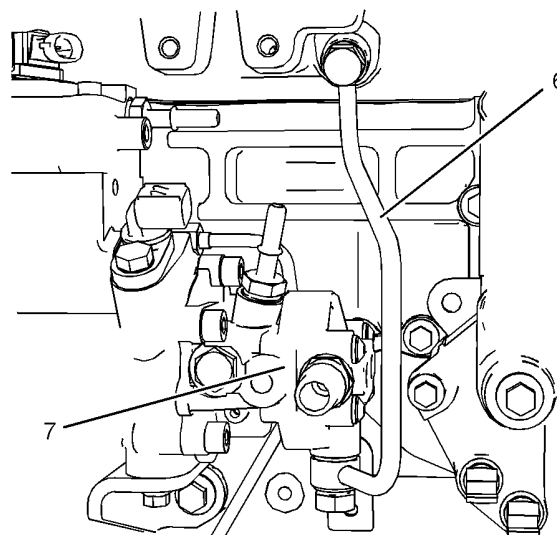


Illustration 230 g01249474

Typical example

17. Follow Step 17.a through Step 17.c in order to install tube assembly (6) for the fuel return.
 - a. Install the banjo bolts and new sealing washers to tube assembly (6).

b. Install tube assembly (6) to the cylinder head and to transfer pump (7).

c. Tighten the banjo bolts to a torque of 21 N·m (15 lb ft).

18. If necessary, install the electronic sensors to the cylinder head. Refer to Disassembly and Assembly, "Coolant Temperature Sensor - Remove and Install". Refer to Disassembly and Assembly, "Air Temperature Sensor - Remove and Install". Refer to Disassembly and Assembly, "Boost Pressure Sensor - Remove and Install".

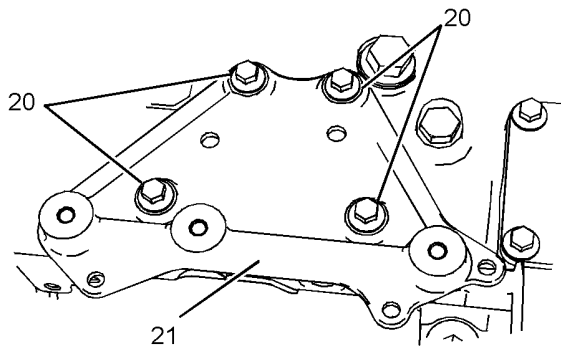


Illustration 231

g01763173

Typical example

19. If necessary, install mounting bracket (21) and install screws (20) to the cylinder head. Tighten the screws to a torque of 22 N·m (16 lb ft).

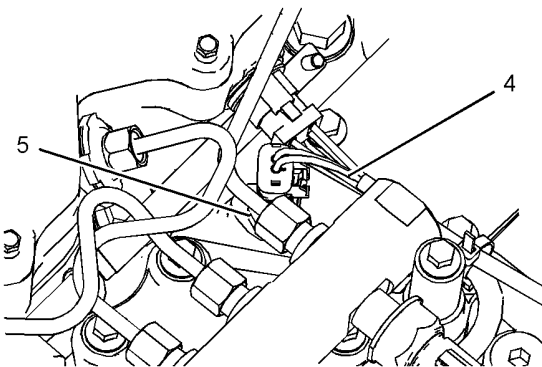


Illustration 232

g01249835

Typical example

20. Follow Step 20.a and Step 20.b in order to connect harness assembly (4) to inlet air temperature sensor (5).

- a. Connect harness assembly (4) to inlet air temperature sensor (5).
- b. Slide the locking tab into the locked position.

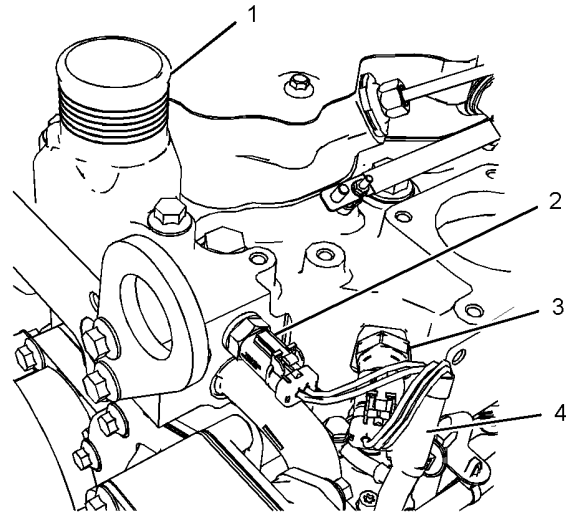


Illustration 233

g01245537

Typical example

21. If necessary, install water temperature regulator housing (1) to the cylinder head. Refer to Disassembly and Assembly, "Water Temperature Regulator Housing - Remove and Install".

22. Connect the upper radiator hose to water temperature regulator housing (1). Tighten the hose clip securely.

23. Follow Step 23.a and Step 23.b in order to connect harness assembly (4) to boost pressure sensor (3).

- a. Connect harness assembly (4) to boost pressure sensor (3).
- b. Slide the locking tab into the locked position.

24. Follow Step 24.a and Step 24.b in order to connect harness assembly (4) to coolant temperature sensor (2).

- a. Connect harness assembly (4) to coolant temperature sensor (2).
- b. Slide the locking tab into the locked position.

25. Use new cable straps in order to secure the harness assembly to the cylinder head. Ensure that the harness assembly is not strained.

Note: Ensure that the harness assembly is clear of other engine components.

26. Install the mounting bracket for the electronic control module. Refer to Disassembly and Assembly, "ECM Mounting Bracket - Remove and Install".

27. Install the glow plugs. Refer to Disassembly and Assembly, "Glow Plugs - Remove and Install".
28. Install the valve mechanism cover base. Refer to Disassembly and Assembly, "Valve Mechanism Cover Base - Remove and Install".
29. Install the electronic unit injectors. Refer to Disassembly and Assembly, "Electronic Unit Injector - Install".
30. Install the fuel manifold. Refer to Disassembly and Assembly, "Fuel Manifold (Rail) - Remove and Install".
31. Install the exhaust manifold. Refer to Disassembly and Assembly, "Exhaust Manifold - Remove and Install".
32. If necessary, install the fuel filter base and the secondary fuel filter. Refer to Disassembly and Assembly, "Fuel Filter Base - Remove and Install".
33. If necessary, install the fuel priming pump and the primary fuel filter. Refer to Disassembly and Assembly, "Fuel Priming Pump - Remove and Install".
34. If the alternator bracket is mounted on the cylinder head, install the alternator. Refer to Disassembly and Assembly, "Alternator - Install".
35. If necessary, install the air hose to the inlet connection.
36. Fill the cooling system with coolant. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct filling procedure.
37. If necessary, fill the engine oil pan to the correct level that is indicated on the engine oil level gauge. Refer to Operation and Maintenance Manual, "Engine Oil Level - Check".

i02933662

Lifter Group - Remove and Install

Removal Procedure

Table 55

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825576	Crankshaft Turning Tool	1
B	-	Telescopic Magnet	1

Start By:

- a. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".
- b. Remove the camshaft. Refer to Disassembly and Assembly, "Camshaft - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. If the crankshaft is installed, use Tooling (A) to rotate the crankshaft in order to gain access to the lifters.

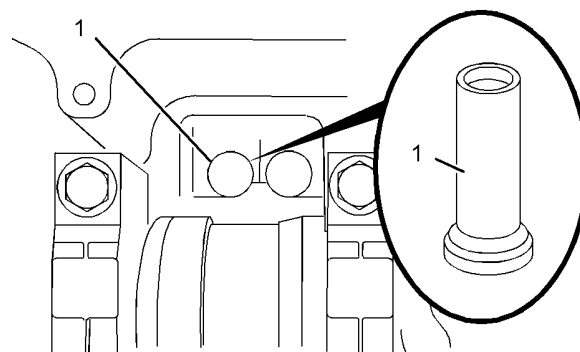


Illustration 234

g01476632

Typical example

2. Use Tooling (B) in order to remove lifters (1).

Note: Place a temporary identification mark on each lifter in order to identify the correct location.

3. Repeat Step 1 through Step 2 in order to remove the remaining lifters.

Installation Procedure

Table 56

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825576	Crankshaft Turning Tool	1
B	-	Telescopic Magnet	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

It is strongly recommended that all lifters should be replaced when a new camshaft is installed.

1. Clean the lifters. Follow Step 1.a through Step 1.c in order to inspect the lifters. Replace lifters that are worn or damaged.
 - a. Inspect the seat of the pushrod in the lifter for visual wear or damage.
 - b. Inspect the shank of the lifter for wear or damage. Refer to Specifications, "Lifter Group" for more information.
 - c. Inspect the face of the lifter that runs on the camshaft for visual wear or damage.
2. If the crankshaft is installed, use Tooling (A) to rotate the crankshaft. Rotate the crankshaft to access to the cylinder block in order to install lifters (1).
3. Lubricate lifters (1) with clean engine oil.

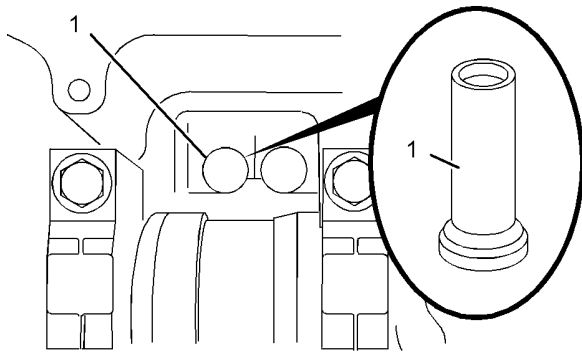


Illustration 235

g01476632

Typical example

4. Use Tooling (B) to install lifters (1) to the cylinder block. Ensure that used lifters are installed in the correct location.

Note: The lifters should be free to rotate.

5. Repeat Step 1 through Step 4 in order to install the remaining lifters.

End By:

- a. Install the camshaft. Refer to Disassembly and Assembly, "Camshaft - Remove and Install".
- b. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

i02933593

Camshaft - Remove and Install

Removal Procedure

Start By:

- a. Remove the rocker shaft and pushrods. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Remove".
- b. Remove the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. The engine should be mounted on a suitable stand and placed in the inverted position.

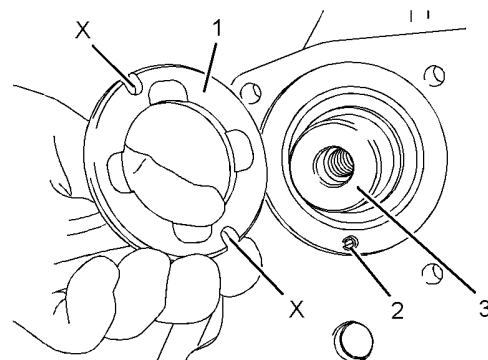


Illustration 236

g01266056

Typical example

2. Remove thrust washer (1) from the cylinder block. Do not remove dowel (2) from the cylinder block unless the dowel is damaged.

Note: The thrust washer can have one or two Slots (X).

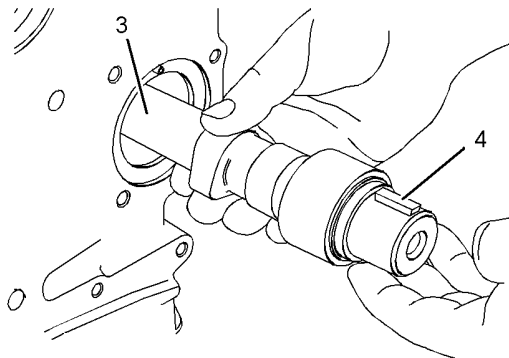


Illustration 237

g01266057

NOTICE

Do not damage the lobes or the bearings when the camshaft is removed or installed.

3. Carefully remove camshaft (3) from the cylinder block.
4. Do not remove key (4) from camshaft (3) unless the key is damaged.

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Clean the camshaft and the thrust washer. Inspect the camshaft and the thrust washer for wear and for damage. Refer to Specifications, "Camshaft" for more information. Replace any components that are worn or damaged.
2. Clean the camshaft bearing in the cylinder block. Inspect the camshaft bearing for wear and for damage. Refer to Specifications, "Camshaft Bearings" for more information. If necessary, replace the camshaft bearing. Refer to Disassembly and Assembly, "Camshaft Bearings - Remove and Install".

NOTICE

It is strongly recommended that all lifters should be replaced when a new camshaft is installed.

3. Inspect the lifters for wear and for damage. Refer to Specifications, "Lifter Group" for more information. Replace any worn lifters or any damaged lifters. Refer to Disassembly and Assembly, "Lifter Group - Remove and install".

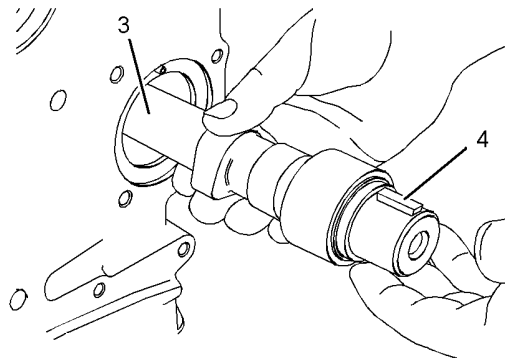


Illustration 238

g01266057

4. If necessary, install a new key (4) to camshaft (3).
5. Lubricate the bearing surfaces of camshaft (3) and lubricate the lobes of the camshaft with clean engine oil.

NOTICE

Do not damage the lobes or the bearings when the camshaft is removed or installed.

6. Carefully install camshaft (3) into the cylinder block.

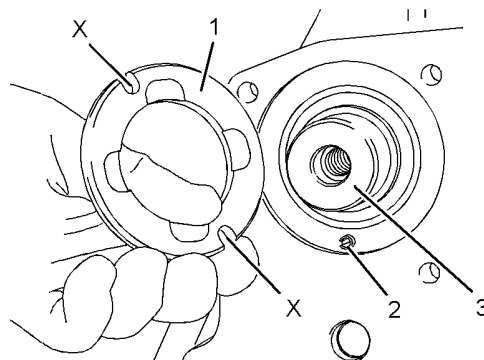


Illustration 239

g01266056

Typical example

7. Lubricate the thrust washer with clean engine oil. Align Slot (X) in thrust washer (1) with dowel (2) in the cylinder block. Install thrust washer (1) into the recess in the cylinder block.

Note: The thrust washer can have one or two slots.

End By:

- a. Install the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Install".
- b. Install the rocker shaft and pushrods. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Install".

i02933595

Camshaft Gear - Remove and Install

Removal Procedure

Table 57

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1

(1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".
- Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

Note: Either Tooling (A) can be used. Use the tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

- Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".

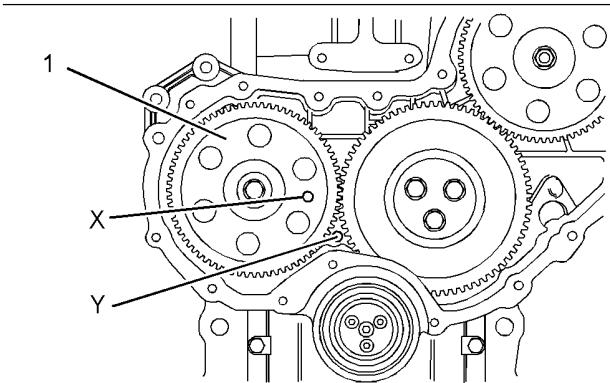


Illustration 240

g01476661

Typical example

- Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing. Use Tooling (B) in order to lock the camshaft in the correct position.
- Install Tooling (C) into Hole (Y) in the front housing. Use Tooling (C) in order to lock the crankshaft in the correct position.

Note: Do not use excessive force to install Tooling (C). Do not use Tooling (C) to hold the crankshaft during repairs.

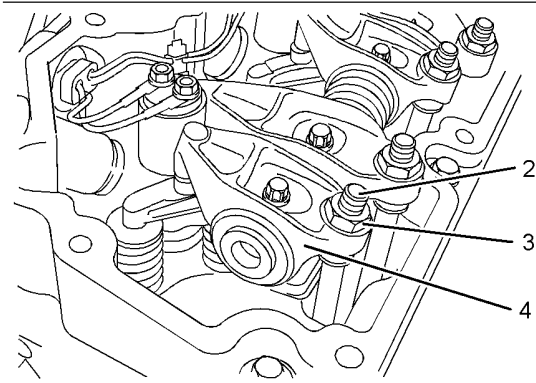


Illustration 241

g01476663

Typical example

- Loosen nuts (3) on ALL rocker arms (4). Unscrew adjusters (2) on all rocker arms (4) until all valves are fully closed.

Note: Failure to ensure that all adjusters are fully unscrewed can result in contact between the valves and pistons.

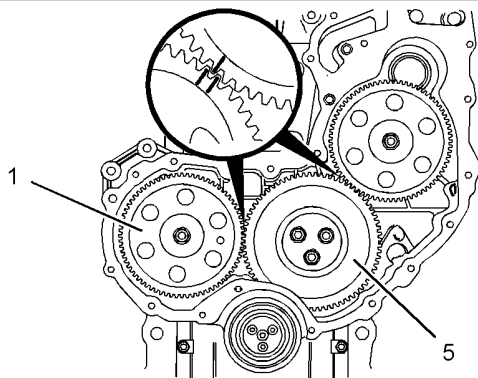


Illustration 242
Alignment of timing marks

5. Mark gear (1) and gear (5) in order to show alignment. Refer to Illustration 242.

Note: Identification will ensure that the gears can be installed in the original alignment.

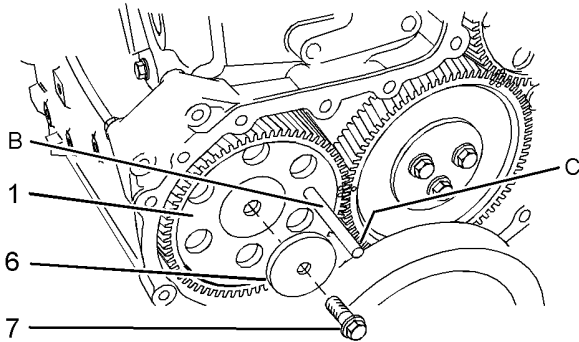


Illustration 243
Typical example

6. Remove Tooling (B) and Tooling (C) (not Shown). Remove bolt (7) and washer (6) from camshaft gear (1).

7. Remove camshaft gear (1) from the camshaft.

Note: If the camshaft gear is a tight fit on the nose of the camshaft, use a prybar in order to remove the camshaft gear.

8. If necessary, remove the key from the nose of the camshaft.

Installation Procedure

Table 58

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610212	Camshaft Timing Pin	1
C	27610211	Crankshaft Timing Pin	1
D	21825617	Dial Indicator Group	1
	-	Finger Clock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

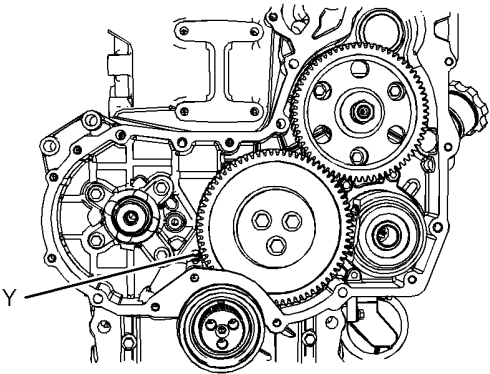


Illustration 244
Typical example

2. Install Tooling (C) into Hole (Y) in the cylinder block. Use Tooling (C) in order to lock the crankshaft in the correct position.

3. Ensure that the camshaft gear and the key are clean and free from wear or damage.

4. If necessary, install the key into the nose of the camshaft.

Note: Ensure that the key is squarely seated.

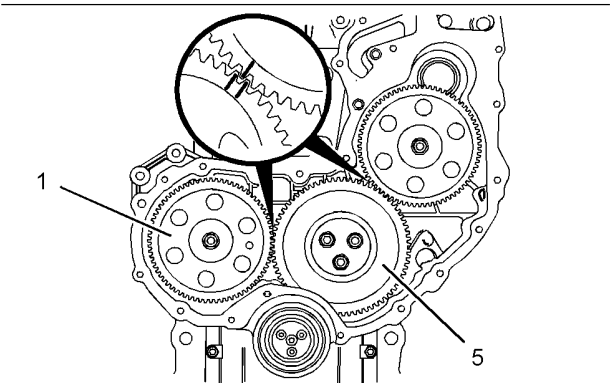


Illustration 245
Alignment of timing marks

5. Align the keyway in camshaft gear (1) with the key in the camshaft. Install the camshaft gear onto the camshaft. Ensure that the timing marks on gear (1) and gear (5) are in alignment and that the mesh of the gears is correct. Refer to Illustration 245.

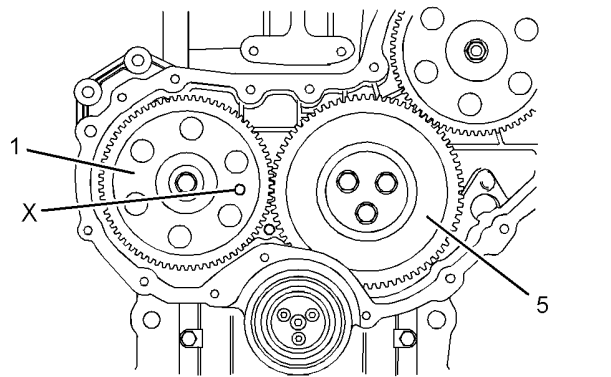


Illustration 246
Typical example

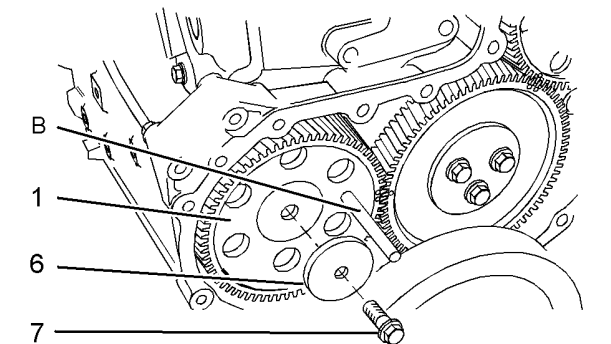


Illustration 247
Typical example

6. Install Tooling (B) through Hole (X) in camshaft gear (1) into the front housing.
7. Install washer (6) and bolt (7) to the camshaft gear.

8. Remove Tooling (B) and (C) (not shown).
9. Tighten bolt (7) to a torque of 95 N·m (70 lb ft).
10. Use Tooling (D) to check the backlash for gear (1) and gear (5). Ensure that the backlash for the gears is within specified values. Refer to Specifications, "Gear Group (Front)" for further information.
11. Use Tooling (D) to check the end play for camshaft gear (1). Ensure that the end play is within specified values. Refer to Specifications, "Camshaft" for further information.
12. Lubricate the teeth of the gears with clean engine oil.
13. Adjust the valve lash. Refer to Systems Operation, Testing and Adjusting, "Engine Valve Lash - Inspect/Adjust".

End By:

- a. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".
- b. Install the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".

i02933594

Camshaft Bearings - Remove and Install

Removal Procedure

Table 59

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610275	Bearing Puller	1

Start By:

- a. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove".
- b. Remove the camshaft. Refer to Disassembly and Assembly, "Camshaft - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

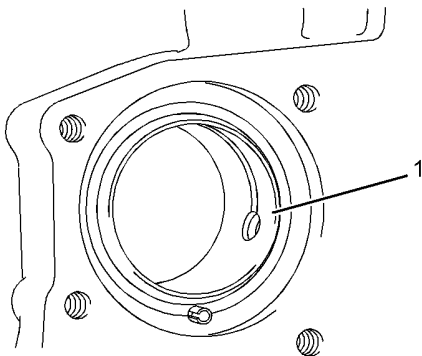


Illustration 248

g01270437

1. Inspect camshaft bearing (1). Refer to Specifications, "Camshaft Bearings" for more information.
2. If camshaft bearing (1) is worn or damaged use Tooling (A) in order to remove the camshaft bearing from the cylinder block.

Note: Remove the camshaft bearing from the front of the cylinder block.

Installation Procedure

Table 60

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610275	Bearing Puller	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Clean the bearing housing in the cylinder block. Ensure that the oil holes in the bearing housing are free from debris.

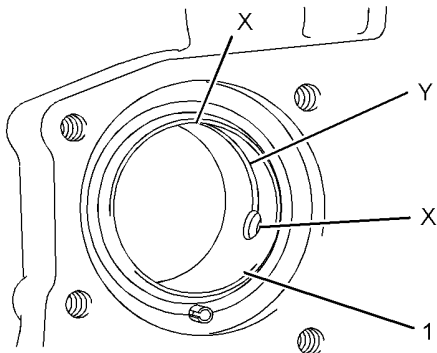


Illustration 249

g01266512

2. Lubricate the bearing housing in the cylinder block with clean engine oil.
3. Accurately align the two oil Holes (X) in camshaft bearing (1) with the two oil holes in the cylinder block.

Note: The Groove (Y) in the camshaft bearing must be to the top of the cylinder block.

4. Use Tooling (A) in order to install camshaft bearing (1) into the cylinder block. Install the camshaft bearing so that the front edge of the bearing is flush with the face of the recess in the cylinder block.

Note: Ensure that all oil holes are correctly aligned. If the oils are not correctly aligned, the camshaft bearing should be removed.

End By:

- a. Install the camshaft. Refer to Disassembly and Assembly, "Camshaft - Remove and Install".
- b. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Install".

i02933623

Engine Oil Pan - Remove and Install (Aluminum and Pressed Steel Oil Pans)

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

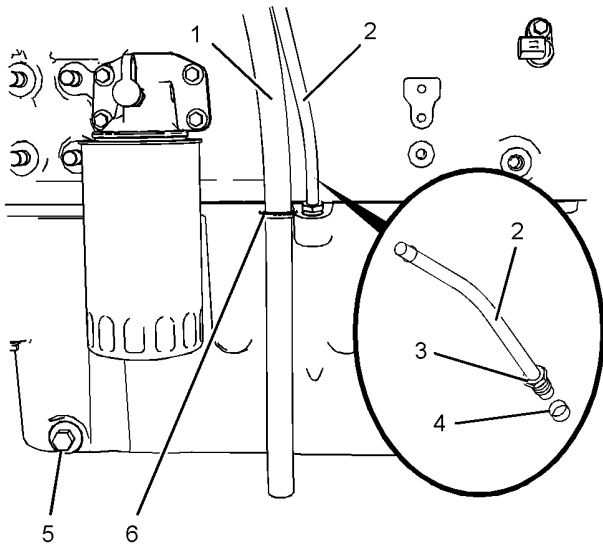


Illustration 250

Typical example

g01478088

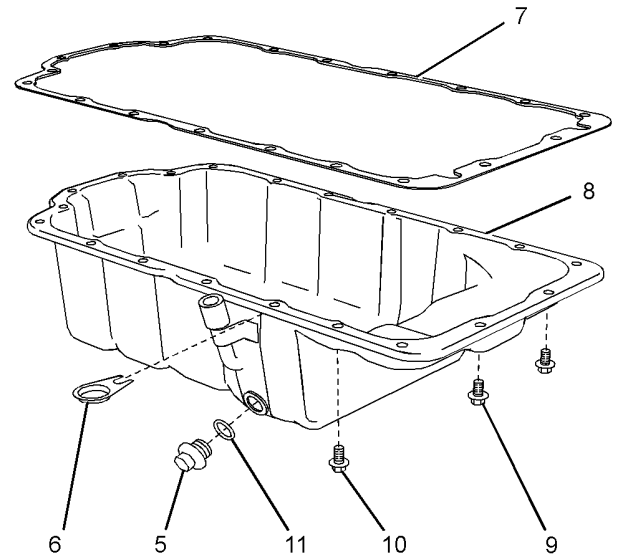


Illustration 251

Typical example

g01797036

1. Place a suitable container below the engine oil pan. Remove drain plug (5) and drain the engine lubricating oil. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.
 2. Remove O-ring seal (11) from drain plug (5).
 3. Disconnect breather hose (1) from clip (6). Position the breather hose away from the engine oil pan.
 4. If necessary, remove the assembly of the dipstick tube. Loosen nut (3) and remove tube assembly (2). Remove seal (4) from the tube assembly.
- Note:** Identify the position and orientation of the tube assembly.
5. Support the assembly of the engine oil pan. Mark the position of clip (6). Loosen bolts (9) and bolts (10). Remove the clip and remove the bolts.
 6. Remove engine oil pan (8) and remove gasket (7) from the cylinder block.

Installation Procedure

Table 61

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Guide Bolt M8 by 100 mm	4
B	21826038	POWERPART Silicon Rubber Sealant	1
C	21820117	POWERPART Threadlock and NutLock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the face of the cylinder block is clean and free from damage.

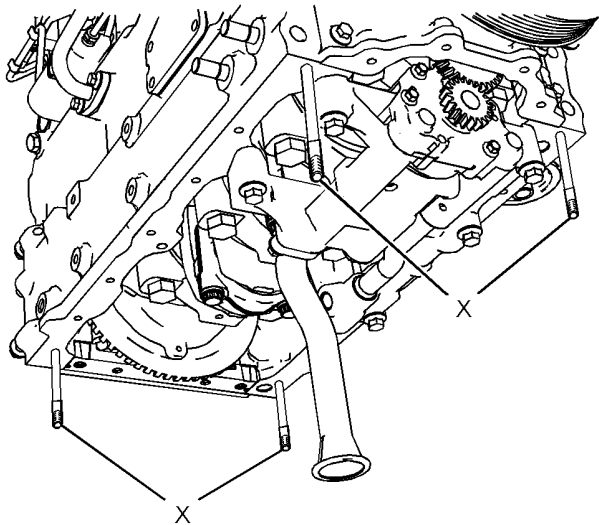


Illustration 252

g01251768

Typical example

2. Install Tooling (A) to Positions (X) in the cylinder block.
3. Ensure that the engine oil pan is clean and free from damage.

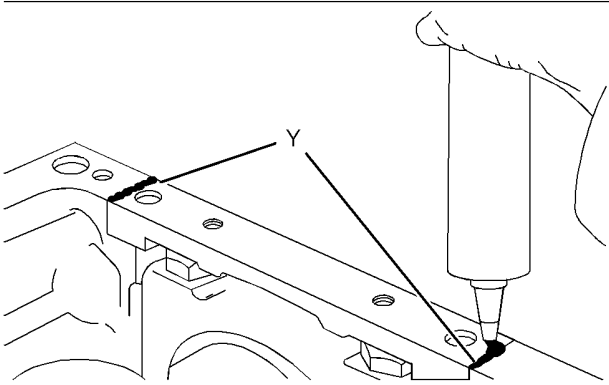


Illustration 253

g01251763

Typical example

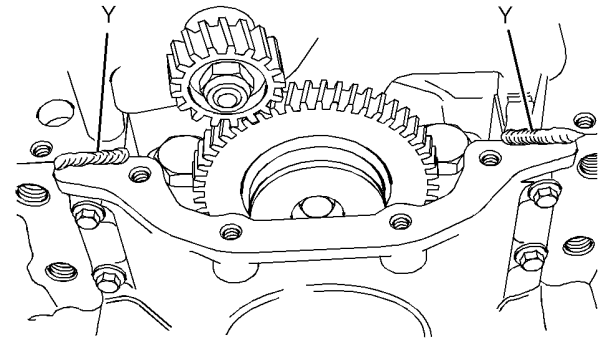


Illustration 254

g01803754

Typical example

4. Apply a bead of Tooling (B) to Positions (Y) on the cylinder block.

Note: If the bridge piece for the cylinder block has just been installed, the engine oil pan must be installed before Tooling (B) has cured.

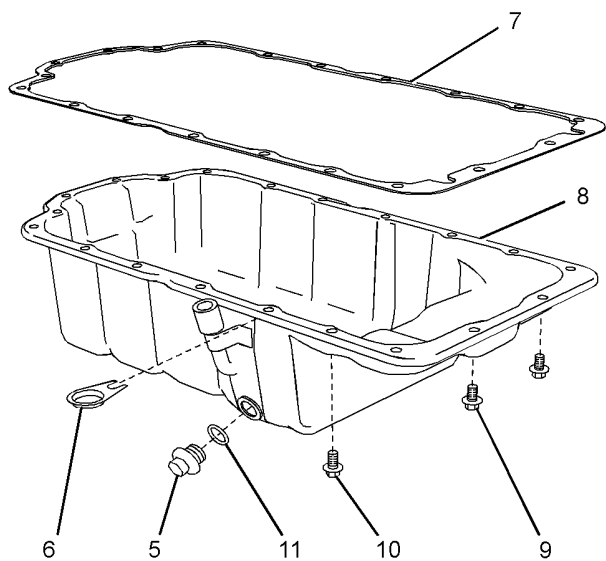


Illustration 255

g01797036

Typical example

5. Position a new gasket (7) onto engine oil pan (8).
6. Align the assembly of the engine oil pan with Tooling (A). Install the assembly of the engine oil pan to the cylinder block. Install clip (6) in the correct position.
7. Install bolts (10) finger tight.
8. Remove Tooling (A).
9. Apply Tooling (C) to bolts (9).
10. Install bolts (9) and the remaining bolts (10).
11. Tighten bolts (9) and bolts (10) to a torque of 22 N·m (16 lb ft). Refer to Specifications, "Engine Oil Pan" for the correct tightening sequence.

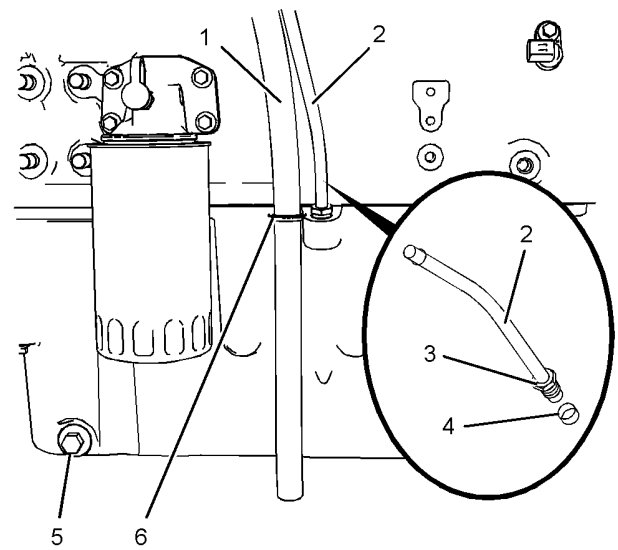


Illustration 256

g01478088

Typical example

12. Install a new O-ring seal to drain plug (5). Install the drain plug to the engine oil pan. Tighten the oil drain plug to a torque of 34 N·m (25 lb ft).
13. If necessary, follow Step 13.a through Step 13.c in order to install the assembly of the dipstick tube.
 - a. Install a new seal (4) to tube assembly (2).
 - b. Apply Tooling (C) to nut (3). Install the tube assembly to the engine oil pan.
- Note:** Ensure that the orientation of the tube assembly is correct.
- c. Tighten nut (3) to a torque of 18 N·m (13 lb ft). Install the dipstick.
14. Fill the engine oil pan to the correct level. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.

i02933622

Engine Oil Pan - Remove and Install (Cast Iron Oil Pan)

Removal Procedure

Note: In order to remove a cast iron oil pan, the engine must be removed from the machine.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Ensure that the engine lubricating oil is drained. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.
2. The engine should be mounted in a suitable stand and placed in the inverted position.

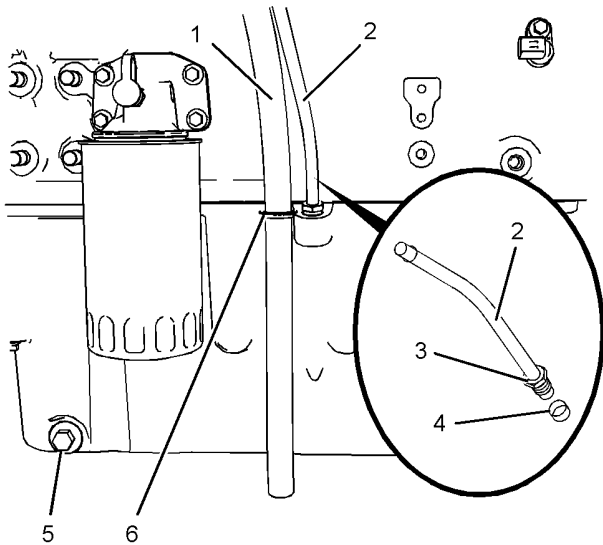


Illustration 257
Typical example

3. Disconnect breather hose (1) from clip (6). Position the breather hose away from the engine oil pan.

Note: Identify the position and orientation of the tube assembly before removal.

4. Remove the assembly of the dipstick tube. Loosen nut (3) and remove tube assembly (2). Remove seal (4) from the tube assembly.

5. Mark the position of clip (6). Refer to Illustration 257. Loosen the bolt that secures the clip and remove the clip.

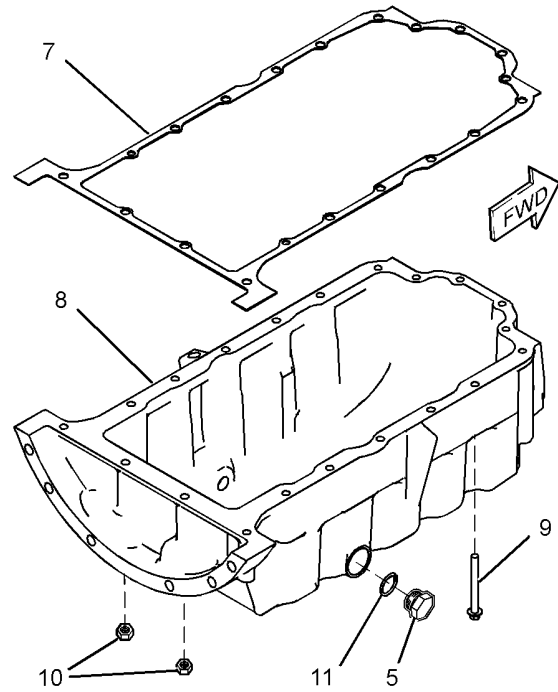


Illustration 258
Typical example

6. Remove nuts (10) and bolts (9).

Note: The bolts are different lengths. Note the position of the different bolts.

7. Attach a suitable lifting device to engine oil pan (8). Support the weight of the engine oil pan. The engine oil pan weighs approximately 41 kg (90 lb).
8. Use the lifting device to remove engine oil pan (8) from the cylinder block.
9. Remove gasket (7) from the cylinder block.
10. If necessary, remove drain plug (5). Remove O-ring seal (11) from oil drain plug (5).

Installation Procedure

Table 62

Required Tools			
Tool	Part Number	Part Description	Qty
A	21826038	POWERPART Silicon Rubber Sealant	-
B	21820117	POWERPART Threadlock and NutLock	-
C	-	Straight Edge	1

Note: In order to install a cast iron oil pan, the engine must be removed from the machine.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the face of the cylinder block is clean and free from damage. Inspect the studs in the cylinder block for damage. If necessary, replace the studs.
2. Ensure that the engine oil pan is clean and free from damage.

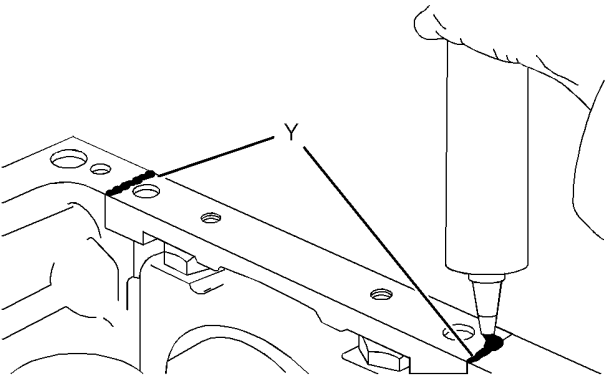


Illustration 259

Typical example

g01251763

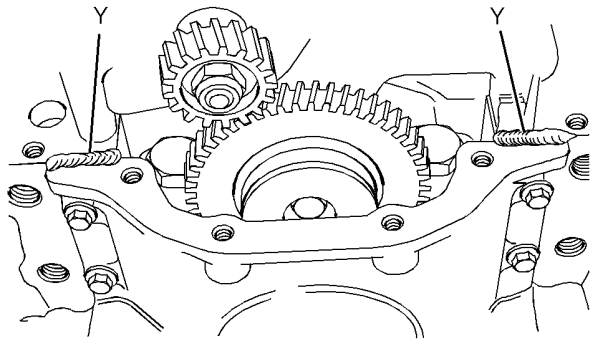


Illustration 260

Typical example

g01803754

3. Apply a bead of Tooling (A) to Positions (Y) on the cylinder block.

Note: If the bridge piece for the cylinder block has just been installed, the engine oil pan must be installed before Tooling (A) has cured.

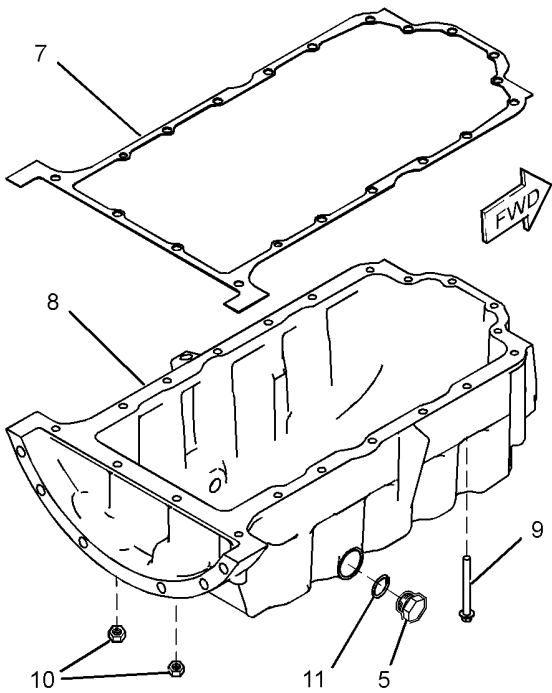


Illustration 261

Typical example

g01251978

4. Align a new gasket (7) with the studs in the cylinder block. Install the gasket to the cylinder block.
5. Attach a suitable lifting device to engine oil pan (8). The engine oil pan weighs approximately 41 kg (90 lb).

6. Use the lifting device to align engine oil pan (8) with the studs in the cylinder block. Install the engine oil pan to the cylinder block. Remove the lifting device from the engine oil pan.
7. Install bolts (9) and nuts (10) finger tight. Install clip (6).

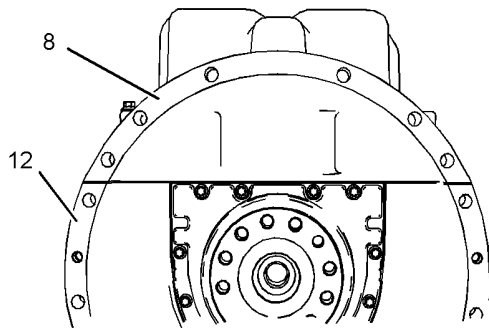


Illustration 262

g01251982

Typical example

8. Align the rear face of engine oil pan (8) to the rear face of cylinder block (12). Use Tooling (C) and a feeler gauge in order to check the alignment between the engine oil pan and the cylinder block. The maximum step that is allowed between the cylinder block and the sump is 0.1 mm (0.004 inch).
9. Tighten bolts (9) and nuts (10) to a torque of 22 N·m (16 lb ft). Refer to Specifications, "Engine Oil Pan" for the correct tightening sequence.

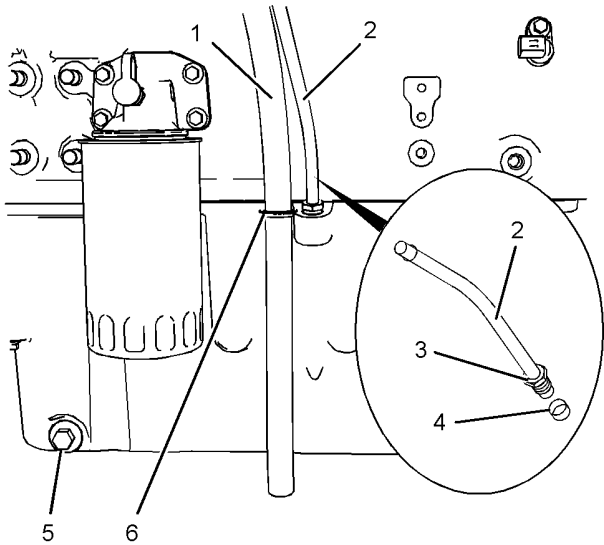


Illustration 263

g01251772

Typical example

10. If necessary, install a new O-ring seal to drain plug (5). Install drain plug (5) to engine oil pan (8). Tighten the drain plug to a torque of 34 N·m (25 lb ft).
 11. Follow Step 11.a through Step 11.c in order to install the assembly of the dipstick tube.
 - a. Install a new seal (4) to tube assembly (2).
 - b. Apply Tooling (B) to nut (3). Install the tube assembly to the engine oil pan.
- Note:** Ensure that the orientation of the tube assembly is correct.
- c. Tighten the nut to a torque of 18 N·m (13 lb ft). Install the dipstick .

12. Install breather hose (1) to clip (6).

Note: After the engine has been installed, ensure that the engine oil pan is filled with lubricating oil to the correct level. Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change" for the correct procedure.

i02933591

Balancer - Remove

Removal Procedure

Table 63

Required Tools			
Tool	Part Number	Part Description	Qty
A	21825576	Crankshaft Turning Tool	1
B	27610211	Crankshaft Timing Pin	1
C	27610225	Timing Pin (Balancer)	1
D	-	Puller (Two Leg)	1

Start By:

- a. Remove the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
- b. Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

Note: In order to remove the balancer, the engine must be removed from the machine. The engine should be mounted in a suitable stand and placed in the inverted position.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position.

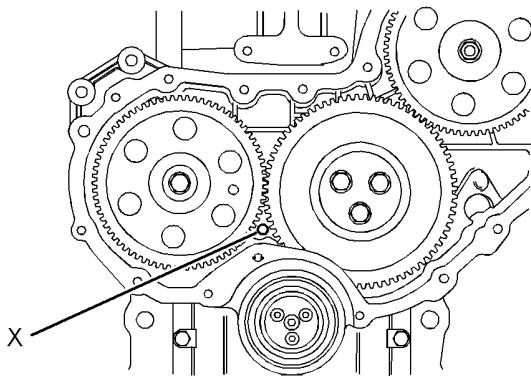


Illustration 264

g01259627

Typical example

2. Install Tooling (B) through Hole (X) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

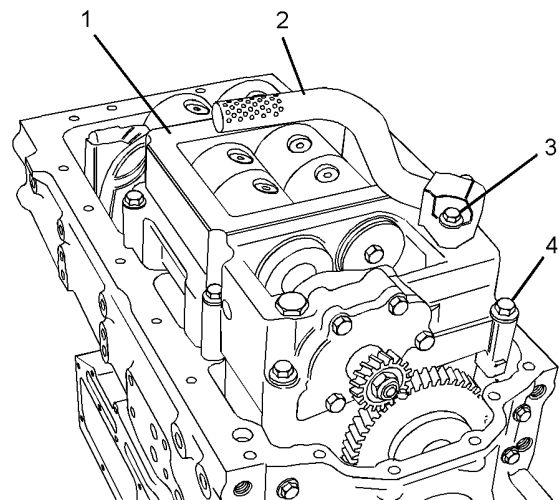


Illustration 265

g01259635

Typical example

3. Remove bolts (3) and suction pipe (2).
4. Remove the gasket from the suction pipe.

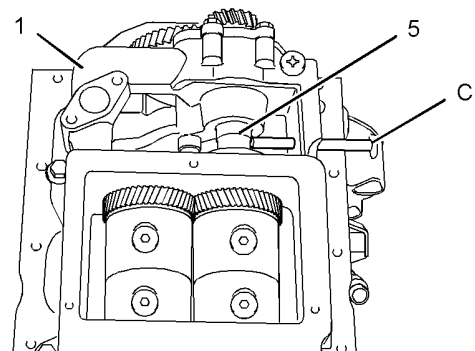


Illustration 266

g01252310

Typical example

5. Install Tooling (C) into balancer (1). Ensure that Tooling (C) is engaged into the hole in drive shaft (5).
6. Attach a suitable lifting device to balancer (1). Support the weight of the balancer. The balancer weighs approximately 23 kg (51 lb).
7. Remove bolts (4). Use the lifting device to remove the balancer.

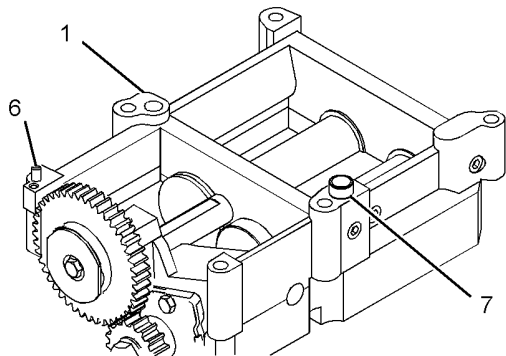


Illustration 267 g01259636

8. Do not remove dowel (6) and dowel (7) unless the dowels are damaged.

Note: The balancer unit is not a serviceable item. The engine oil pump and the engine oil relief valve are the only serviceable parts of the balancer.

Disassembly Procedure

1. Remove the engine oil relief valve. Refer to Disassembly and Assembly, "Engine Oil Relief Valve - Remove and Install".

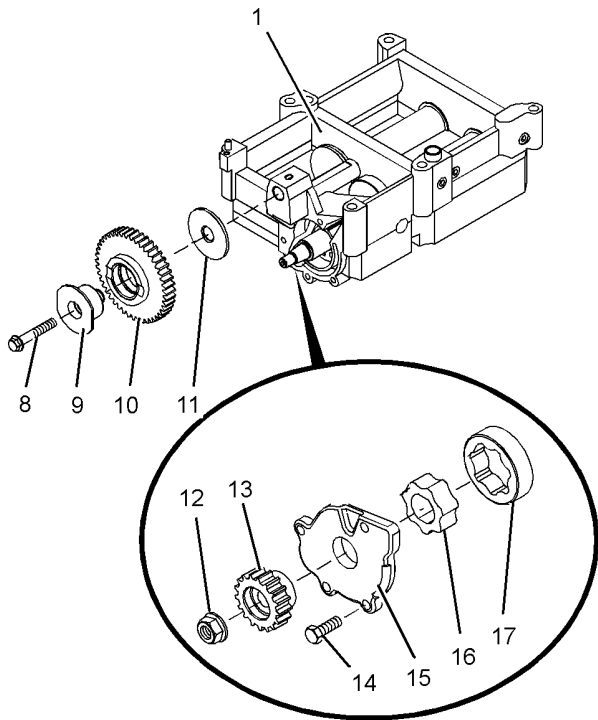


Illustration 268 g01478152
Typical example

2. Remove bolt (8) and hub (9). Remove idler gear (10) and thrust washer (11).

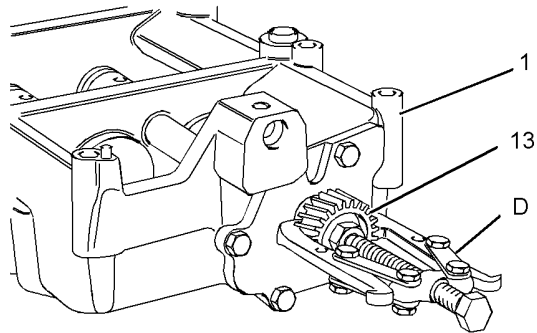


Illustration 269 g01259631
Typical example

3. Remove nut (12). Use Tooling (D) in order to remove gear (13) from the shaft of the oil pump.

Note: Do not use a timing pin to lock the balancer in order to loosen nut (12).

4. Remove bolts (14) and remove front cover (15).

5. Remove outer rotor (17) and remove inner rotor (16).

Note: Mark the direction of rotation of the rotors.

i02933590

Balancer - Install

Assembly Procedure

Table 64

Required Tools			
Tool	Part Number	Part Description	Qty
E	21820117	POWERPART Threadlock and Nutlock	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components of the engine oil pump are clean and free from wear or damage.

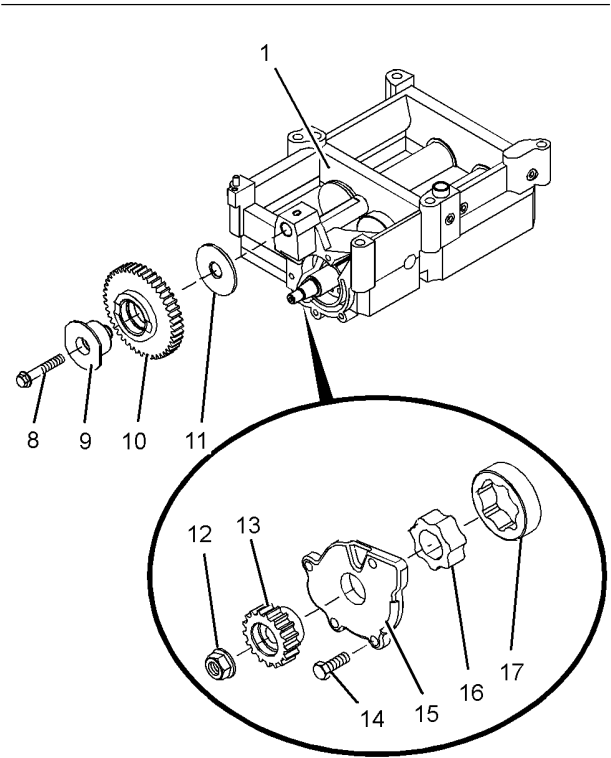


Illustration 270
Typical example

2. Install inner rotor (16) and install outer rotor (17). Used rotors should be installed in the original direction of rotation. Check the clearance between the outer rotor and the body of the oil pump. Check the clearance between the inner rotor and the outer rotor. Check the end play of the rotor assembly. Refer to Specifications, "Engine Oil Pump" for more information.
 3. Lubricate the assembly of the oil pump with clean engine oil. Install front cover (15). Install bolts (14). Tighten the bolts to a torque of 26 N·m (19 lb ft).
 4. Ensure that the shaft of the oil pump is clean and dry. Position gear (13) onto the shaft. Install nut (12). Tighten the nut to a torque of 95 N·m (70 lb ft).
- Note:** Do not use a timing pin to lock the balancer in order to tighten nut (12).
5. Lubricate hub (9), thrust washer (11) and the bush of idler gear (10) with clean engine oil. Install hub (9) and thrust washer (11) to idler gear (10).
- Note:** Ensure the correct orientation of the idler gear.
6. Install the assembly of the idler gear to balancer (1).

7. Ensure that the threads of bolt (8) are clean and dry. Apply Tooling (E) to the threads of the bolt. Install bolt (8). Tighten the bolt to a torque of 26 N·m (19 lb ft).
8. Check the end play of idler gear (10). Refer to Specifications, "Engine Oil Pump".
9. Install the engine oil relief valve . Refer to Disassembly and Assembly, "Engine Oil Relief Valve - Remove and Install" for further information.

Installation Procedure

Table 65

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610211	Crankshaft Timing Pin	1
C	27610225	Timing Pin (Balancer)	1
F	21825617	Dial Indicator Group	1
	-	Finger Clock	1
G	-	Guide Studs (M10 by 75 mm)	1

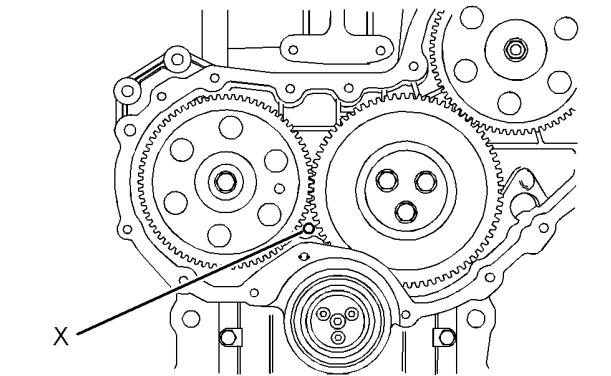


Illustration 271

1. Ensure that No. 1 piston is at the top center position and that Tooling (B) is installed to Position (X) in the front housing.
2. Clean the faces of the cylinder block.

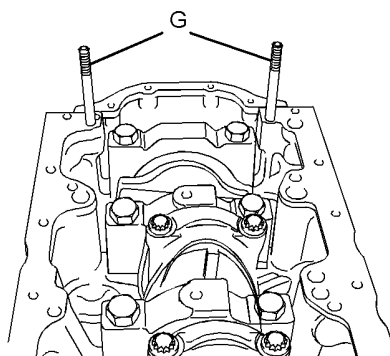


Illustration 272

g01252312

3. Install Tooling (G) to the cylinder block.

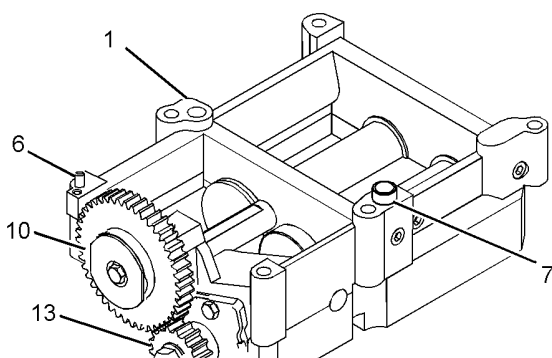


Illustration 273

g01260306

4. Ensure that dowel (6) and dowel (7) are seated in the housing of balancer (1).

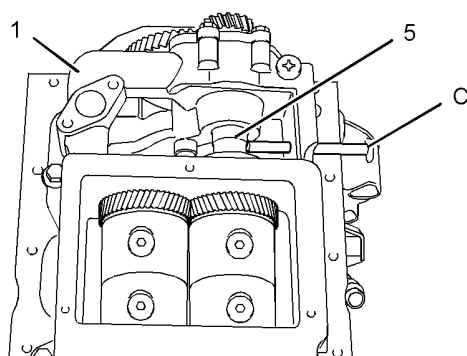


Illustration 274

g01252310

5. Install Tooling (C) to balancer (1). Ensure that Tooling (C) is engaged into shaft (5).
6. Attach a suitable lifting device to the balancer. The balancer weighs approximately 23 kg (51 lb).

7. Use the lifting device to align balancer (1) with Tooling (G). Install the balancer to the cylinder block. Ensure that dowels (6) and (7) are aligned with the holes in the cylinder block. Ensure that gear (10) and the crankshaft gear mesh. Remove the lifting device.

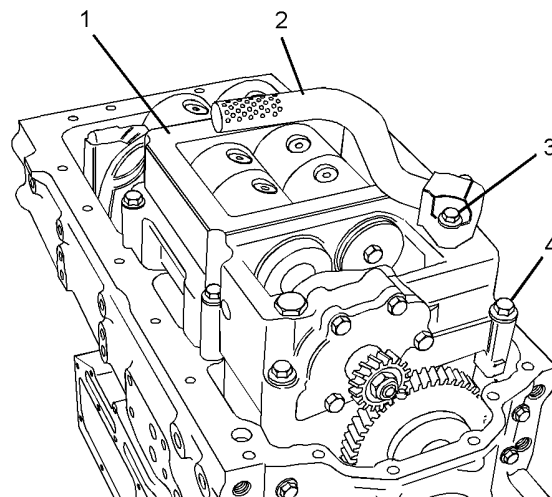


Illustration 275

g01259635

8. Install bolts (4) to balancer (1) finger tight.
9. Remove Tooling (G) and install remaining bolts (4). Tighten the bolts to a torque of 54 N·m (40 lb ft).
10. Remove Tooling (B) and Tooling (C).
11. Install suction pipe (2) and a new gasket to balancer (1).
12. Install bolts (3). Tighten the bolts to a torque to 22 N·m (16 lb ft).
13. Use Tooling (F) in order to check the backlash between gears (10) and (13). Refer to Illustration 273. Refer to Specifications, "Engine Oil Pump".
14. Use Tooling (F) in order to check the backlash between gear (10) and the crankshaft gear. Refer to Specifications, "Gear Group - Front" for further information.

End By:

- a. Install the engine oil pan. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
- b. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

i02933663

Piston Cooling Jets - Remove and Install

Removal Procedure

Table 66

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1

(1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, “Balancer - Remove”. If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, “Engine Oil Pump - Remove”.

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. If the crankshaft is installed, use Tooling (A) to rotate the crankshaft in order to gain access to the appropriate piston cooling jet.

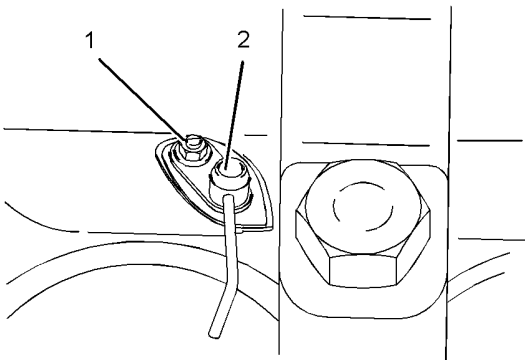


Illustration 276

g01265615

Typical example

2. Remove bolt (1) and piston cooling jet (2) from the cylinder block.

3. Repeat Step 1 and Step 2 for the remaining piston cooling jets.

Installation Procedure

Table 67

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1

(1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

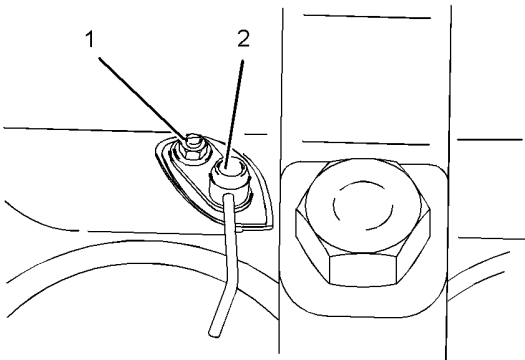


Illustration 277

g01265615

1. Clean the piston cooling jets and inspect the piston cooling jets for damage. Ensure that the valve is free to move within each piston cooling jet. Replace any damaged piston cooling jets.
2. If the crankshaft is installed, use Tooling (A) to rotate the crankshaft in order to access the mounting flange for the piston cooling jet.
3. Position piston cooling jet (2) in the cylinder block. Install bolt (1). Tighten the bolt to a torque of 9 N·m (80 lb in).
4. Repeat Step 2 and Step 3 for the remaining piston cooling jets.
5. If the cylinder head has been removed, It is possible to check the alignment of the piston cooling jets. Refer to Specifications, “Piston Cooling Jet Alignment” for more information.

Note: It is not possible to check the alignment of the piston cooling jets with the cylinder head in position.

End By:

- a. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Install".

i02933667

Pistons and Connecting Rods - Remove

Removal Procedure

Table 68

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610274	Ridge Reamer	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. Remove the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Remove".
- b. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".
- c. Remove the piston cooling jets. Refer to Disassembly and Assembly, "Piston Cooling Jets - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Use Tooling (A) to rotate the crankshaft until the crank pin is at the bottom center position.

2. Use Tooling (B) to remove the carbon ridge from the top inside surface of the cylinder bore.

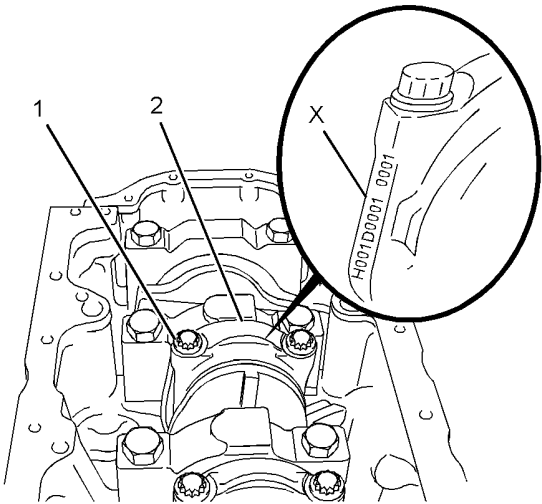


Illustration 278

g01479383

3. The connecting rod and the connecting rod cap should have an etched Number (X) on the side. The number on the connecting rod and the connecting rod cap must match. Ensure that the connecting rod and connecting rod cap (2) are marked for the correct location. If necessary, make a temporary mark on the connecting rod and the connecting rod cap in order to identify the cylinder number.

Note: Do not stamp the connecting rod assembly. Stamping or punching the connecting rod assembly could cause the connecting rod to fracture.

4. Remove bolts (1) and remove connecting rod cap (2) from the connecting rod.

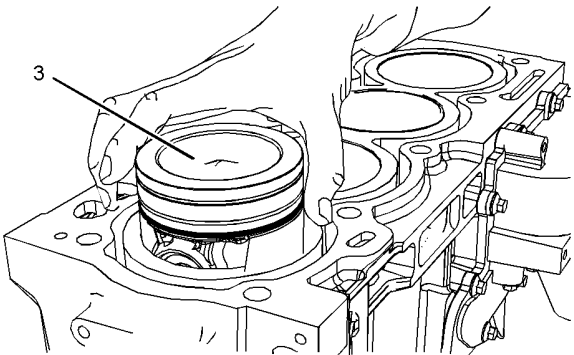


Illustration 279

g01479386

Typical example

5. Carefully push piston (3) and the connecting rod assembly out of the cylinder bore. Lift the piston out of the top of the cylinder block.

Note: Do not push on the fracture split surfaces of the connecting rod as damage may result.

6. Temporarily install connecting rod cap (2) and bolts (1) to the connecting rod when the assembly is out of the engine. Tighten bolts (1) to a torque of 20 N·m (14 lb ft).

Note: Fracture split connecting rods should not be left without the connecting rod caps installed. Ensure that the etched number on connecting rod cap matches the etched number on connecting rod. Ensure the correct orientation of the connecting rod cap.

7. Repeat Step 1 through Step 5 for the remaining pistons and connecting rods.

i02933665

Pistons and Connecting Rods - Disassemble

Disassembly Procedure

Table 69

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1
B	-	Piston Ring Expander	1

Start By:

- a. Remove the pistons and the connecting rods. Refer to Disassembly and Assembly, "Piston and Connecting Rods - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Make a temporary mark on the components of the piston and connecting rod assembly. This will ensure that the components of each piston and connecting rod assembly can be reinstalled in the original cylinder. Mark the underside of the piston on the front pin boss. Do not interchange components.

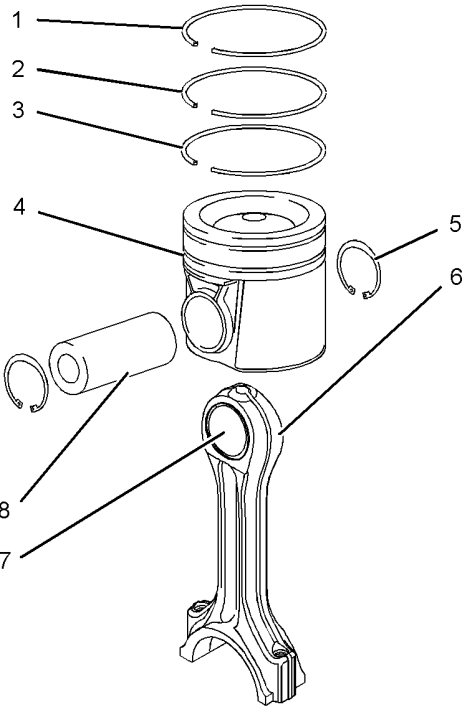


Illustration 280

g01244067

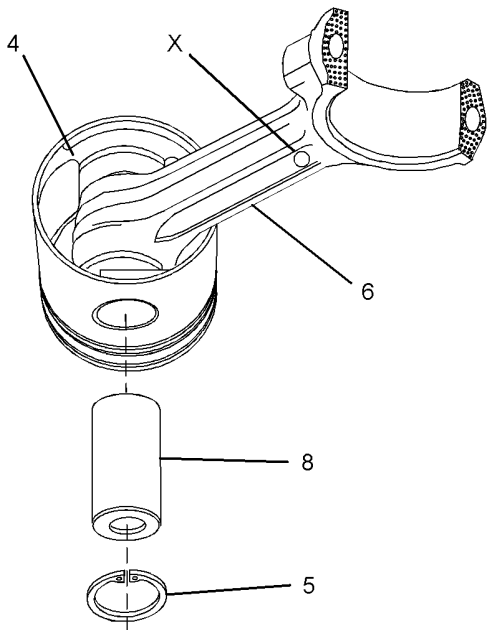


Illustration 281

g01253091

Typical example

2. Place the piston and connecting rod assembly on a suitable surface with the connecting rod upward. Use Tooling (A) in order to remove circlips (5).

Note: Forged Marks (X) identify the front of the connecting rod assembly. The forged marks should be used for the purposes of orientation.

3. Remove piston pin (8) and connecting rod (6) from piston (4).

Note: If the piston pin cannot be removed by hand, heat the piston to a temperature of $45 \pm 5^\circ\text{C}$ ($113 \pm 9^\circ\text{F}$). Do not use a torch to heat the piston. Note the orientation of the connecting rod and the piston.

4. Place the piston on a suitable surface with the crown upward. Use Tooling (B) in order to remove compression rings (1) and (2), and oil control ring (3) from piston (4).

Note: Identify the position and orientation of compression rings (1) and (2), and oil control ring (3).

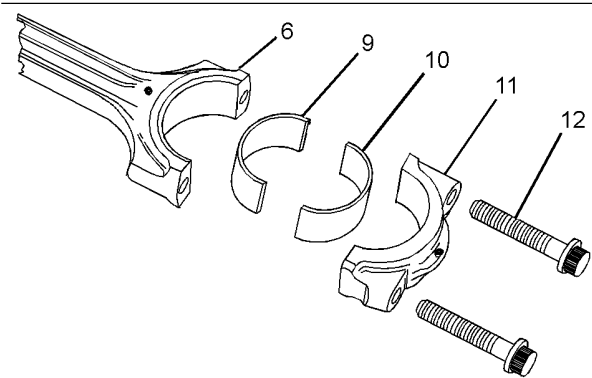


Illustration 282

g01244068

5. Remove bolts (12) and connecting rod cap (11) from connecting rod (6). Discard the bolts.

Note: Fracture split connecting rods should not be left without the connecting rod caps installed. After the disassembly procedure for the piston and connecting rod is completed, carry out the assembly procedure and the installation procedure as soon as possible. Refer to Disassembly and Assembly, "Piston and Connecting Rods - Assemble" and Disassembly and Assembly, "Piston and Connecting Rods - Install".

6. Remove the lower half of connecting rod bearing (10) from connecting rod cap (11). Remove the upper half of connecting rod bearing (9) from connecting rod (6). Keep the connecting rod bearings together.

NOTICE

Removal of the piston pin bushing in the connecting rod must be carried out by personnel with the correct training. Also special machinery is required. For more information refer to your authorized Perkins distributor.

7. Inspect the connecting rod for wear or damage. If necessary, replace connecting rod (6) or replace bush (7) for the piston pin.

Note: If the connecting rod or the bush for the piston pin are replaced, first identify the height grade of the connecting rod. Refer to Specifications, "Connecting Rods".

8. Repeat Step 1 through Step 7 in order to disassemble the remaining pistons and connecting rods.

i02933664

Pistons and Connecting Rods - Assemble

Assembly Procedure

Table 70

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Circlip Pliers	1
B	-	Piston Ring Expander	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components are clean and free from wear or damage. If necessary, replace any components that are worn or damaged.

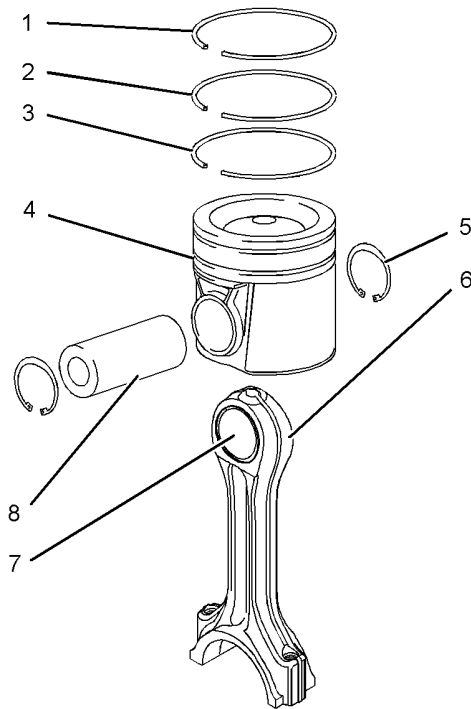


Illustration 283

g01244067

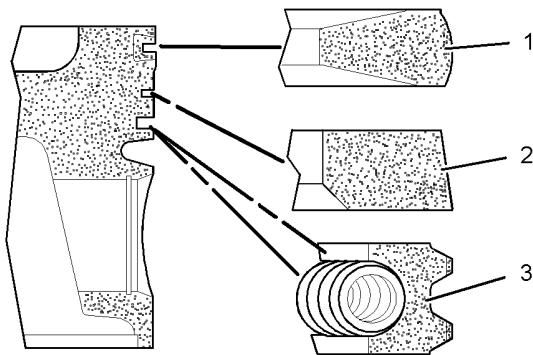


Illustration 284

g01155119

2. If the original piston is assembled, follow Step 2.a through Step 2.e in order to install the piston rings.

- a. Position the spring for oil control ring (3) into the oil ring groove in piston (4). The central wire must be located inside the end of the spring.
- b. Use Tooling (B) to install oil control ring (3) over the spring.

Note: Ensure that the central wire is 180 degrees from the ring gap.

- c. Use Tooling (B) to install intermediate compression ring (2) into the second groove in piston (4). The word "TOP" must be upward. The chamfer on the inner face must be downward.
- d. Use Tooling (B) to install top compression ring (1) into the top groove in piston (4). The word "TOP" must be upward.
- e. Position the piston ring gaps at 120 degrees away from each other.

Note: A new piston assembly is supplied with new piston rings.

NOTICE

Removal of the piston pin bushing in the connecting rod must be carried out by personnel with the correct training. Also special machinery is required. For more information refer to your authorized Perkins distributor.

3. If the connecting rod assembly or the bush for the piston pin have been replaced, ensure that the height grade of the connecting rod is correct. Refer to Specifications, "Connecting Rods" for further information.
4. Lubricate bush (7) and lubricate the bore for the piston pin in piston (4) with clean engine oil.

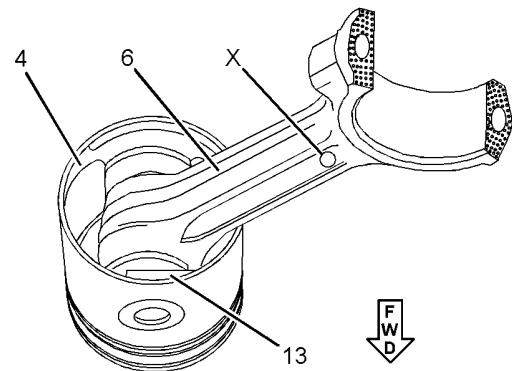


Illustration 285



g01244172

5. Place the piston on a suitable surface with the crown downward. Install connecting rod (6) and piston pin (8) to piston (4). Ensure that square boss (13) on the piston, and forged Mark (X) on the connecting rod are in the correct position. See illustration 285.

Note: If the piston pin cannot be installed by hand, heat the piston to a temperature of $45^{\circ} \pm 5^{\circ}\text{C}$ ($113^{\circ} \pm 9^{\circ}\text{F}$).

6. Use Tooling (A) in order to install circlips (5) to the piston pin bore in piston (4).

Note: Ensure that the circlips are seated in the grooves in the piston.

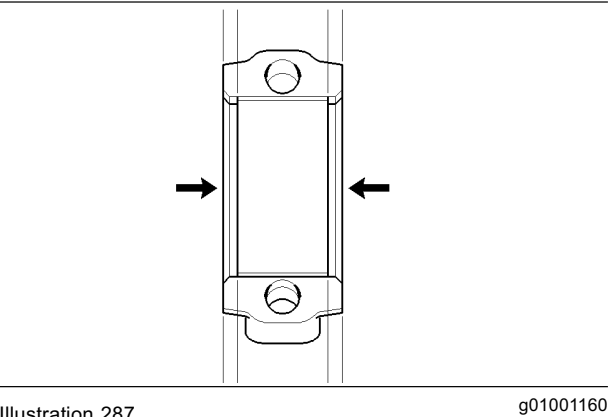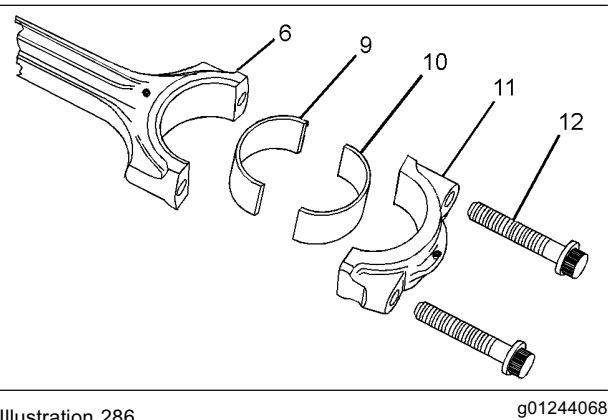

Aligning the connecting rod bearing in the center of the connecting rod

7. Install the upper half of connecting rod bearing (9) to connecting rod (6). Ensure that the connecting rod bearing is centralized in the connecting rod. Refer to Illustration 287.

Note: New connecting rod bearings are supplied with an alignment tool. If new connecting rod bearings are installed, use the tool to align the connecting rod bearing in the connecting rod.

8. Install the lower half of connecting rod bearing (10) to connecting rod cap (11). Ensure that the connecting rod bearing is centralized in the connecting rod cap. Refer to Illustration 287.

Note: New connecting rod bearings are supplied with an alignment tool. If new connecting rod bearings are installed, use the tool to align the connecting rod bearing in the connecting rod cap.

9. Repeat Step 2 through Step 8 for the remaining piston and connecting rod assemblies.

Note: Fracture split connecting rods should not be left without the connecting rod caps installed. After the assembly procedure for the piston and connecting rod is completed, carry out the installation procedure as soon as possible.

End By:

- a. Install the pistons and the connecting rods. Refer to Disassembly and Assembly, "Piston and Connecting Rods - Install".

i02933666

Pistons and Connecting Rods - Install

Installation Procedure

Table 71

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	21825491	Piston Ring Compressor	1
C	21825607	Angle gauge	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Discard all used connecting rod bolts.

1. If the connecting rod caps were temporarily installed, remove the connecting rod caps. If necessary, thoroughly clean all of the components.
2. Apply clean engine oil to the cylinder bore, to the piston rings, to the outer surface of the piston and to the connecting rod bearings.

Note: Install the connecting rod bearings dry when clearance checks are performed. Refer to Disassembly and Assembly, "Bearing Clearance - Check". Apply clean engine oil to the connecting rod bearings during final assembly.

3. Use Tooling (A) to rotate the crankshaft until the crankshaft pin is at the bottom center position. Lubricate the crankshaft pin with clean engine oil.

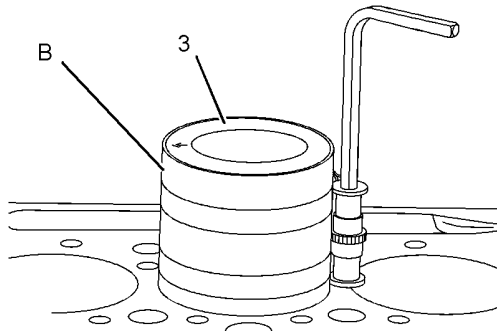


Illustration 288

g01253096

Typical example

4. Ensure that the gaps for the piston rings are at 120 degrees away from each other. Install Tooling (B) onto piston (3).

Note: Ensure that Tooling (B) is installed correctly and that the piston can easily slide from the tool. Ensure that the piston and the connecting rod assembly are installed in the correct cylinder. The arrow on the top of the piston must be toward the front of the engine.

5. Carefully push the piston and the connecting rod assembly into the cylinder bore and onto the crankshaft pin.

Note: Do not damage the finished surface of the crankshaft pin.

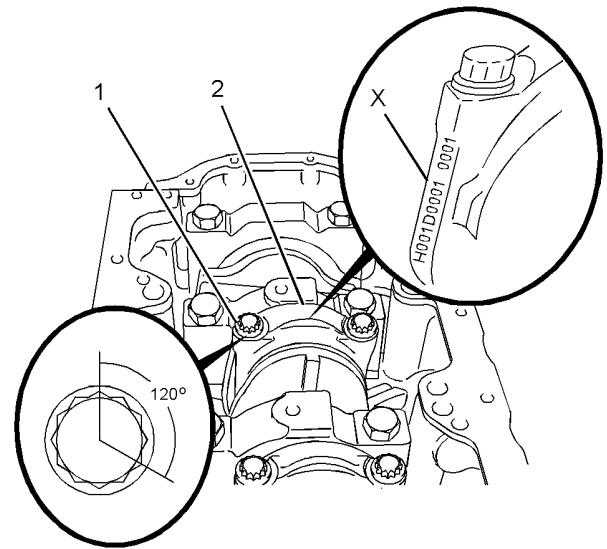


Illustration 289

g01479452

Typical example

6. Install connecting rod cap (2) onto the connecting rod.

Note: Ensure that etched Number (X) on the connecting rod cap matches the etched number on the connecting rod. Ensure the correct orientation of connecting rod cap (2).

7. Install new bolts (1) to the connecting rod. Tighten the bolts evenly to a torque of 18 N·m (13 lb ft).
8. Tighten the bolts evenly to a torque of 70 N·m (52 lb ft).
9. Use Tooling (B) to turn the bolts through an additional 120 degrees.
10. Ensure that the installed connecting rod assembly has tactile side play. Carefully rotate the crankshaft in order to ensure that there is no binding.
11. Repeat Step 2 through Step 10 in order to install the remaining pistons and connecting rods.

Note: If all pistons and connecting rods require replacement the procedure can be carried out on two cylinders at the same time. The procedure can be carried out on the following pairs of cylinders. 1 with 4 and 2 with 3. **Ensure that both pairs of the pistons and connecting rods are installed before changing from one pair of cylinders to another pair of cylinders.**

12. Check the height of the pistons above the top face of the cylinder block. Refer to Systems Operation, Testing and Adjusting, "Piston Height - Inspect" for the correct procedure.

End By:

- a. Install the piston cooling jets. Refer to Disassembly and Assembly, "Piston Cooling Jets - Remove and Install".
- b. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".
- c. Install the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Install".

i02933597

Connecting Rod Bearings - Remove (Connecting rods in position)

Removal Procedure

Table 72

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Discard all used connecting rod bolts.

Note: If all connecting rod bearings require replacement the procedure can be carried out on two cylinders at the same time. The procedure can be carried out on the following pairs of cylinders. 1 with 4 and 2 with 3. **Ensure that both pairs of the connecting rod bearings are installed before changing from one pair of cylinders to another pair of cylinders.** Refer to Disassembly and Assembly, "Connecting Rod Bearings - Install".

- 1. Use Tooling (A) to rotate the crankshaft until the crank pin is at the bottom center position.

If necessary, remove the glow plugs. Refer to Disassembly and Assembly, "Glow Plugs - Remove and Install".

Note: Removal of the glow plugs aids removal of the connecting rod bearings. It is not essential.

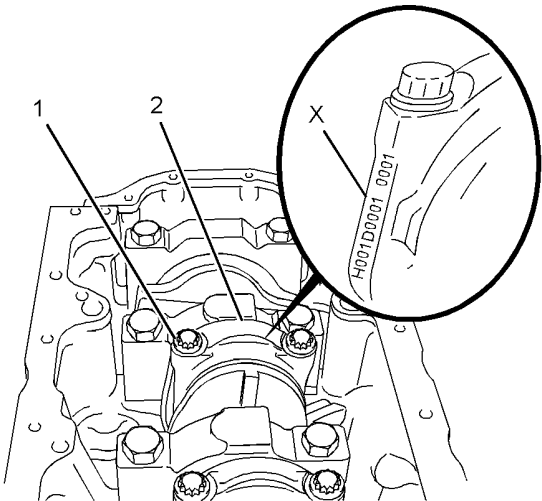


Illustration 290

g01479383

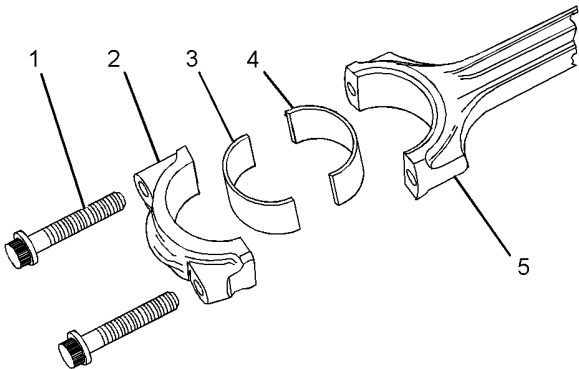


Illustration 291

g01253101

2. The connecting rod and the connecting rod cap should have an etched Number (X) on the side. The number on the connecting rod and the connecting rod cap must match. If necessary, make a temporary mark on connecting rod (5) and connecting rod cap (2) in order to identify the cylinder number.

Note: Do not punch identification marks onto fracture split connecting rods. Do not stamp identification marks onto fracture split connecting rods.

3. Remove bolts (1) and connecting rod cap (2) from connecting rod (5). Discard the bolts.
4. Remove the lower half of connecting rod bearing (3) from connecting rod cap (2). Keep the connecting rod bearing and the connecting rod cap together.
5. Carefully push the piston and connecting rod assembly into the cylinder bore until connecting rod (5) is clear of the crankshaft. Remove the upper half of connecting rod bearing (4) from connecting rod (5). Keep the bearings together.

Note: Do not push on the fracture split surfaces of the connecting rod as damage may result. Do not allow the connecting rod to contact the piston cooling jet.

Fracture split connecting rods should not be left without the connecting rod caps installed. After the removal procedure for the connecting rod bearings is complete, carry out the installation procedure as soon as possible. Refer to Disassembly and Assembly, "Connecting Rod Bearings - Install".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Discard all used connecting rod bolts.

1. Inspect the pins of the crankshaft for damage. If the crankshaft is damaged, replace the crankshaft or recondition the crankshaft. Refer to Disassembly and Assembly, "Crankshaft - Remove" and Disassembly and Assembly, "Crankshaft - Install". Ensure that the connecting rod bearings are clean and free from wear or damage. If necessary, replace the connecting rod bearings.

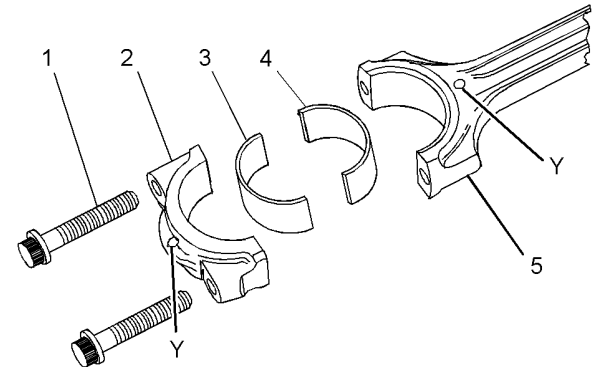


Illustration 292

g01260354

Connecting Rod Bearings - Install (Connecting rods in position)

Installation Procedure

Table 73

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	21825607	Angle Gauge	1

⁽¹⁾ The Crankshaft Turning Tool is used on the front pulley.

⁽²⁾ This Tool is used in the aperture for the electric starting motor.

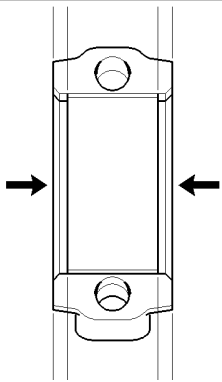


Illustration 293

g01001160

Aligning the bearing in the center of the connecting rod

Note: New connecting rod bearings are supplied with an alignment tool. If new bearings are installed, use the tool to align the bearing in the connecting rod.

2. Install the upper half of connecting rod bearing (4) to connecting rod (5). Ensure that the bearing is centralized in the connecting rod. Refer to Illustration 293.

The ends of the bearing must be centered in the connecting rod. The ends of the bearing must be equally positioned in relation to the faces of the connecting rod.

3. Clean the connecting rod cap. Install lower connecting rod bearing (3) to connecting rod cap (2). Ensure that the connecting rod bearing is centralized in the connecting rod cap. Refer to Illustration 293.

The ends of the lower connecting rod bearing must be centered in the connecting rod cap. The ends of the lower connecting rod bearing must be equally positioned in relation to the faces of the connecting rod cap.

4. Lubricate upper connecting rod bearing (4) with clean engine oil.
5. If necessary, use Tooling (A) in order to rotate the crankshaft until the crankshaft pin is at the bottom dead center position.
6. Carefully pull connecting rod (5) against the crankshaft pin.

Note: Do not allow the connecting rod to contact the piston cooling jet.

7. Lubricate the pin of the crankshaft and lubricate lower connecting rod bearing (3) with clean engine oil.

8. Install connecting rod cap (2) to connecting rod (5).

Note: Ensure that etched Number (X) on connecting rod cap (2) matches etched Number (X) on connecting rod (5). Ensure the correct orientation of the connecting rod cap. The forged Marks (Y) on the connecting rod and the connecting rod cap should be on the same side. Refer to Illustration 292.

9. Install new bolts (1). Tighten the bolts evenly to a torque of 18 N·m (13 lb ft).

Note: Do not reuse the old bolts in order to secure the connecting rod cap.

10. Tighten the bolts evenly to a torque of 70 N·m (52 lb ft).

11. Use Tooling (B) to turn the bolts through an additional 120 degrees.

12. Ensure that the installed connecting rod assembly has tactile side play. Carefully rotate the crankshaft in order to ensure that there is no binding.

13. Repeat Step 2 through Step 12 for the remaining connecting rod bearings.

Note: If all connecting rod bearings require replacement the procedure can be carried out on two cylinders at the same time. The procedure can be carried out on the following pairs of cylinders. 1 with 4 and 2 with 3. **Ensure that both pairs of the connecting rod bearings are installed before changing from one pair of cylinders to another pair of cylinders..**

14. If the glow plugs were removed, install the glow plugs. Refer to Disassembly and Assembly, "Glow Plugs - Install".

End By:

- a. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

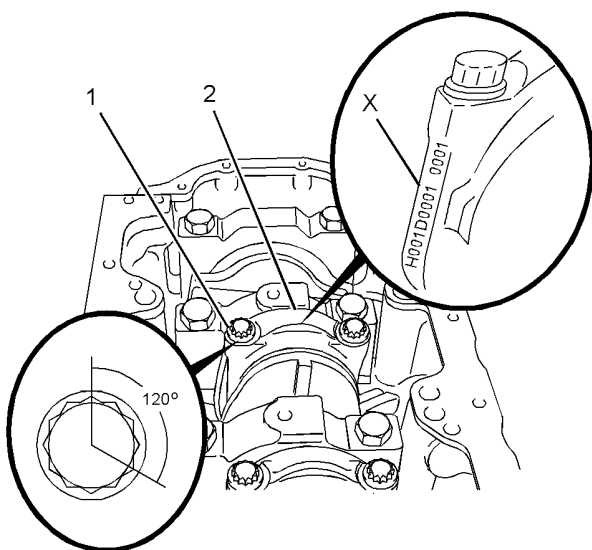


Illustration 294
Typical example

g01479452

i02933605

Crankshaft Main Bearings - Remove and Install (Crankshaft in position)

Removal Procedure

Table 74

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1

- (1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Start By:

- a. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".
- b. Remove the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Remove".

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

This procedure must only be used to remove and install the main bearing shells with the crankshaft in position.

The removal procedure and the installation procedure must be completed for each pair of main bearing shells before the next pair of main bearing shells are removed.

NOTICE

Keep all parts clean from contaminants.
Contaminants may cause rapid wear and shortened component life.

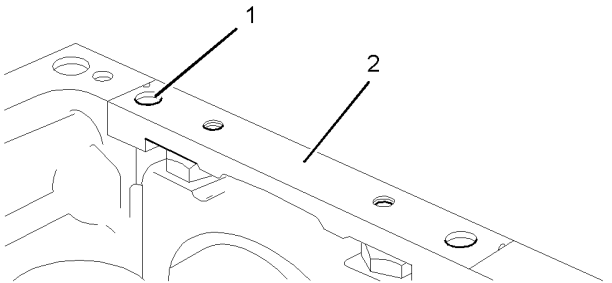


Illustration 295

g01490997

Typical example

- 1. Remove allen head screws (1). Remove bridge piece (2).

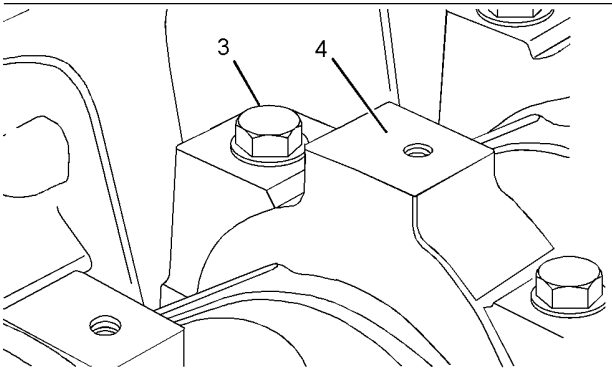


Illustration 296

g01253719

Typical example

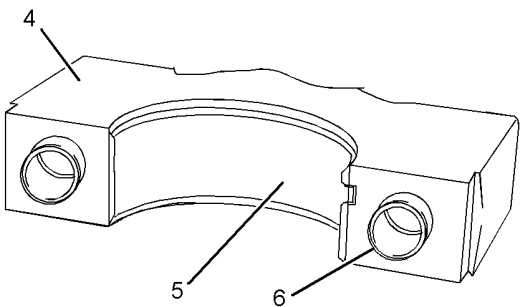


Illustration 297

g01253146

Typical example

- 2. Ensure that the main bearing cap is marked for the correct location and orientation.
- 3. Remove bolts (3). Remove main bearing cap (4) from the cylinder block.

4. Remove lower main bearing (5) from main bearing cap (4). Keep the main bearing and the main bearing cap together. Take care not to displace dowels (6).

Note: The lower main bearing is a plain bearing that has no oil holes. The dowels may remain in the main bearing cap or in the cylinder block.

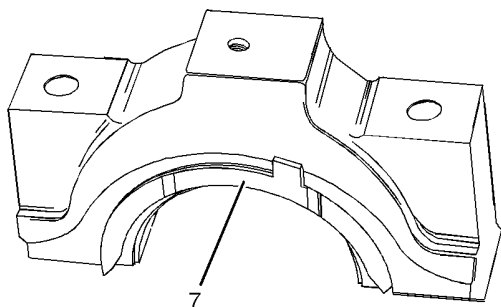


Illustration 298

g01253137

Typical example

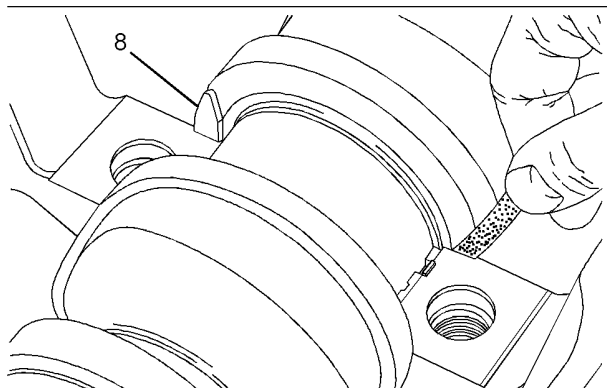


Illustration 299

g01253142

Typical example

5. For number three main bearing cap, remove thrust washers (7).
6. For number three main bearing, remove thrust washers (8) from the cylinder block. In order to remove the thrust washers, push the crankshaft toward the front of the engine or push the crankshaft toward the rear of the engine. Use Tooling (A) in order to rotate the crankshaft. If necessary, use a suitable tool to free the thrust washers.

Note: Do not damage the machined surfaces of the crankshaft during removal of the thrust washers.

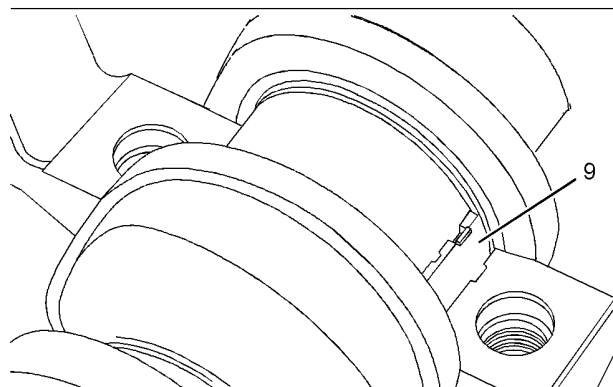


Illustration 300

g01253145

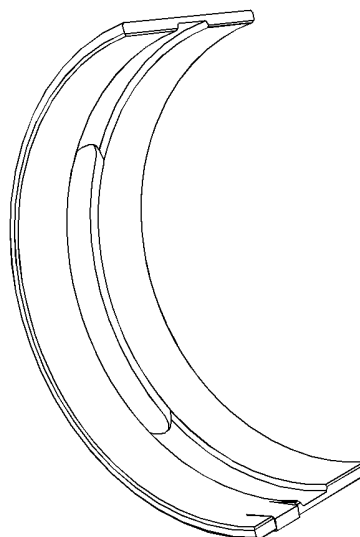


Illustration 301

g01889993

No. 1 Upper Main Bearing

7. Push out upper main bearing (9) with a suitable tool from the side opposite the locating tab. Carefully rotate the crankshaft while you push on the bearing. Remove upper main bearing (9) from the cylinder block. Keep the bearings together.

Note: Do not damage the machined surfaces of the crankshaft during removal of the upper main bearing. Number 1 upper main bearing has an oil slot. See Illustration 303. All other upper main bearings have a groove and two oil holes.

Installation Procedure

Table 75

Required Tools			
Tool	Part Number	Part Description	Qty
B	21825617	Dial Indicator Group	1
C	-	Straight Edge	1
D	-	5 mm Allen Socket	1
E	21826038	POWERPART Silicon Rubber Sealant	1

NOTICE

This procedure must only be used to remove and install the main bearing shells with the crankshaft in position.

The removal procedure and the installation procedure must be completed for each pair of main bearing shells before the next pair of main bearing shells are removed.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the main bearings are clean and free from wear or damage. If necessary, replace the main bearings.
2. Clean the journals of the crankshaft. Inspect the journals of the crankshaft for damage. If necessary, replace the crankshaft or recondition the crankshaft.

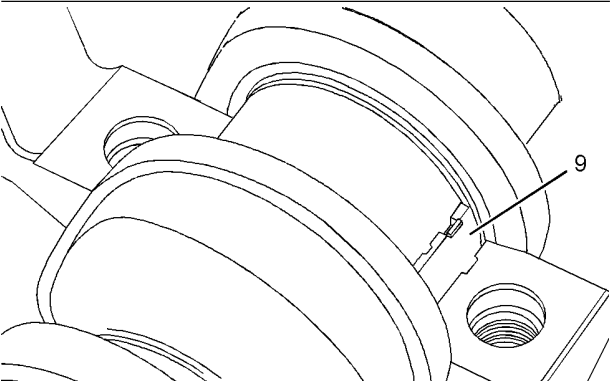


Illustration 302

Typical example

g01253145

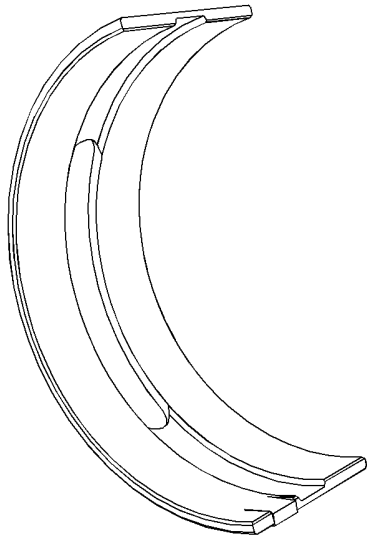


Illustration 303

g01889993

No. 1 Upper Main Bearing

3. Lubricate the crankshaft journal and upper main bearing (9) with clean engine oil. Slide upper main bearing (9) into position between the crankshaft journal and the cylinder block. Ensure that the locating tab for the upper main bearing is correctly seated in the slot in the cylinder block.

Note: Number 1 upper main bearing has an oil slot. See Illustration 303. All other upper main bearings have a groove and two oil holes.

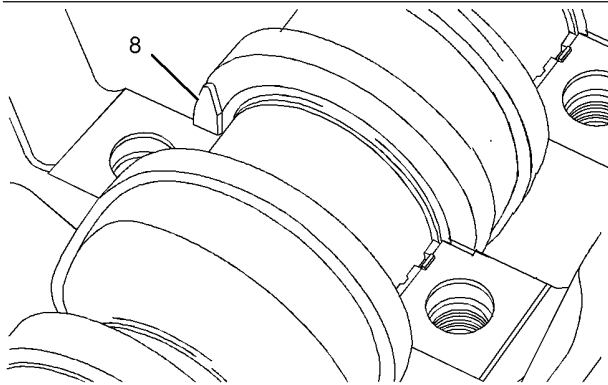


Illustration 304

g01261200

Typical example

4. For number three main bearing, ensure that thrust washers (8) are clean and free from wear or damage. If necessary, replace the thrust washers. Lubricate thrust washers (8) with clean engine oil. Slide the thrust washers into position between the crankshaft and the cylinder block. The grooves in the thrust washers must be located against the crankshaft.

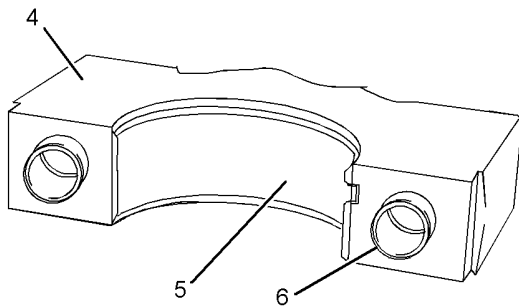


Illustration 305

g01253146

Typical example

5. Install lower main bearing (5) into main bearing cap (4). Ensure that the locating tab for the lower main bearing is correctly seated into the slot in the bearing cap.

Note: The lower main bearing is a plain bearing that has no oil holes.

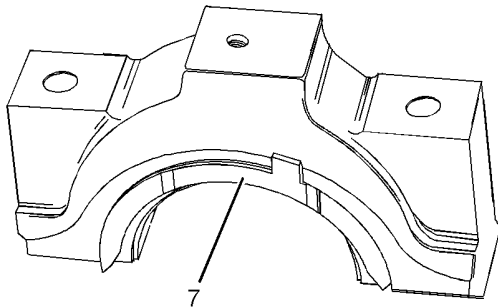


Illustration 306

g01253137

Typical example

6. For number three main bearing cap, ensure that thrust washers (7) are clean and free from wear or damage. If necessary, replace the thrust washers. Lubricate thrust washers (7) with clean engine oil. Place the thrust washers into position on the main bearing cap. Ensure that the locating tab is correctly seated in the main bearing cap.

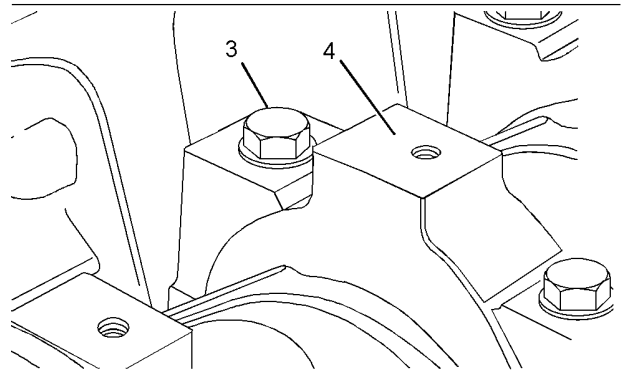


Illustration 307

g01253719

Typical example

7. Lubricate the crankshaft journal and the lower main bearing with clean engine oil. Install main bearing cap (4) to the cylinder block.

Note: Ensure the correct orientation of the main bearing cap. The locating tab for the upper and the lower bearing should be on the same side of the engine.

8. Lubricate the threads of bolts (3) with clean engine oil. Lubricate the underside of the heads of the bolts with clean engine oil.
9. Install bolts (3) to main bearing cap (4). Evenly tighten the bolts in order to pull cap (5) into position. Ensure that the cap is correctly seated.

Note: Do not tap the main bearing cap into position as the bearing may be dislodged.

10. Tighten bolts (3) to a torque of 245 N·m (180 lb ft).

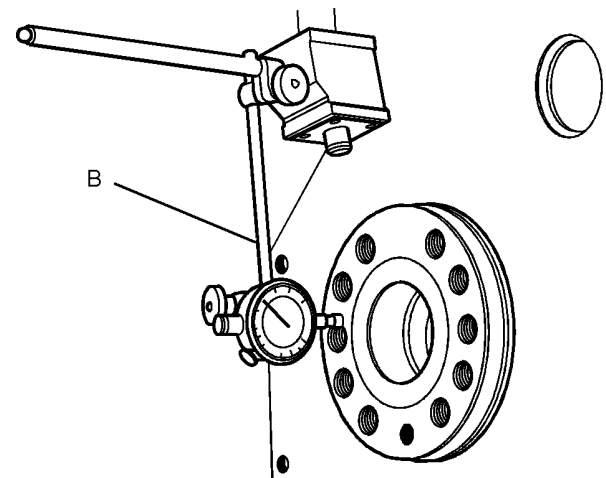


Illustration 308

g01253186

Typical example

11. Check the crankshaft end play. Push the crankshaft toward the front of the engine. Install Tooling (B) to the cylinder block and the rear face of the crankshaft. Push the crankshaft toward the rear of the engine. Use Tooling (B) to measure the crankshaft end play. The permissible crankshaft end play is 0.17 to 0.41 mm (0.007 to 0.016 inch).

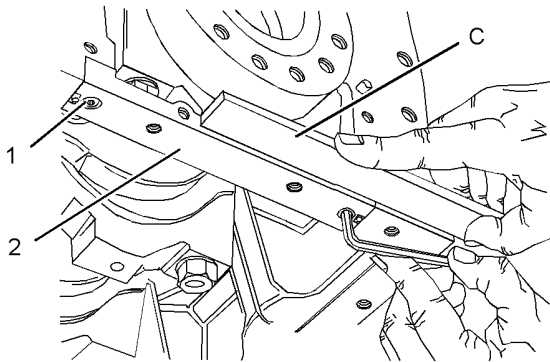


Illustration 309

g01253836

Typical example

12. Follow Step 12.a through Step 12.d in order to install the bridge piece.

- Ensure that the recess in the cylinder block and the bridge piece are clean, dry and free from old sealant.
- Install bridge piece (2) and allen head screws (1). Tighten the allen head screws finger tight.
- Use Tooling (C) in order to align the rear face of the bridge piece with the rear face of the cylinder block.
- Use Tooling (D) to tighten allen head screws (1) to a torque of 16 N·m (12 lb ft).

13. Install the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Install".

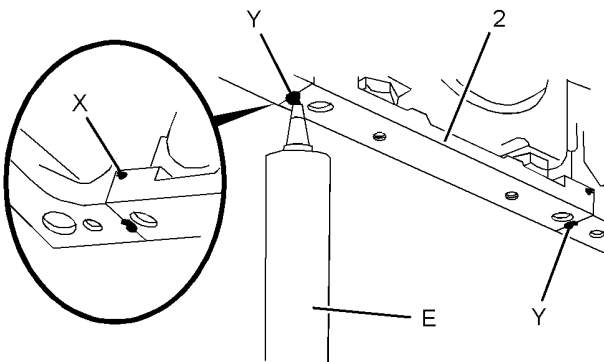


Illustration 310

g01344584

Typical example

14. Apply Tooling (E) to Cavities (Y) in bridge piece (2). Continue to apply Tooling (E) until sealant extrudes from Cavities (X).

Note: If the oil pan will not be installed immediately, ensure that the face of the bridge piece and the cylinder block are left free of sealant.

End By:

- If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

i02933602

Crankshaft - Remove

Removal Procedure

Table 76

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Lifting Strap	1

Start By:

- Remove the rocker shaft and pushrods. Refer to Disassembly and Assembly, "Rocker Shaft and Pushrod - Remove".
- Remove the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Remove".
- Remove the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Remove".
- If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

NOTICE

If the crankshaft has been reground or if the crankshaft has been replaced, the height of the piston above the cylinder block must be inspected. It is necessary to remove the cylinder head in order to inspect the height of the piston above the cylinder block.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. The engine should be mounted on a suitable stand and placed in the inverted position.
2. If necessary, remove the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Remove". Remove the pistons and connecting rods. Refer to Disassembly and Assembly, "Pistons and Connecting Rods - Remove".

If the cylinder head, the pistons and the connecting rods have not been removed, remove the connecting rod caps. Refer to Disassembly and Assembly, "Connecting Rod Bearings - Remove".

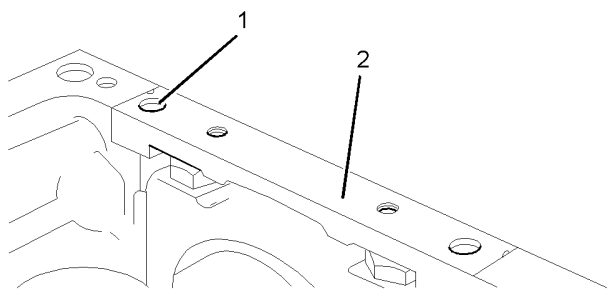


Illustration 311
Typical example

3. Remove allen head screws (1). Remove bridge piece (2).
4. Ensure that the main bearing caps are marked for the location and orientation.

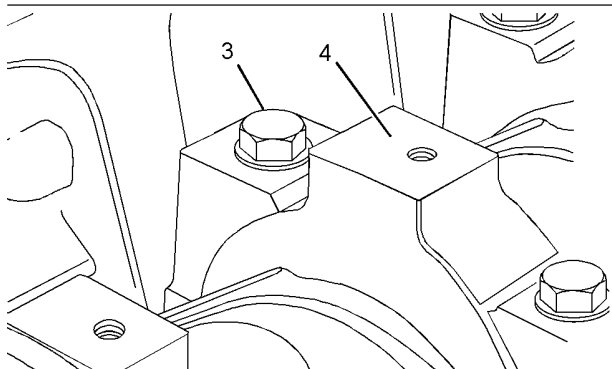


Illustration 312
Typical example

5. Remove bolts (3) and main bearing caps (4) from the cylinder block.

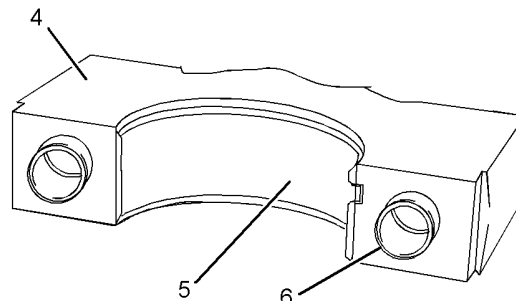


Illustration 313
Typical example

g01253146

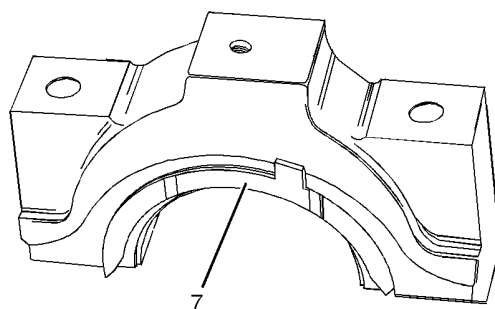


Illustration 314
Typical example

g01253137

6. Remove lower main bearings (5) from main bearing caps (4). Take care not to displace dowels (6). For number three main bearing cap, remove thrust washers (7). Keep the lower main bearings and the thrust washers with the respective main bearing caps.

Note: The lower main bearings are plain bearings that have no oil holes. The dowels may remain in the main bearing cap or in the cylinder block.

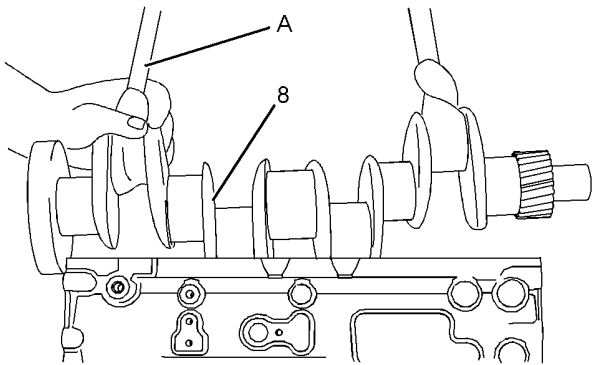


Illustration 315

g01254099

Typical example

7. Attach Tooling (A) and a suitable lifting device to crankshaft (8). Carefully lift the crankshaft out of the cylinder block. The weight of the crankshaft is approximately 30 kg (66 lb).

Note: Do not damage any of the finished surfaces on the crankshaft. When the crankshaft is removed from the engine, the crankshaft must be supported on a suitable stand in order to prevent damage to the crankshaft timing ring.

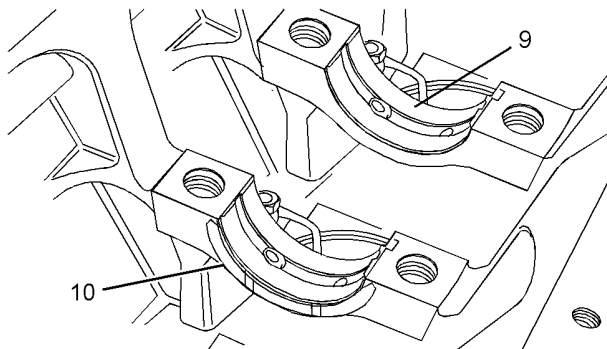


Illustration 316

g01254104

Typical example

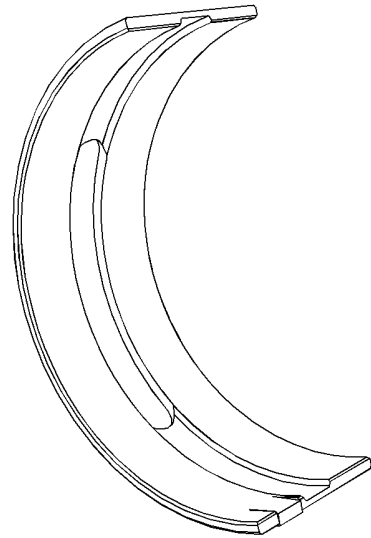


Illustration 317

g01889993

No. 1 Upper Main Bearing

8. Remove upper main bearings (9) from the cylinder block. Keep the upper main bearings with the respective main bearing caps.

Note: Number 1 upper main bearing has an oil slot. See Illustration 317. All other upper main bearings have a groove and two oil holes.

9. Remove thrust washers (10) from number three main bearing in the cylinder block.
10. If necessary, remove the crankshaft timing ring. Refer to Disassembly and Assembly, "Crankshaft Timing Ring - Remove and Install".
11. If necessary, remove the crankshaft gear. Refer to Disassembly and Assembly, "Crankshaft Gear - Remove and Install".

i02933601

Crankshaft - Install

Installation Procedure

Table 77

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Lifting Strap	1
B	21825617	Dial Indicator Group	1
C	-	Straight Edge	1
D	-	5 mm Allen Socket	1
E	21826038	POWERPART Silicon Rubber Sealant	-

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

If the crankshaft has been reground or if the crankshaft has been replaced, the height of the piston above the cylinder block must be inspected. It is necessary to remove the cylinder head in order to inspect the height of the piston above the cylinder block.

NOTICE

If the crankshaft has been reground or if the crankshaft has been replaced, ensure that the engine oil system is free from debris and contaminants.

1. Clean the crankshaft and inspect the crankshaft for wear or damage. Refer to Specifications, "Crankshaft" for more information. If necessary, replace the crankshaft or recondition the crankshaft.
2. If necessary, install the crankshaft gear. Refer to Disassembly and Assembly, "Crankshaft Gear - Remove and Install".
3. If necessary, install a new crankshaft timing ring. Refer to Disassembly and Assembly, "Crankshaft Timing Ring - Remove and Install".

Note: The engine should be mounted on a suitable stand and placed in the inverted position.

4. Ensure that the parent bores for the crankshaft bearings in the cylinder block are clean. Ensure that the threads for the bearing bolts in the cylinder block are clean and free from damage.

5. Clean the crankshaft bearings and the thrust washers. Inspect the bearings and the thrust washers for wear or damage. If necessary, replace the bearings and the thrust washers.

Note: If the crankshaft bearings are replaced, check whether oversize bearings were previously installed. If the thrust washers are replaced, check whether oversize thrust washers were previously installed.

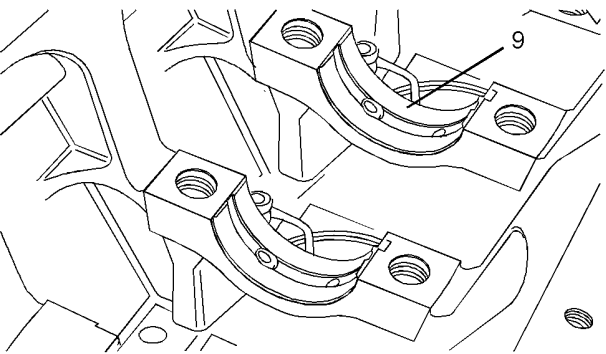


Illustration 318

g01253240

Typical example

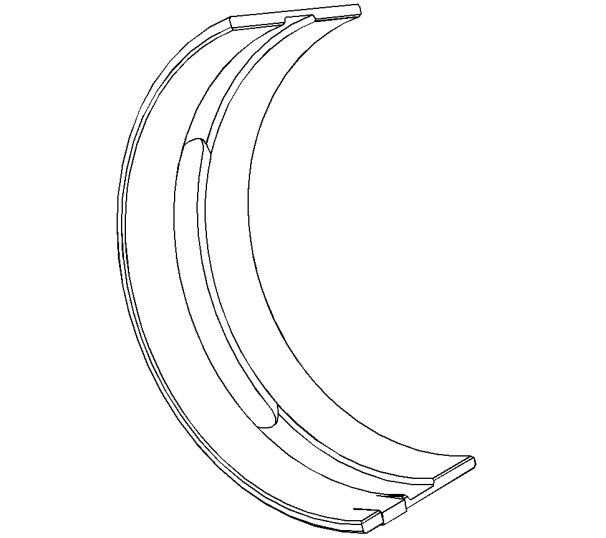


Illustration 319

g01889993

No. 1 Upper Main Bearing

6. Install upper bearings (9) to the cylinder block. Ensure that the locating tabs for the upper bearings are seated in the slots in the cylinder block.

Note: Number 1 upper main bearing has an oil slot. See Illustration 319. All other upper bearings have a groove and two oil holes.

7. Lubricate upper bearings (9) with clean engine oil.

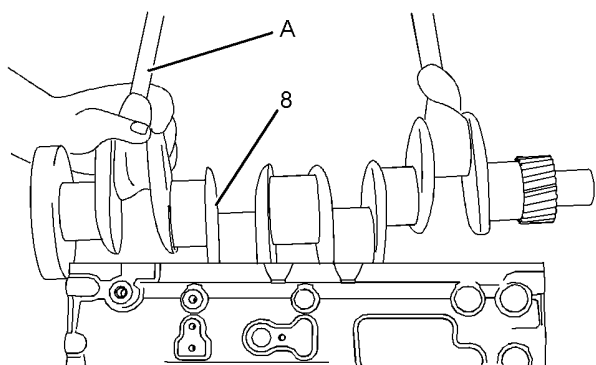


Illustration 320

g01254099

Typical example

8. Attach Tooling (A) and a suitable lifting device to crankshaft (8). Carefully lift the crankshaft into the cylinder block. The weight of the crankshaft is approximately 30 kg (66 lb). Remove Tooling (A).

Note: Do not damage any of the finished surfaces on the crankshaft. Do not damage the bearing.

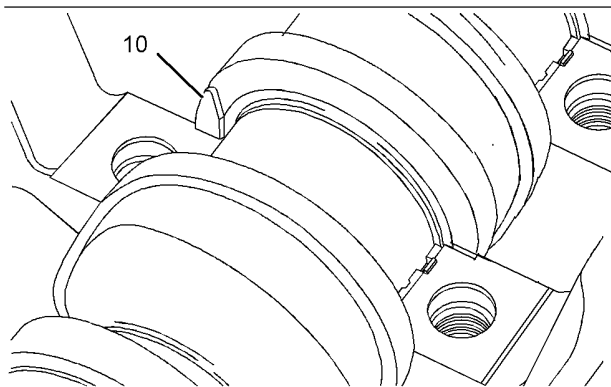


Illustration 321

g01254100

Typical example

9. For number three bearing, ensure that thrust washers (10) are clean and free from wear or damage. If necessary, replace the thrust washers. Lubricate thrust washers (10) with clean engine oil. Slide the thrust washers into position between the crankshaft and the cylinder block.

Note: The grooves in the thrust washers must be located against the crankshaft.

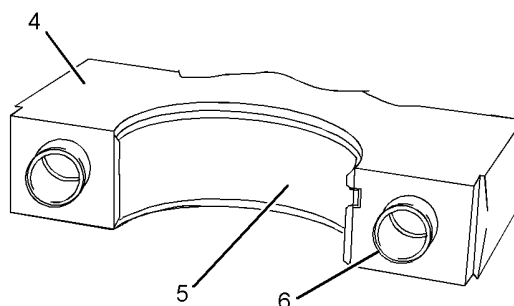


Illustration 322

g01253146

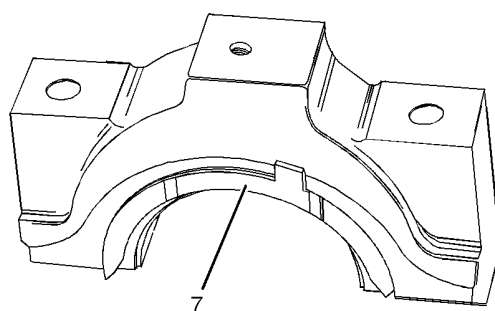


Illustration 323

g01253137

10. Install lower bearings (5) into bearing caps (4). Ensure that the locating tabs for the lower bearings are correctly seated into the slots in the bearing caps. For number three bearing cap, ensure that thrust washers (7) are clean and free from wear or damage. If necessary, replace both the thrust washers. Lubricate thrust washers (7) with clean engine oil. Place the thrust washers into position on the bearing cap. Ensure that the locating tab is correctly seated in the bearing cap.

Note: The lower bearing is a plain bearing that has no oil holes.

11. Lubricate lower bearings (5) and lubricate the journals of crankshaft (8) with clean engine oil. Install bearing caps (4) to the cylinder block.

Note: Ensure the correct location and orientation of the bearing caps. The locating tabs for the upper and the lower bearings should be on the same side of the engine.

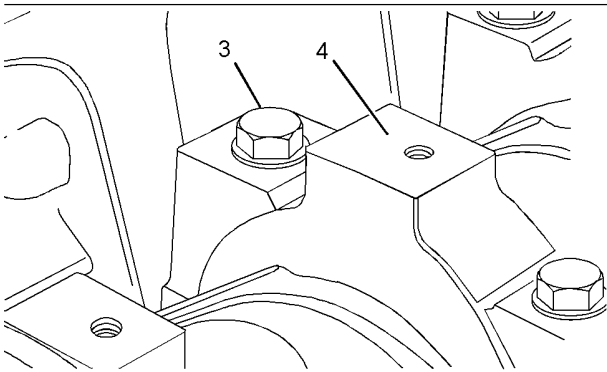


Illustration 324

g01253719

12. Lubricate the threads of bolts (3) with clean engine oil. Lubricate the underside of the heads of the bolts with clean engine oil.
 13. Install bolts (3) to bearing caps (4). Evenly tighten the bolts in order to pull the caps into position. Ensure that the caps are correctly seated.
- Note:** Do not tap the bearing caps into position as the bearing may be dislodged.
14. Tighten bolts (3) to a torque of 245 N·m (180 lb ft).
 15. Rotate the crankshaft in order to ensure that there is no binding.

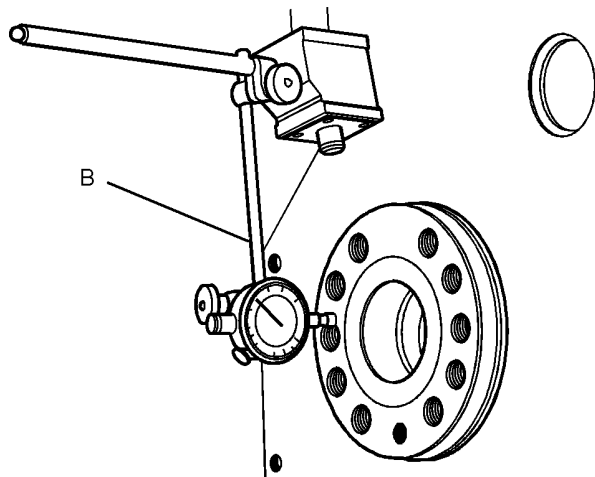


Illustration 325

g01253186

Typical example

16. Check the crankshaft end play. Push the crankshaft toward the front of the engine. Install Tooling (B) to the cylinder block and the rear face of the crankshaft. Push the crankshaft toward the rear of the engine. Use Tooling (B) to measure the crankshaft end play. The permissible crankshaft end play is 0.17 to 0.41 mm (0.007 to 0.016 inch).

17. If the crankshaft has been replaced or the crankshaft has been reconditioned, inspect the height of the piston above the cylinder block. Refer to Systems Operation, Testing and Adjusting, "Piston Height - Inspect" for more information.

If the crankshaft has not been replaced or the crankshaft has not been reconditioned, install the connecting rod caps. Refer to Disassembly and Assembly, "Connecting Rod Bearings - Install".

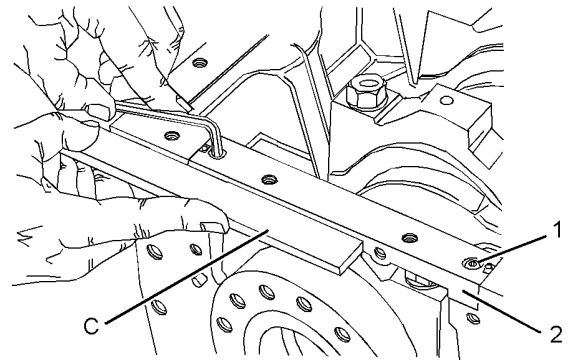


Illustration 326

g01254102

Typical example

18. Follow Step 18.a through Step 18.d in order to install the bridge piece.
 - a. Ensure that the cylinder block and the bridge piece are clean, dry and free from old sealant.
 - b. Install bridge piece (2) and allen head screws (1). Tighten the allen head screws finger tight.
 - c. Use Tooling (C) in order to align the rear face of the bridge piece with the rear face of the cylinder block.
 - d. Use Tooling (D) in order to tighten the allen head screws to a torque of 16 N·m (12 lb ft).
19. Install the crankshaft rear seal. Refer to Disassembly and Assembly, "Crankshaft Rear Seal - Install".

i02933611

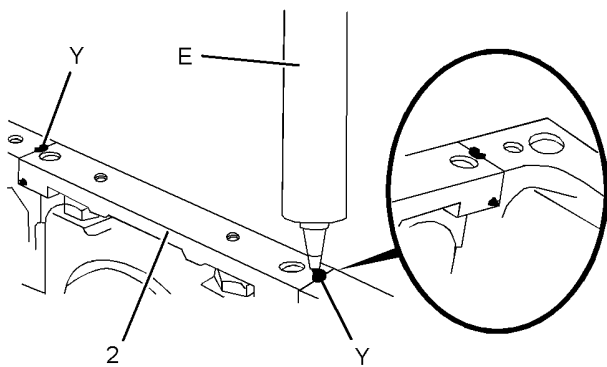


Illustration 327

g01344593

Typical example

- 20.** Apply Tooling (E) to Cavities (Y) in the bridge piece (2). Continue to apply Tooling (E) until sealant extrudes from Cavities (X).

Note: If the oil pan will not be installed immediately, ensure that the face of the bridge piece and the cylinder block are left free of sealant.

End By:

- a. If necessary, install the pistons and connecting rods. Refer to Disassembly and Assembly, "Pistons and Connecting Rods - Install".
- b. If the engine has a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine does not have a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".
- c. Install the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Install".
- d. If necessary, install the cylinder head. Refer to Disassembly and Assembly, "Cylinder Head - Install".
- e. Install the rockershaft and pushrods. Refer to Disassembly and Assembly, "Rocker Shaft and PushRod - Install".

Crankshaft Timing Ring - Remove and Install

Removal Procedure

Start By:

- a. Remove the crankshaft. Refer to Disassembly and Assembly, "Crankshaft - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

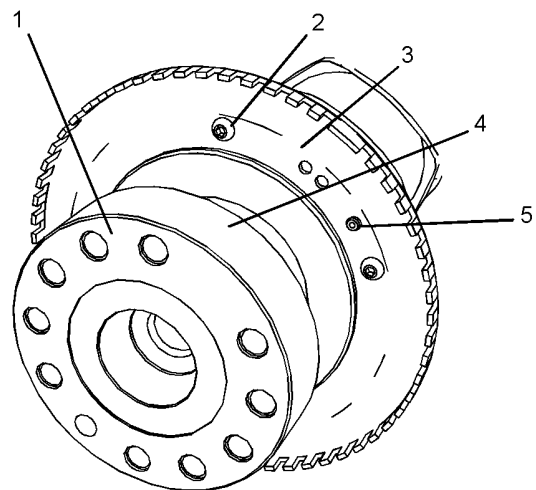


Illustration 328

g01254108

1. Support crankshaft (1) on a suitable stand.
2. Remove allen head screws (2) from crankshaft timing ring (3). Do not reuse the allen head screws.
3. Carefully remove crankshaft timing ring (3) from crankshaft (1). Do not reuse the crankshaft timing ring.

Note: Ensure that seal surface (4) of the crankshaft is not damaged when the crankshaft timing ring is removed.

Note: Do not remove dowel (5) from crankshaft (1) unless the dowel is damaged.

Installation Procedure

Table 78

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	4 mm Allen Socket	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Support crankshaft (1) on a suitable stand.
2. Ensure that the flange for the crankshaft timing ring on the crankshaft is clean and free from damage.

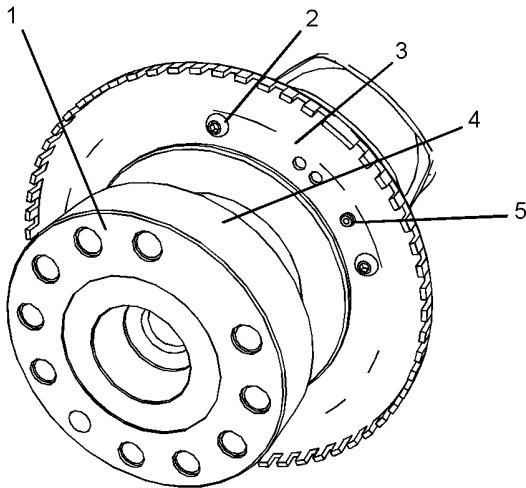


Illustration 329

g01254108

3. If dowel (5) was removed, install a new dowel to crankshaft (1).
4. Position crankshaft timing ring (3) onto the crankshaft with the teeth toward rear seal surface (4). Align the hole in crankshaft timing ring (3) with dowel (5). Carefully install crankshaft timing ring (3) to crankshaft (1).

Note: Ensure that seal surface (4) on the crankshaft is not damaged when the crankshaft timing ring is installed.

5. Use Tooling (A) to install new allen head screws (2). Tighten the allen head screws to a torque of 9 N·m (80 lb in).

End By:

- a. Install the crankshaft. Refer to Disassembly and Assembly, "Crankshaft - Install".

i02933604

Crankshaft Gear - Remove and Install

Removal Procedure

Table 79

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Bearing Puller	1
	-	Puller	1
	-	Crossblock	1
	-	Puller Leg	2

Start By:

- a. Remove the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Remove".
- b. If the engine is equipped with a balancer, remove the balancer. Refer to Disassembly and Assembly, "Balancer - Remove". If the engine is not equipped with a balancer, remove the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The crankshaft gear may be a sliding fit on the crankshaft or an interference fit on the crankshaft.

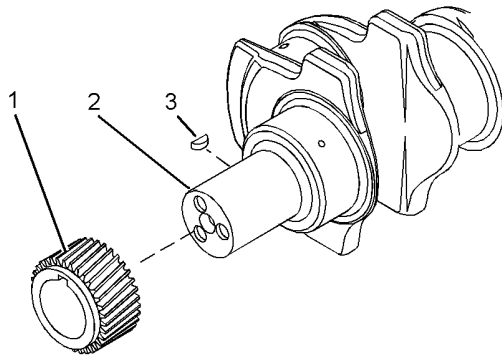


Illustration 330
Typical example

g01367358

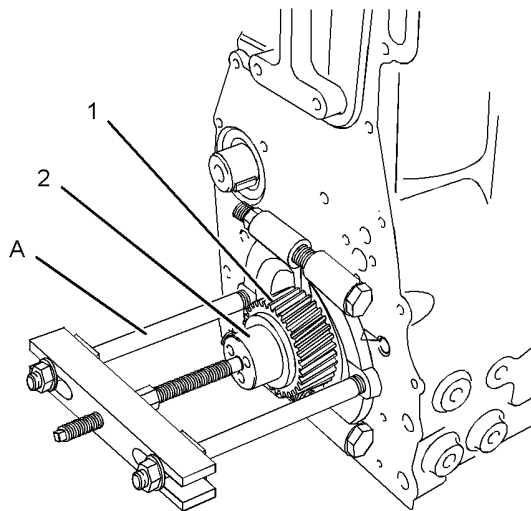


Illustration 331
Typical example

g01270549

1. If the crankshaft gear is a sliding fit on the crankshaft, remove crankshaft gear (1) from crankshaft (2).

If the crankshaft gear is an interference fit on the crankshaft, use Tooling (A) in order to remove crankshaft gear (1) from crankshaft (2).

2. If necessary, remove key (3) from crankshaft (2).

Note: Do not remove the key from the crankshaft unless the key is damaged.

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that all components are clean and free from wear or damage. If necessary, replace any components that are worn or damaged.

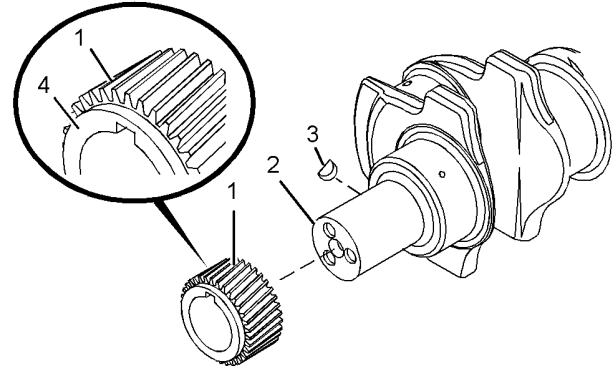


Illustration 332
Typical example

g01367359

2. If necessary, install a new key (3) to crankshaft (2).

Note: The crankshaft gear may be a sliding fit on the crankshaft or an interference fit on the crankshaft.

⚠ WARNING

Hot parts or hot components can cause burns or personal injury. Do not allow hot parts or components to contact your skin. Use protective clothing or protective equipment to protect your skin.

3. If the crankshaft gear is a sliding fit on the crankshaft, align the keyway in crankshaft gear (1) with key (3) in the crankshaft. Install crankshaft gear (1) to crankshaft (2).

If the crankshaft gear is an interference fit on the crankshaft, heat crankshaft gear (1) in an oven to $150^{\circ} \pm 50^{\circ}\text{C}$ ($302^{\circ} \pm 90^{\circ}\text{F}$). Align the keyway in crankshaft gear (1) with key (3) in the crankshaft. Install crankshaft gear (1) to crankshaft (2).

Ensure that shoulder (4) on crankshaft gear (1) is toward the front of the engine.

End By:

- a. Install the front housing. Refer to Disassembly and Assembly, "Housing (Front) - Install".
- b. If the engine is equipped with a balancer, install the balancer. Refer to Disassembly and Assembly, "Balancer - Install". If the engine is not equipped with a balancer, install the engine oil pump. Refer to Disassembly and Assembly, "Engine Oil Pump - Remove and Install".

i02748526

Bearing Clearance - Check

Measurement Procedure

Table 80

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Plastic Gauge (Green) 0.025 to 0.076 mm (0.001 to 0.003 inch)	1
	-	Plastic Gauge (Red) 0.051 to 0.152 mm (0.002 to 0.006 inch)	1
	-	Plastic Gauge (Blue) 0.102 to 0.229 mm (0.004 to 0.009 inch)	1
	-	Plastic Gauge (Yellow) 0.230 to 0.510 mm (0.009 to 0.020 inch)	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: Perkins does not recommend the checking of the actual clearances of the bearing shells particularly on small engines. This is because of the possibility of obtaining inaccurate results and of damaging the bearing shell or the journal surfaces. Each Perkins bearing shell is quality checked for specific wall thickness.

Note: The measurements should be within specifications and the correct bearings should be used. If the crankshaft journals and the bores for the block and the rods were measured during disassembly, no further checks are necessary. However, if the technician still wants to measure the bearing clearances, Tooling (A) is an acceptable method. Tooling (A) is less accurate on journals with small diameters if clearances are less than 0.10 mm (0.004 inch).

NOTICE

Lead wire, shim stock or a dial bore gauge can damage the bearing surfaces.

The technician must be very careful to use Tooling (A) correctly. The following points must be remembered:

- Ensure that the backs of the bearings and the bores are clean and dry.

- Ensure that the bearing locking tabs are properly seated in the tab grooves.
- The crankshaft must be free of oil at the contact points of Tooling (A).

1. Put a piece of Tooling (A) on the crown of the bearing that is in the cap.

Note: Do not allow Tooling (A) to extend over the edge of the bearing.

2. Use the correct torque-turn specifications in order to install the bearing cap. Do not use an impact wrench. Be careful not to dislodge the bearing when the cap is installed.

Note: Do not turn the crankshaft when Tooling (A) is installed.

3. Carefully remove the cap, but do not remove Tooling (A). Measure the width of Tooling (A) while Tooling (A) is in the bearing cap or on the crankshaft journal. Refer to Illustration 333.

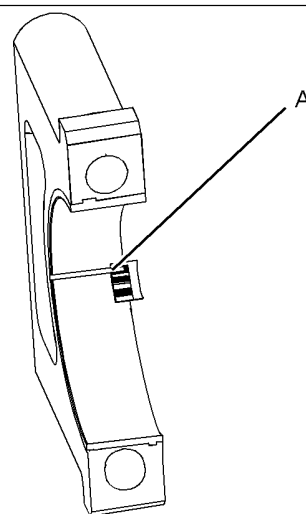


Illustration 333

g01152855

Typical Example

4. Remove all of Tooling (A) before you install the bearing cap.

Note: When Tooling (A) is used, the readings can sometimes be unclear. For example, all parts of Tooling (A) are not the same width. Measure the major width in order to ensure that the parts are within the specification range. Refer to Specifications Manual, "Connecting Rod Bearing Journal" and Specifications Manual, "Main Bearing Journal" for the correct clearances.

i02933606

Crankshaft Position Sensor - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

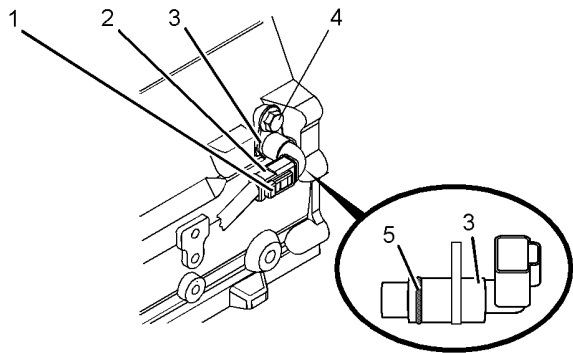


Illustration 334

g01479572

Typical example

1. Slide locking tab (1) into the unlocked position.
2. Disconnect harness assembly (2) from position sensor (3).
3. Remove bolt (4).
4. Carefully remove position sensor (3) from the cylinder block.

Note: Do not use a lever to remove the position sensor from the cylinder block.

5. Remove O-ring seal (5) from position sensor (3).

Installation Procedure

Table 81

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

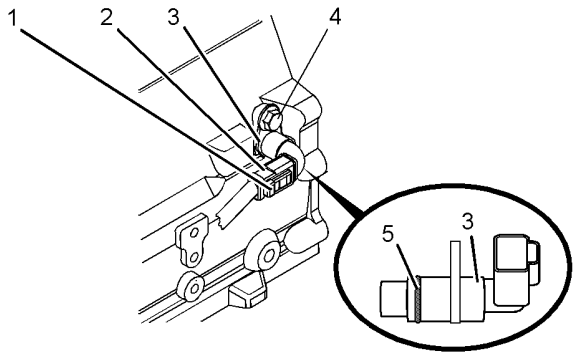


Illustration 335

g01479572

Typical example

1. Install a new O-ring seal (5) to the groove in position sensor (3). Lubricate the new O-ring seal with Tooling (A).
 2. Align the hole in position sensor (3) with the hole in the cylinder block. Install the position sensor to the cylinder block.
- Note:** Do not use bolt (4) to pull the position sensor into position against the cylinder block.
3. Install bolt (4). Tighten the bolt to a torque of 22 N·m (16 lb ft).
 4. Connect harness assembly (2) to position sensor (3).
 5. Slide locking tab (1) into the locked position.

i02933668

Position Sensor (Fuel Injection Pump) - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

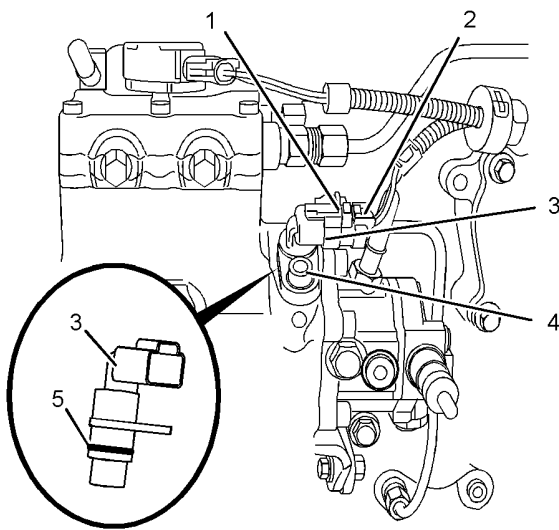


Illustration 336
Typical example

1. Slide locking tab (1) into the unlocked position.
2. Disconnect harness assembly (2) from position sensor (3).
3. Remove bolt (4).
4. Carefully remove position sensor (3) from the fuel injection pump.

Note: Do not use a lever to remove the position sensor from the fuel injection pump.

5. Plug the hole for the position sensor in the fuel injection pump with a new plug.
6. Remove O-ring seal (5) from position sensor (3).

Installation Procedure

Table 82

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

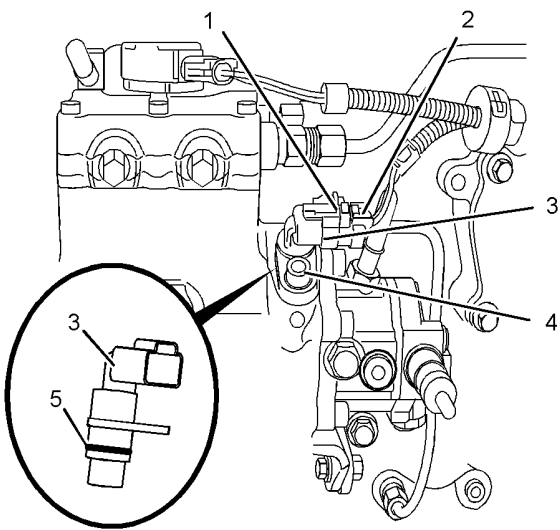


Illustration 337
Typical example

1. Install a new O-ring seal (5) to the groove in position sensor (3). Lubricate the new O-ring seal with Tooling (A).
2. Remove the plug from the hole in the fuel injection pump for the position sensor.
3. Align the hole in position sensor (3) with the hole in the fuel injection pump. Install the position sensor to the fuel injection pump.

Note: Do not use bolt (4) to pull the position sensor into position against the fuel injection pump.

4. Install bolt (4). Tighten the bolt to a torque of 22 N·m (16 lb ft).
5. Connect harness assembly (2) to position sensor (3).
6. Slide locking tab (1) into the locked position.

i02933598

Coolant Temperature Sensor - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting, and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

1. Drain the coolant from the cooling system, to a level below the coolant temperature sensor, into a suitable container for storage or for disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct draining procedure.

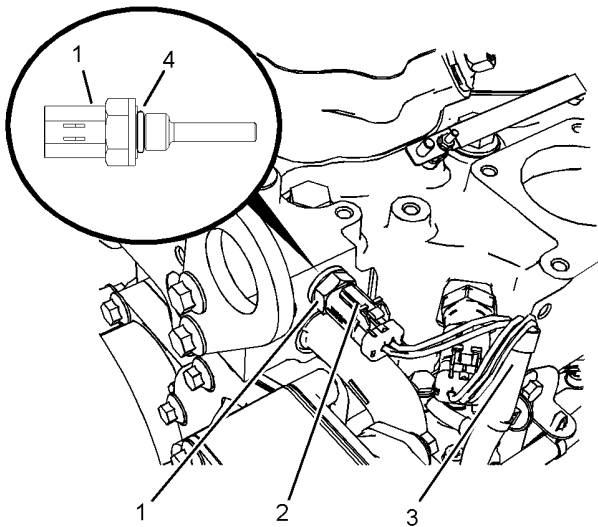


Illustration 338
Typical example

2. Slide locking tab (2) into the unlocked position.
 3. Disconnect harness assembly (3) from coolant temperature sensor (1).
- Note:** The coolant temperature sensor has a two-wire plug.
4. Use a deep socket to remove coolant temperature sensor (1) from the cylinder head.
- Note:** If necessary, remove the bracket for the harness assembly from the bypass tube.
5. Remove O-ring seal (4) from coolant temperature sensor (1).

Installation Procedure

Table 83

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

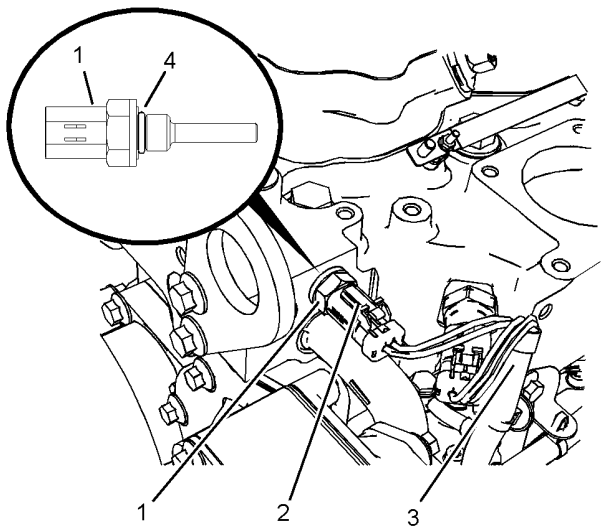


Illustration 339
Typical example

1. Install a new O-ring seal (4) to the groove in coolant temperature sensor (1). Lubricate the new O-ring seal with Tooling (A).
 2. Use a deep socket in order to install coolant temperature sensor (1) to the cylinder head. Tighten the coolant temperature sensor to a torque of 20 N·m (15 lb ft).
 3. Connect harness assembly (3) to coolant temperature sensor (1).
- Note:** If necessary, install the bracket for the harness assembly to the bypass tube.
4. Slide locking tab (2) into the locked position.
 5. Fill the cooling system to the correct level. Refer to Operation and Maintenance Manual, "Cooling System Coolant Level - Check" and refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct filling procedure.

i02933624

Engine Oil Pressure Sensor - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting, and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: The engine oil pressure sensor may be located in the cylinder block, on a plate or in the engine oil filter base. Ensure that the engine oil pressure sensor is installed in the correct position.

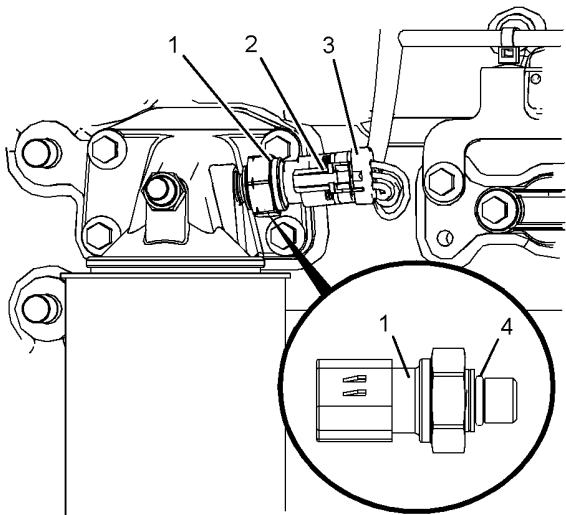


Illustration 340

g01480133

Typical example

1. Slide locking tab (2) into the unlocked position.
2. Disconnect harness assembly (3) from engine oil pressure sensor (1).

3. If necessary, remove the engine oil filter in order to gain access to engine oil pressure sensor (1). Refer to Operation and Maintenance Manual, "Engine Oil and Filter - Change".
4. If necessary, remove the dipstick tube in order to gain access to engine oil pressure sensor (1). Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
5. Use a deep socket to remove engine oil pressure sensor (1).
6. Remove O-ring seal (4) from engine oil pressure sensor (1).

Installation Procedure

Table 84

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The engine oil pressure sensor may be located in the cylinder block, on a blanking plate or in the engine oil filter base. Ensure that the engine oil pressure sensor is installed in the correct position.

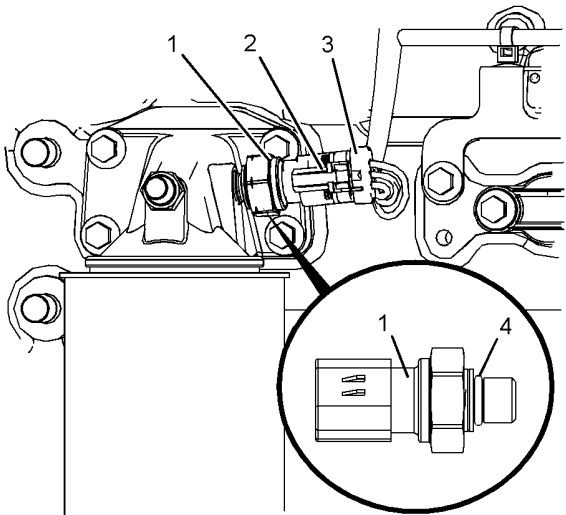


Illustration 341

g01480133

Typical example

1. Install a new O-ring seal (4) to the groove in engine oil pressure sensor (1). Lubricate the new O-ring seal with Tooling (A).
2. Use a deep socket to install engine oil pressure sensor (1). Tighten the engine oil pressure sensor to a torque of 10 N·m (89 lb in).
3. If necessary, install the engine oil filter. Refer to Operation and Maintenance Manual, "Engine Oil and Filter Change".
4. If necessary, install the dipstick tube. Refer to Disassembly and Assembly, "Engine Oil Pan - Remove and Install".
5. Connect harness assembly (3) to engine oil pressure sensor (1).
6. Slide locking tab (2) into the locked position.
7. If necessary, fill the engine oil pan to the correct level that is indicated on the engine oil level gauge. Refer to Operation and Maintenance Manual, "Engine Oil Level - Check".

i02933645

Fuel Pressure Sensor - Remove and Install

Removal Procedure

Table 85

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Seal Pick	1



WARNING

Contact with high pressure fuel may cause fluid penetration and burn hazards. High pressure fuel spray may cause a fire hazard. Failure to follow these inspection, maintenance and service instructions may cause personal injury or death.

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

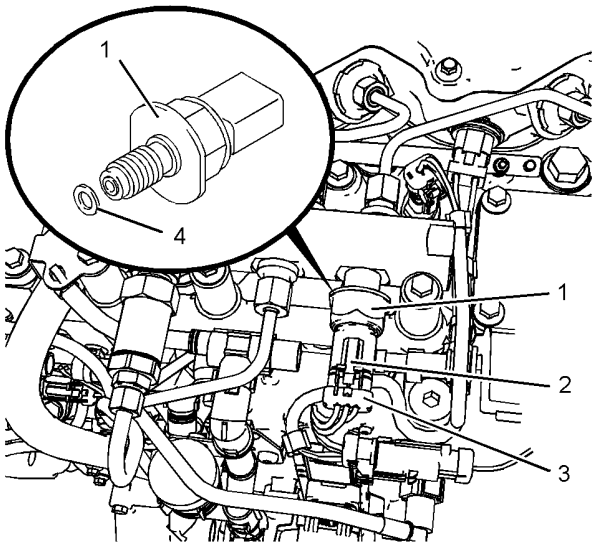


Illustration 342

g01459748

Typical example

1. Slide locking tab (2) into the unlocked position.
2. Disconnect harness assembly (3) from fuel pressure sensor (1).
3. Use a deep socket to remove fuel pressure sensor (1) from the fuel manifold.

Note: After the engine has stopped, allow the pressure to dissipate for 60 seconds before removing the fuel pressure sensor.

4. If necessary, use Tooling (A) in order to remove sealing washer (4) from the fuel manifold.

Note: Do not damage the seat for the washer in the fuel manifold. Ensure that no debris enters the fuel manifold during the removal of the sealing washer.

5. Plug the open port in the fuel manifold immediately with a new plug.

Installation Procedure

Table 86

Required Tools			
Tool	Part Number	Part Description	Qty
B	21825607	Angle gauge	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

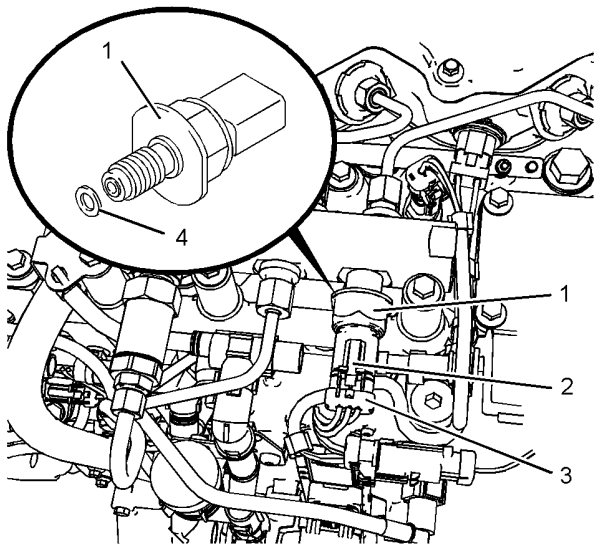


Illustration 343

g01459748

Typical example

1. Position a new sealing washer (4) onto fuel pressure sensor (1).
2. Remove the plug from the fuel manifold.

3. Install fuel pressure sensor (1) to the fuel manifold. Use a deep socket to tighten the fuel pressure sensor to a torque of 5 N·m (44 lb in). Use Tooling (B) to turn the fuel pressure sensor through an additional 120 degrees.

4. Connect harness assembly (3) to fuel pressure sensor (1).

5. Slide locking tab (2) into the locked position.

6. Remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

i02933592

Boost Pressure Sensor - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The boost pressure sensor may be located on the secondary fuel filter base or in the cylinder head.

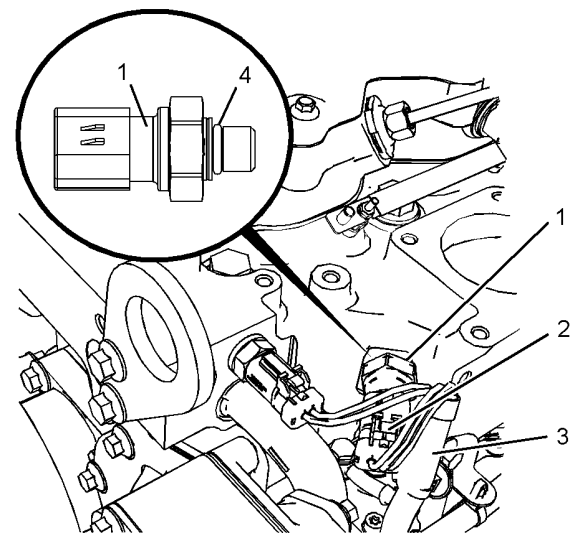


Illustration 344

g01480192

Typical example

1. Slide locking tab (2) into the unlocked position.
2. Disconnect harness assembly (3) from boost pressure sensor (1).

Note: The boost pressure sensor has a three-wire plug.

- 3. Use a deep socket to remove boost pressure sensor (1).

Note: If necessary, remove the bracket for the harness assembly from the bypass tube.

- 4. Remove O-ring seal (4) from boost pressure sensor (1).

Installation Procedure

Table 87

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: The boost pressure sensor may be located on the secondary fuel filter base or in the cylinder head.

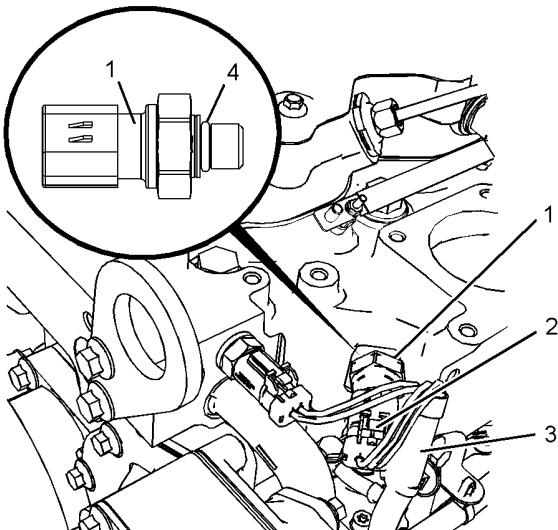


Illustration 345

g01480192

Typical example

- 1. Install a new O-ring seal (4) to the groove in boost pressure sensor (1). Lubricate the new O-ring seal with Tooling (A).
- 2. Use a deep socket to install boost pressure sensor (1). Tighten the boost pressure sensor to a torque of 10 N·m (89 lb in).

Note: If necessary, install the bracket for the harness assembly to the bypass tube.

- 3. Connect harness assembly (3) to boost pressure sensor (1).
- 4. Slide locking tab (2) into the locked position.

i02933659

Inlet Air Temperature Sensor - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

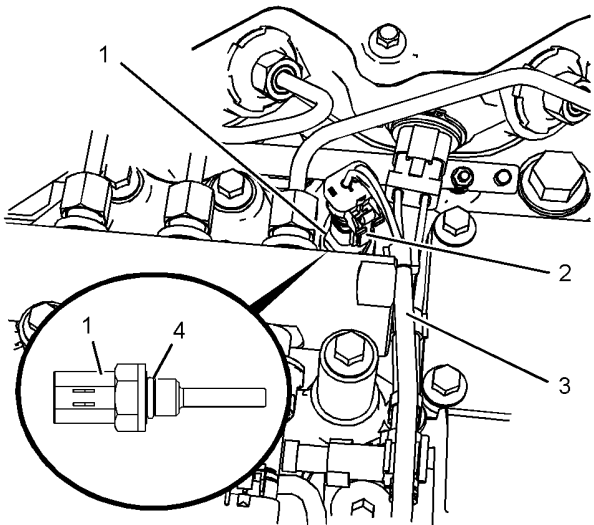


Illustration 346

g01480292

Typical example

- 1. Slide locking tab (2) into the unlocked position.
- 2. Disconnect harness assembly (3) from inlet air pressure sensor (1).

Note: The inlet air temperature sensor has a two wire plug.

- 3. Use a deep socket in order to remove inlet air temperature sensor (1) from the cylinder head.
- 4. Remove O-ring seal (4) from inlet air temperature sensor (1).

Installation Procedure

Table 88

Required Tools			
Tool	Part Number	Part Description	Qty
A	21820221	POWERPART Rubber Grease	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

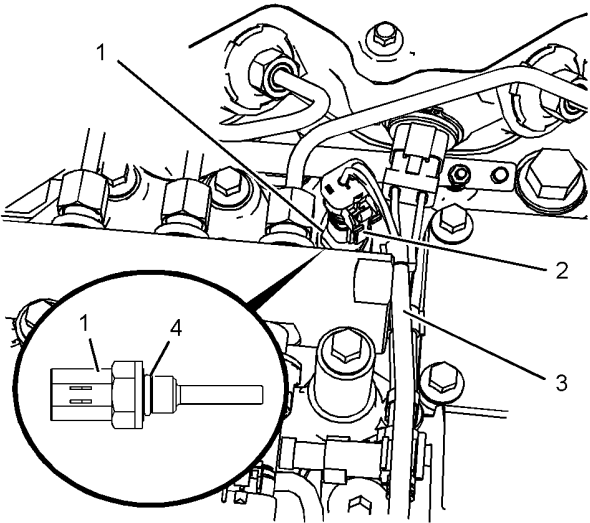


Illustration 347

g01480292

Typical example

1. Install a new O-ring seal (4) to the groove in inlet air temperature sensor (1). Lubricate the new O-ring seal with Tooling (A).
2. Install inlet air temperature sensor (1) to the cylinder head. Use a deep socket in order to tighten the inlet air temperature sensor to a torque of 20 N·m (15 lb ft).
3. Connect harness assembly (3) to inlet air temperature sensor (1).
4. Slide locking tab (2) into the locked position.

Glow Plugs - Remove and Install

i02933653

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Turn the battery disconnect switch to the OFF position.

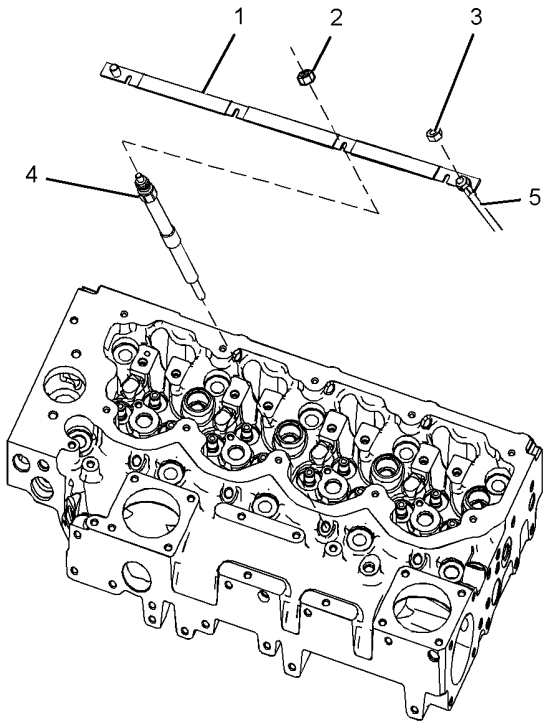


Illustration 348

g01245944

Typical example

2. Remove nut (3) and disconnect wire (5) from bus bar (1).
- Note:** The wire may be connected to either end of the bus bar. Note the position of the wire.
3. Remove nuts (2) that secure bus bar (1) to glow plugs (4).
 4. Remove bus bar (1) from glow plugs (4).
 5. Remove glow plugs (4) from the cylinder head.

Installation Procedure

Table 89

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610296	Torque Wrench	1

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Ensure that the threads of the glow plugs are clean and free from damage. Replace any damaged glow plugs.

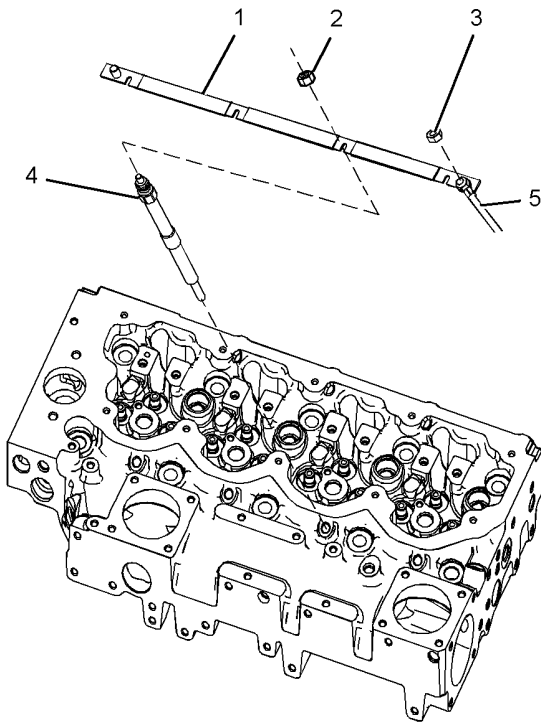


Illustration 349

g01245944

Typical example

2. Install glow plugs (4) into the cylinder head. Tighten the glow plugs to a torque of 15 N·m (132 lb in).
3. Position bus bar (1) onto glow plugs (4). Install nuts (2) onto the glow plugs. Use Tooling (A) in order to tighten the nuts to a torque of 2 N·m (17 lb in).
4. Connect wire (5) to the stud on bus bar (1).

Note: The wire may be connected to either end of the bus bar. Ensure that the wire is installed in the correct position.

5. Install nut (3) to the stud on bus bar (1). Tighten the nut to a torque of 6 N·m (53 lb in).
6. Turn the battery disconnect switch to the ON position.

i02933675

V-Belts - Remove and Install
(Engines Without an Automatic
Belt Tensioner)

Removal Procedure

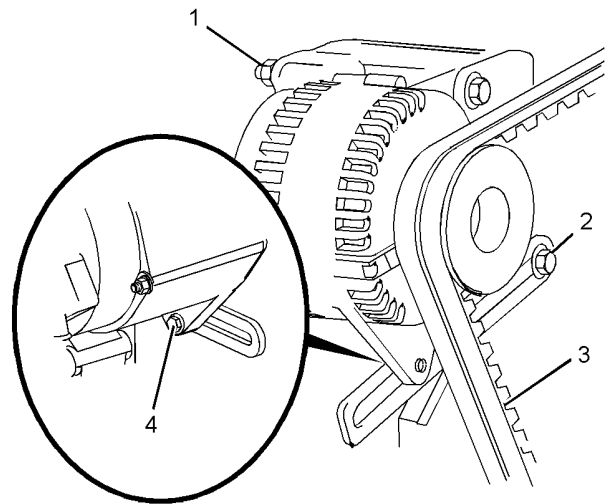


Illustration 350

g01401773

Typical example

1. If the engine is equipped with fan guards, remove the fan guards.
2. Loosen nut (1), bolt (2) and bolt (4). Slide the alternator toward the engine.
3. Remove V-belts (3).

Note: Mark the position and direction of rotation if the V-belts will be reused. Never replace single V-belts. Always replace V-belts as a pair.

Installation Procedure

Table 90

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Belt Tension Gauge	1

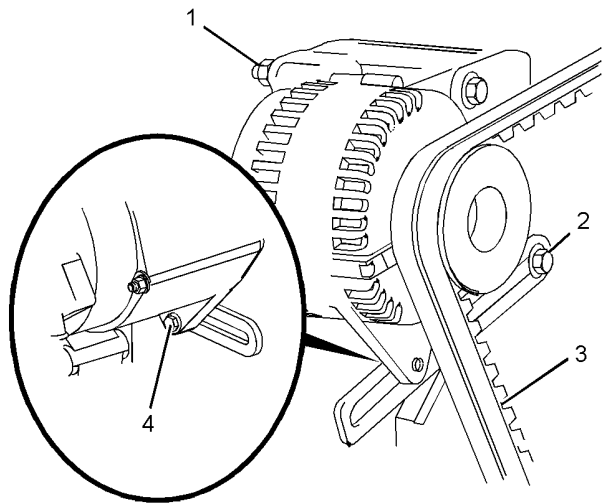


Illustration 351

g01401773

Typical example

1. Install V-belts (3) onto the correct pulleys.

Note: Used V-belts should be installed in the original position and direction of rotation.

2. Adjust the tension on the V-belts by moving the alternator away from the engine. Use Tooling (A) in order to achieve the correct belt tension. Refer to Specifications, "Belt Tension Chart" for more information. Tighten bolt (4) to a torque of 22 N·m (16 lb ft).

3. Tighten bolt (2) to a torque of 44 N·m (32 lb ft).

4. Tighten nut (1) to a torque of 22 N·m (16 lb ft).

5. If the engine is equipped with fan guards, install the fan guards.

Alternator Belt - Remove and Install (Engines With an Automatic Belt Tensioner)

i02933589

Removal Procedure

Table 91

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Locking Pin Ø 8mm by 85 mm	1

1. If the engine is equipped with fan guards, remove the fan guards.

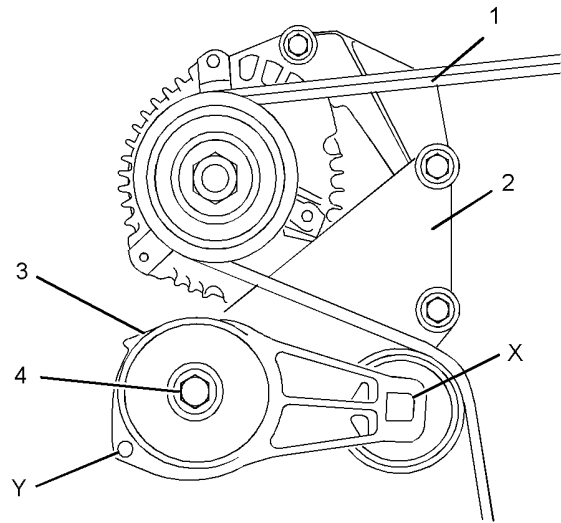


Illustration 352

g01260739

Typical example

2. Install a suitable square drive tool into Hole (X) in tensioner (3). From the front of the engine, turn the tool in a clockwise direction.

3. Insert Tooling (A) into Hole (Y). Release the pressure on the square drive tool.

4. Remove alternator belt (1).

Note: Mark the direction of rotation if the belt will be reused.

5. From the front of the engine, turn the square drive tool in a clockwise direction. Release the pressure on Tooling (A). Remove Tooling (A) from Hole (Y).

- 6. Release the pressure on the square drive tool and remove the tool from Hole (X).
- 7. If necessary, follow Step 7.a and Step 7.b in order to remove tensioner (3) from mounting bracket (2).
 - a. Remove bolt (4) that secures tensioner (3) to mounting bracket (2).
 - b. Remove tensioner (3) from mounting bracket (2).

Installation Procedure

Table 92

Required Tools			
Tool	Part Number	Part Description	Qty
A	-	Locking Pin Ø 8mm by 85 mm	1

- 3. Insert Tooling (A) into Hole (Y). Release the pressure on the square drive tool.
- 4. Install alternator belt (1). Ensure that the alternator belt is centered on pulley (5). A used alternator belt should be installed in the original direction of rotation.
- Note:** The ribs on the alternator belt must be located into the ribs of all pulleys.
- 5. From the front of the engine, turn the square drive tool in a clockwise direction. Release the pressure on Tooling (A). Remove Tooling (A) from Hole (Y).
- 6. Release the pressure on the square drive tool until the alternator belt is tensioned. Remove the tool from Hole (X).

Note: The tensioner should be at the nominal position.

- 7. If the engine is equipped with fan guards, install the fan guards.

i02933630

Fan - Remove and Install

Removal Procedure

Start By:

- a. If the engine is equipped with an automatic belt tensioner, remove the Alternator Belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install". If the engine is not equipped with an automatic belt tensioner, remove the V-Belts. Refer to Disassembly and Assembly, "V-Belts - Remove and Install".

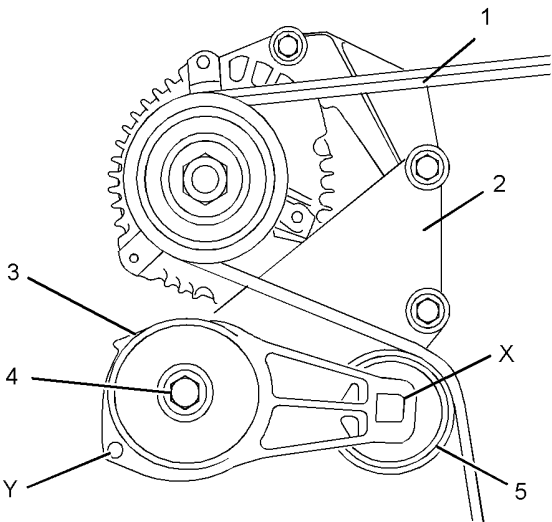


Illustration 353

g01270907

Typical example

- 1. If the tensioner was previously removed, follow Step 1.a through Step 1.c in order to install the tensioner.
 - a. Align the dowel in the back of tensioner (3) with the hole in mounting bracket (2).
 - b. Install tensioner (3) to mounting bracket (2).
 - c. Install bolt (4). Tighten the bolt to a torque of 44 N·m (32 lb ft).
- 2. Install a suitable square drive tool into Hole (X) in tensioner (1). From the front of the engine, turn the tool in a clockwise direction.

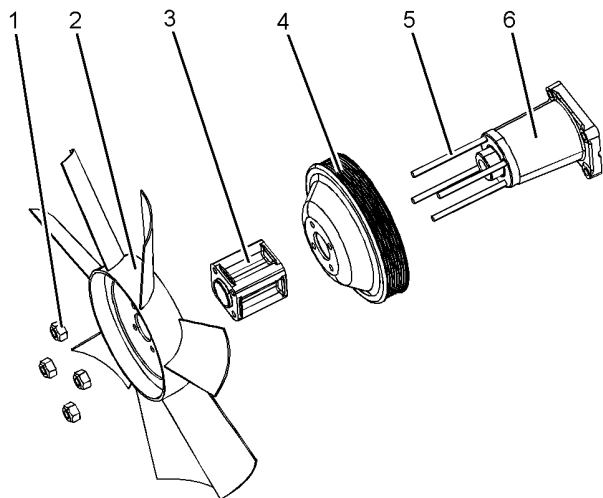


Illustration 354

g01270917

Typical example

1. Remove locking nuts (1).

2. Remove fan (2).

Note: Note the orientation of the fan.

3. Remove fan adapter (3).

4. Remove fan pulley (4).

5. If necessary, remove studs (5) from fan drive (6).

Installation Procedure

1. Ensure that all the components are free from wear or damage. If necessary, replace any components that are worn or damaged.

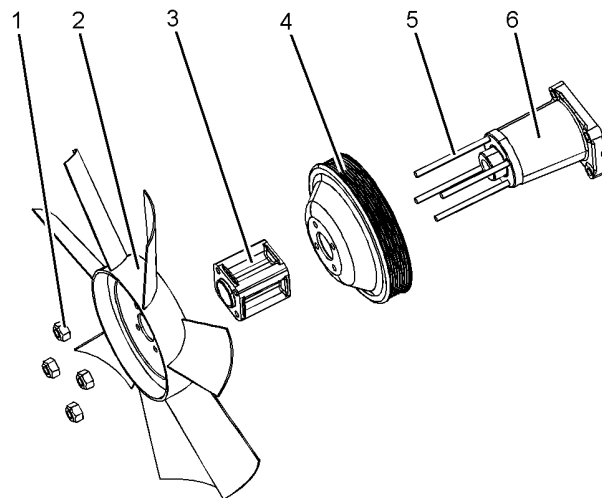


Illustration 355

g01270917

Typical example

2. If necessary, install studs (5) to fan drive (6).

3. Install fan pulley (4).

4. Install fan adapter (3).

5. Install fan (2).

Note: Ensure that the fan is correctly oriented.

6. Inspect the condition of locking nuts (1). If necessary, replace the locking nuts. Install locking nuts (1) and tighten to a torque of 22 N·m (16 lb ft).

End By:

a. If the engine is equipped with an automatic belt tensioner, install the Alternator Belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install". If the engine is not equipped with an automatic belt tensioner, install the V-Belts. Refer to Disassembly and Assembly, "V-Belts - Remove and Install".

i02933631

Fan Drive - Remove and Install

Removal Procedure

Start By:

a. Remove the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".

i02933616

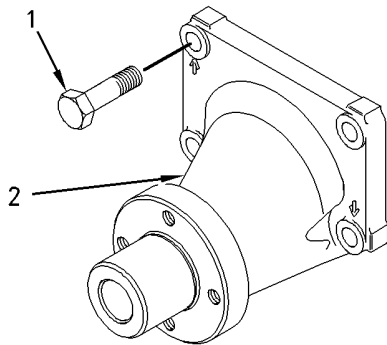


Illustration 356

g00944500

Typical example

1. Remove bolts (1) from fan drive (2).

Note: Identify the orientation and the position of the fan drive.

2. Remove fan drive (2).

Installation Procedure

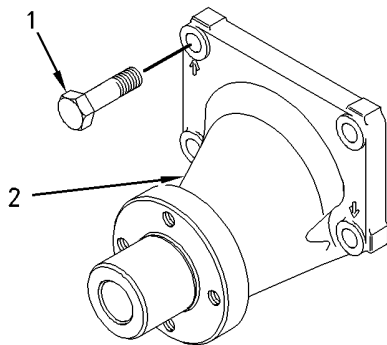


Illustration 357

g00944500

Typical example

1. Check the fan drive for wear or damage. The fan drive is not a serviceable item. If the fan drive is worn or damaged, replace the fan drive.

2. Install fan drive (2).

Note: Ensure the correct orientation of the fan drive.

3. Install bolts (1). Tighten the bolts to a torque of 44 N·m (32 lb ft).

End By:

- a. Install the fan. Refer to Disassembly and Assembly, "Fan - Remove and Install".

Electronic Control Module - Remove and Install

Removal Procedure

NOTICE

Ensure that all adjustments and repairs that are carried out to the fuel system are performed by authorized personnel that have the correct training.

Before beginning ANY work on the fuel system, refer to Operation and Maintenance Manual, "General Hazard Information and High Pressure Fuel Lines" for safety information.

Refer to Systems Operation, Testing and Adjusting Manual, "Cleanliness of Fuel System Components" for detailed information on the standards of cleanliness that must be observed during ALL work on the fuel system.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

Note: Put identification marks on all hoses, on all hose assemblies, on wires and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

Note: Some engines do not have a fuel supply to the electronic control module.

1. Turn the battery disconnect switch to the OFF position.
2. If the electronic control module is equipped with a fuel supply, turn the fuel supply to the OFF position.

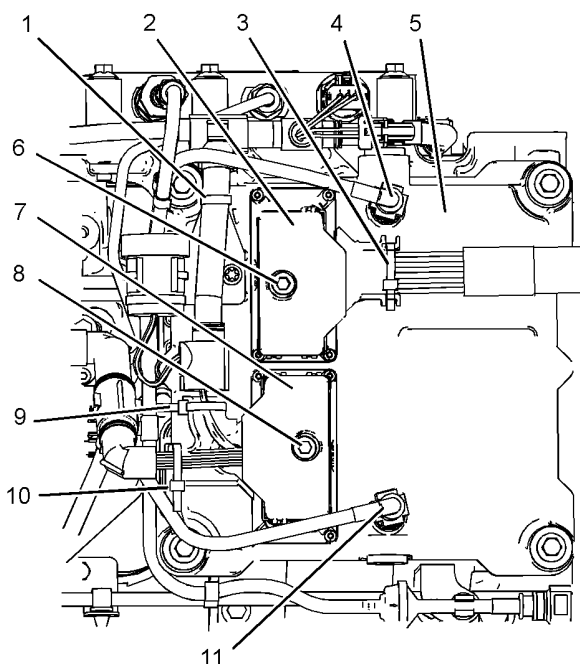


Illustration 358

g01271315

Typical example

3. Cut cable strap (3). Unscrew bolt (6) that secures machine wiring harness (2) to electronic control module (5). Disconnect the machine wiring harness from the electronic control module.
4. Cut cable straps (1), (9) and (10). Unscrew bolt (8) that secures engine harness (7) to electronic control module (5). Disconnect the engine harness from the electronic control module.
5. If the electronic control module is equipped with a fuel supply, disconnect plastic tube assembly (4) and plastic tube assembly (11).

Note: If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are plugged.

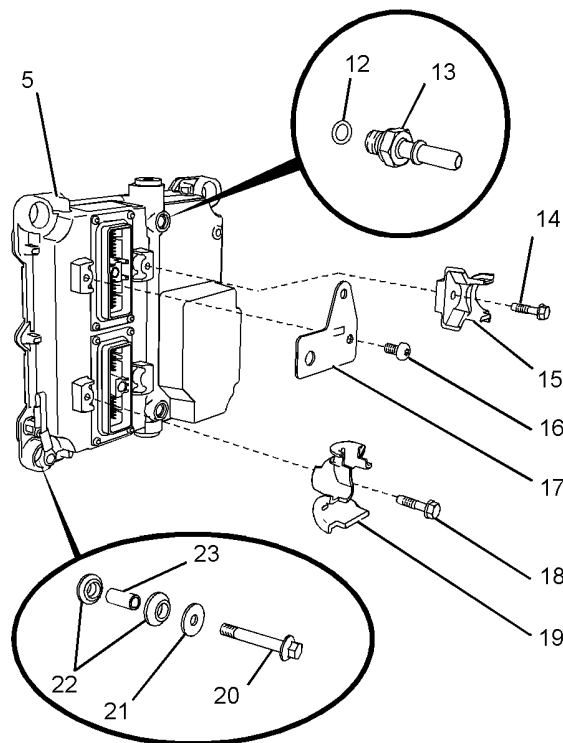


Illustration 359

g01807973

Typical example

6. Remove bolts (20) and remove the assembly of the electronic control module. Note the position of any brackets that are secured by bolts (20). Note the orientation of the electronic control module.
7. Remove bolts (20) and remove washers (18) from electronic control module (5). Note the position of the ground strap for the electronic control module.
8. If necessary, follow Step 8.a through Step 8.e in order to disassemble the electronic control module.
 - a. Remove isolation mounts (22) and spacers (23).
 - b. Remove connectors (13). Remove O-ring seals (12) from the connectors.
 - c. Remove bolt (18) and remove bracket (19) for the engine wiring harness. Note the orientation of the bracket.
 - d. Loosen bolt (16) and remove bracket (17) from the engine wiring harness. Note the orientation of the bracket.
 - e. Remove bolt (14) and remove bracket (15) for the machine wiring harness. Note the orientation of the bracket.

Installation Procedure

Table 93

Required Tools			
Tool	Part Number	Part Description	Qty
A	27610296	Torque Wrench	1

- 1. If a replacement electronic control module is installed, the module must be programmed with the correct information. Refer to Troubleshooting, “Replacing the ECM” and refer to Troubleshooting, “Flash Programming” for the correct procedure.
- 2. Ensure that the electronic control module is clean and free from damage. If necessary, replace the electronic control module.

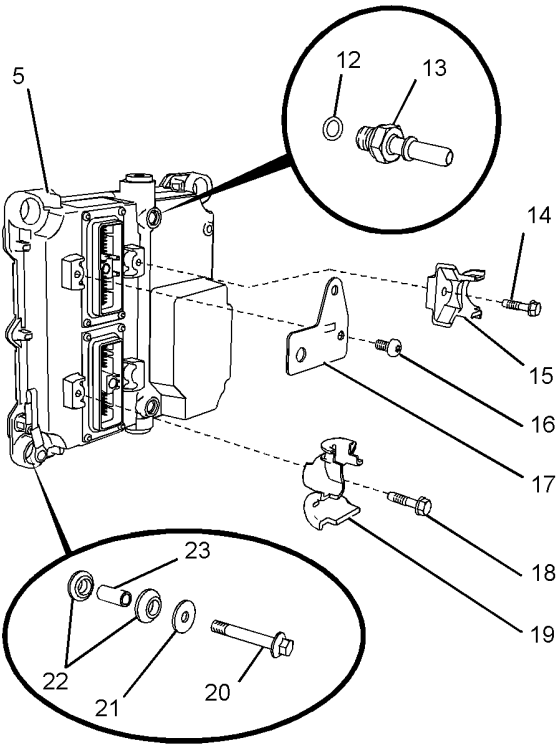


Illustration 360
Typical example

- 3. If necessary, follow Step 3.a through Step 3.e in order to assemble the electronic control module.
 - a. Install new O-ring seals (12) to connectors (13). Install connectors (13) to electronic control module (5). Tighten the connectors to a torque of 18 N·m (13 lb ft).
 - b. Position bracket (17) on electronic control module (5). Ensure that the bracket is correctly oriented. Install torx screw (16). Tighten the torx screw to a torque of 7 N·m (62 lb in).

- c. Position bracket (19) on electronic control module (5). Ensure that the bracket is correctly oriented. Install bolt (18). Tighten the bolt to a torque of 9 N·m (80 lb in).
- d. Position bracket (15) for the machine wiring harness on electronic control module (5). Ensure that the bracket is correctly oriented and install bolt (14). Tighten the bolt to a torque of 9 N·m (80 lb in).
- e. Install isolation mounts (22) and spacers (23) to electronic control module (5).

- 4. Install washers (21) and bolts (20) to electronic control module (5).

Note: Ensure that the ground strap for the electronic control module is clamped between the washer and the appropriate bolt.

- 5. Install the assembly of the electronic control module to the mounting bracket . Ensure that any brackets that are secured by bolts (20) are installed in the correct position. Tighten bolts (20) to a torque of 22 N·m (16 lb ft).

Note: Ensure that the electronic control module is correctly oriented. Ensure that the ground strap is not strained as the bolt is tightened.

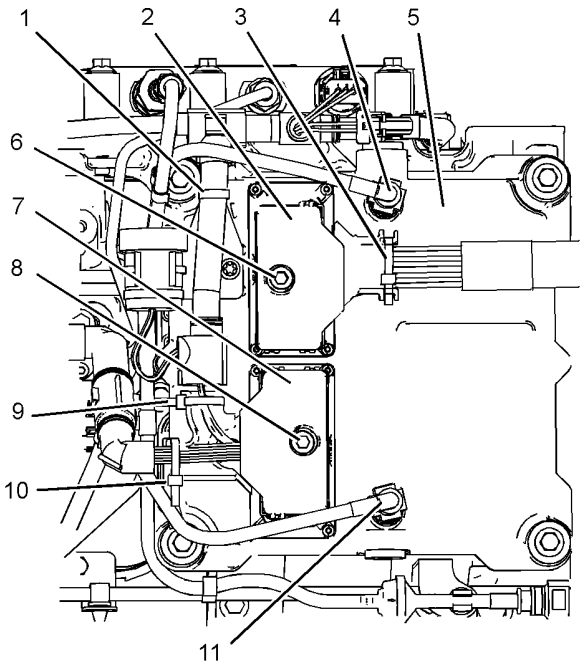


Illustration 361
Typical example

6. If the electronic control module is equipped with a fuel supply, connect plastic tube assembly (4) and tube assembly (11) to electronic control module (5).

Note: If the tube assemblies have quick fit connections, ensure that the connections are clean before the tube assemblies are connected.

7. Connect engine wiring harness (7) to electronic control module (5). Use Tooling (A) to tighten bolt (8) to a torque of 5 N·m (44 lb in). If the engine is equipped with a diagnostic connection, install the diagnostic connection to the support clip.

Note: Care must be taken in order to avoid damage to the connector pins during installation of the harness.

8. Position the assembly of the engine wiring harness onto bracket (15), bracket (17) and bracket (19). Use new cable straps (1), (9) and (10) in order to secure the harness assembly to the brackets.

9. Connect machine wiring harness (2) to electronic control module (5). Use Tooling (A) to tighten bolt (6) to a torque of 5 N·m (44 lb in).

Note: Care must be taken in order to avoid damage to the connector pins during installation of the harness.

10. Use a new cable strap (3) in order to secure the machine wiring harness (2).
11. If the electronic control module is equipped with a fuel supply, turn the fuel supply to ON position.
12. Turn the battery disconnect switch to the ON position.
13. If the electronic control module is equipped with a fuel supply, remove the air from the fuel system. Refer to Operation and Maintenance Manual, "Fuel System - Prime".

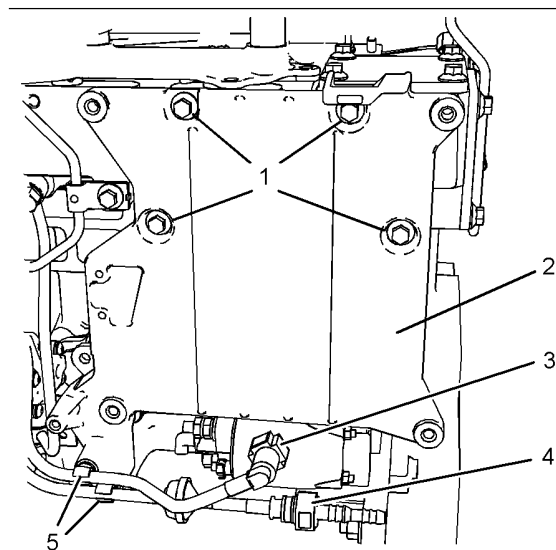


Illustration 362

g01254468

Typical example

1. Remove plastic tube assembly (3) and assembly (4) from clips (5).
2. Cut the cable strap and position the engine wiring harness away from mounting bracket (2).
3. Remove bolts (1) and remove mounting bracket (2) from the cylinder head.
4. If necessary, remove clips (5) from mounting bracket (2).

Installation Procedure

1. Ensure that the mounting bracket for the electronic control module is clean and free from damage. If necessary, replace the mounting bracket.

i02933614

ECM Mounting Bracket - Remove and Install

Removal Procedure

Start By:

- a. Remove the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".

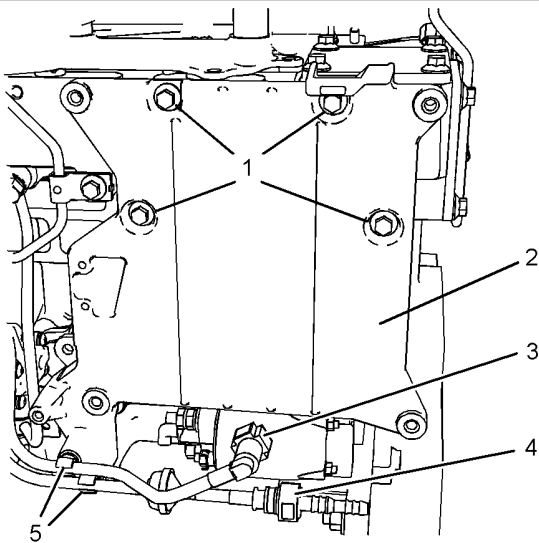


Illustration 363

g01254468

Typical example

2. If necessary, install clips (5) to mounting bracket (2).
3. Position mounting bracket (2) against the cylinder head. Install bolts (1). Tighten the bolts to a torque of 22 N·m (16 lb ft).
4. Position the engine wiring harness against mounting bracket (2). Secure the engine wiring harness with a new cable strap.
5. Install plastic tube assembly (3) and assembly (4) to clips (5).

End By:

- a. Install the electronic control module. Refer to Disassembly and Assembly, "Electronic Control Module - Remove and Install".

i02933588

Alternator - Remove (Engines Without an Automatic Belt Tensioner)

Removal Procedure

Start By:

- a. Remove the V-belts. Refer to Disassembly and Assembly, "V-belts - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Turn the battery disconnect switch to the OFF position.
2. Make temporary identification marks on the connections of the harness assembly.

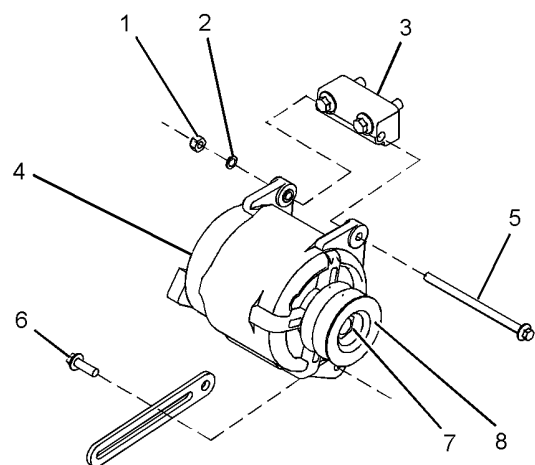


Illustration 364

g01255718

Typical Example

3. Disconnect the harness assembly from alternator (4).
4. Remove bolt (6) from alternator (4).
5. Remove nut (1) and washer (2). Remove bolt (5) from alternator (4). Remove alternator (4) from alternator bracket (3).
6. If necessary, remove pulley (8) from alternator (4). Follow Step 6.a and Step 6.b for the method in order to remove the pulley from the alternator.

Note: This method may not be suitable for some configurations of pulley.

- a. Hold the shaft of alternator (4) with an allen wrench. Use a cranked ring spanner (box wrench) in order to loosen nut (7).
- b. Remove nut (7) and pulley (8) from alternator (4).

i02933586

Alternator - Remove (Engines With an Automatic Belt Tensioner)

Removal Procedure

Start By:

- a. Remove the alternator belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Turn the battery disconnect switch to the OFF position.
2. Make temporary identification marks on the connections of the harness assembly.

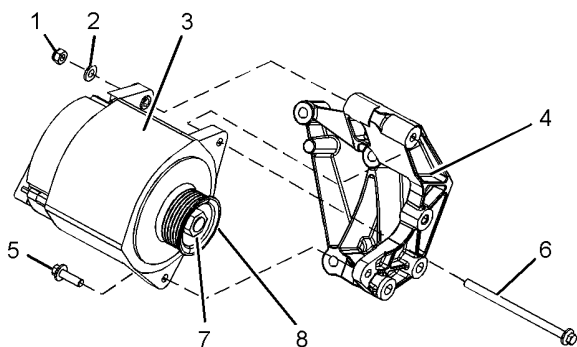


Illustration 365

g01271317

Typical example

3. Disconnect the harness assembly from alternator (3).
4. Remove bolt (5) from alternator (3).
5. Remove nut (1) and washer (2). Remove bolt (6) from alternator (3). Remove the alternator from alternator bracket (4).
6. If necessary, follow Step 6.a and Step 6.b in order to remove pulley (8) from alternator (1).
 - a. Hold the shaft of alternator (3) with an allen wrench. Use a cranked ring spanner (box wrench) in order to loosen nut (7).

- b. Remove nut (7) and pulley (8) from alternator (3).

i02933587

Alternator - Install (Engines Without an Automatic Belt Tensioner)

Installation Procedure

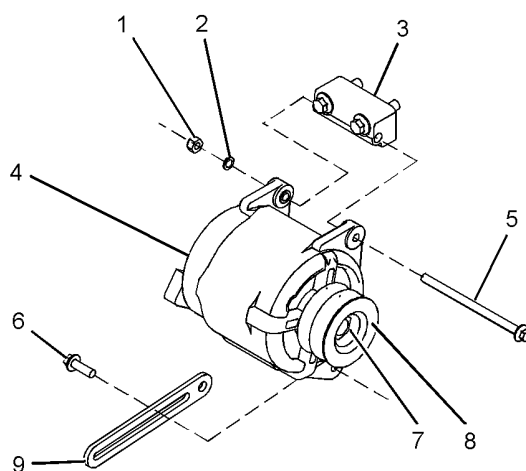


Illustration 366

g01263045

Typical example

1. If necessary, install the pulley to the alternator. Follow Step 1.a and Step 1.b in order to install the pulley to the alternator.

Note: This method may not be suitable for some configurations of pulley.

- a. Install pulley (8) and nut (7) to the shaft of alternator (4).
- b. Hold the shaft of the alternator with an allen wrench. Use a cranked ring spanner (box wrench) in order to tighten nut (7). Tighten the nut to a torque of 80 N·m (59 lb ft).
2. Install alternator (4) to bracket (3) and install bolt (5) to alternator (4).
3. Install washer (2) and nut (1) to bolt (5) finger tight.
4. Install bolt (6) through adjusting link (9) to alternator (4) finger tight.

5. Install the V-belts. Refer to Disassembly and assembly, "V-belts - Remove and Install" for the correct procedure.
6. Tighten nut (1) and bolt (6) to a torque of 22 N·m (16 lb ft).
7. Connect the wiring harness assembly to alternator (4).
8. Turn the battery disconnect switch to the ON position.

i02933585

Alternator - Install (Engines With an Automatic Belt Tensioner)

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

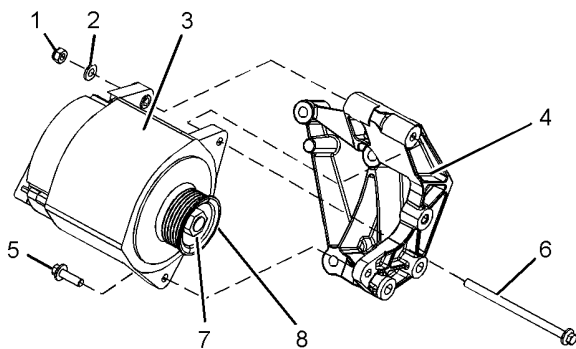


Illustration 367

g01271317

Typical example

1. If necessary, install pulley (8) and nut (7) to alternator (3). Hold the shaft of the alternator with an allen wrench. Use a cranked ring spanner (box wrench) in order to tighten nut (7).

Note: Different types of alternator have different sizes of nut. Ensure that the correct torque value is used for the nut.

Tighten M16 and M17 nuts to a torque of 80 N·m (59 lb ft). Tighten 5/8 inch - 18 UNF nuts to a torque of 102 N·m (75 lb ft).

2. Position alternator (3) on alternator mounting bracket (4).
3. Install bolt (6) to alternator (3). Install washer (2) and nut (1) to bolt (6).
4. Install bolt (5) to alternator (3).
5. Tighten nut (1) and bolt (5) to a torque of 22 N·m (16 lb ft).
6. Connect the wiring harness assembly to alternator (3).
7. Install the alternator belt. Refer to Disassembly and Assembly, "Alternator Belt - Remove and Install".
8. Turn the battery disconnect switch to the ON position.

i02933615

Electric Starting Motor - Remove and Install

Removal Procedure

WARNING

Accidental engine starting can cause injury or death to personnel working on the equipment.

To avoid accidental engine starting, disconnect the battery cable from the negative (-) battery terminal. Completely tape all metal surfaces of the disconnected battery cable end in order to prevent contact with other metal surfaces which could activate the engine electrical system.

Place a Do Not Operate tag at the Start/Stop switch location to inform personnel that the equipment is being worked on.

1. Turn the battery disconnect switch to the OFF position.
2. If necessary, remove the hose for the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".
3. Make temporary identification marks on the harness assemblies that are connected to the electric starting motor and to the solenoid.

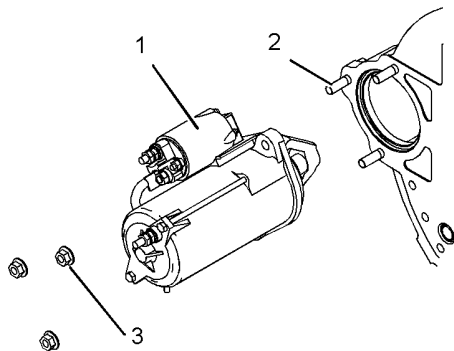


Illustration 368
Typical example

4. Disconnect the harness assemblies from the electric starting motor and from the solenoid.
 5. Remove nuts (3) from electric starting motor (1).
- Note:** Support the weight of the electric starting motor as the nuts are removed.
6. Remove electric starting motor (1).
 7. If necessary, remove studs (2).

Installation Procedure

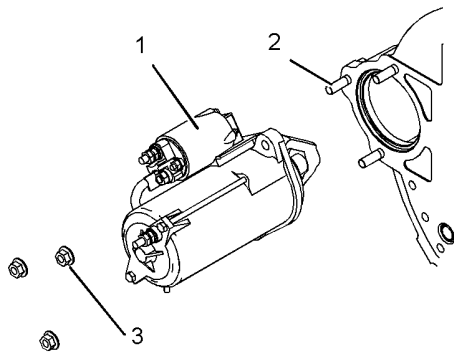


Illustration 369
Typical example

1. If necessary, install studs (2).
 2. Align electric starting motor (1) to studs (2). Install the electric starting motor.
 3. Install nuts (3).
- Tighten M10 nuts to a torque of 44 N·m (32 lb ft).
- Tighten M12 nuts to a torque of 78 N·m (57 lb ft).
4. Connect the harness assemblies to the electric starting motor and the solenoid.

5. If necessary, install the hose for the crankcase breather. Refer to Disassembly and Assembly, "Crankcase Breather - Remove and Install".
6. Turn the battery disconnect switch to the ON position.

i02933584

Air Compressor - Remove and Install

Removal Procedure

Table 94

Required Tools			
Tool	Part Number	Part Description	Qty
A ⁽¹⁾	21825576	Crankshaft Turning Tool	1
A ⁽²⁾	27610291	Barring Device Housing	1
	27610289	Gear	1
B	27610211	Crankshaft Timing Pin	1
C	-	Puller (Three Leg)	1

(1) The Crankshaft Turning Tool is used on the front pulley.
(2) This Tool is used in the aperture for the electric starting motor.

Note: Either Tooling (A) can be used. Use the Tooling that is most suitable.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: Put identification marks on all hoses, on all hose assemblies and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

⚠ WARNING

Do not disconnect the air lines until the air pressure in the system is at zero. If hose is disconnected under pressure it can cause personal injury.

1. Release the pressure from the air system.
2. Drain the coolant from the cooling system into a suitable container for storage or for disposal. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct draining procedure.
3. Remove the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".
4. If the engine is equipped with a hydraulic pump on the rear of the air compressor, remove the hydraulic pump.
5. Use Tooling (A) in order to rotate the crankshaft so that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Centre Position for No.1 Piston".

Note: The air compressor must be timed with the engine in order to minimize engine vibration.

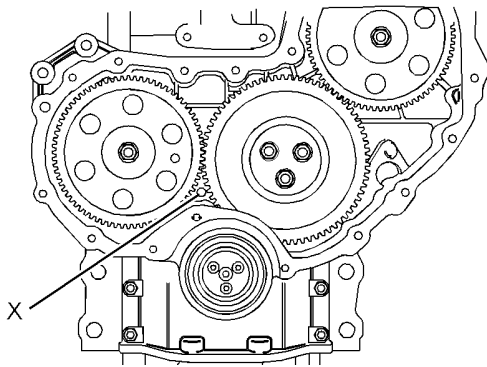


Illustration 370

g01272266

Typical example

6. Install Tooling (B) through Hole (X) in the front housing. Use Tooling (B) in order to lock the crankshaft.

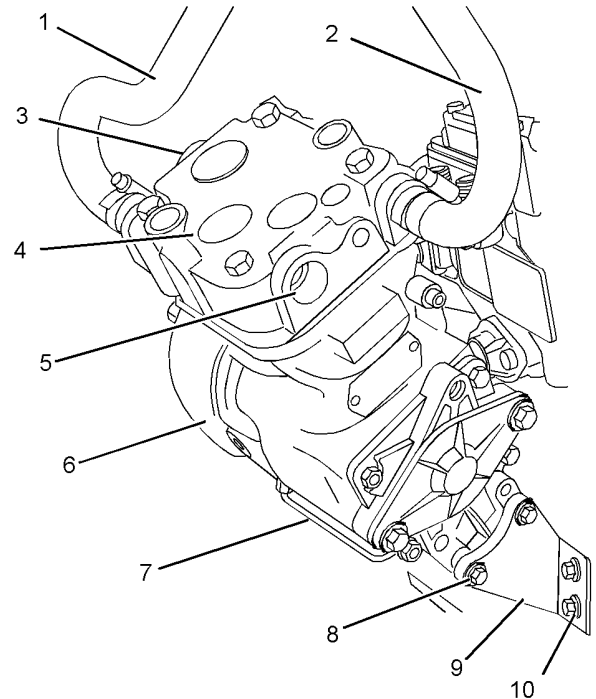


Illustration 371

g01250794

Typical example

7. Disconnect coolant hoses (1) and (2) from air compressor (4).
8. Disconnect the air lines from ports (3) and (5).
9. Remove tube assembly (7) from air compressor (4) and from the cylinder block.
10. Remove bolts (8) and (10) from support bracket (9) and remove the support bracket.

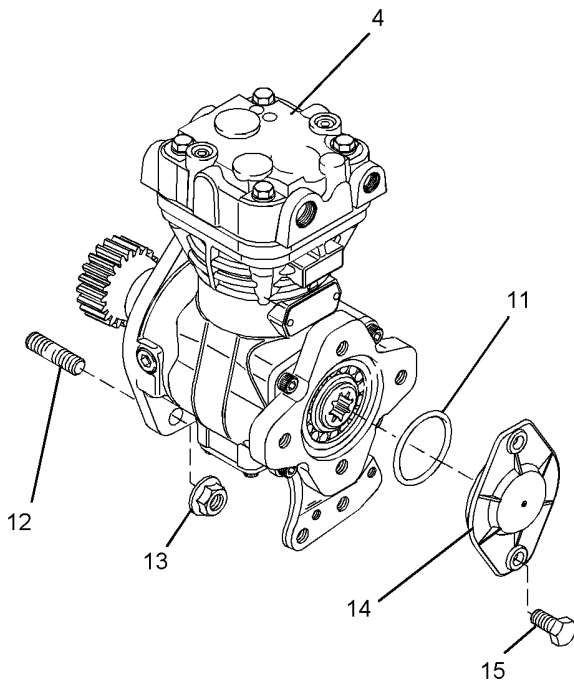


Illustration 372

g01250816

Typical example

- 11. Support air compressor (4). Remove nuts (13) and remove the air compressor from front housing (6).**

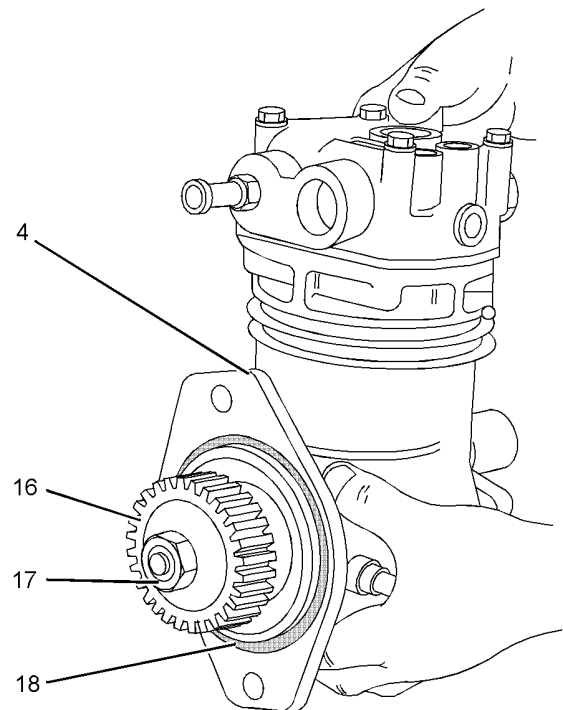


Illustration 373

g01250889

Typical example

- 12.** Remove O-ring seal (18) from air compressor (4).
- 13.** If necessary, remove bolts (15) and remove plate (14). Remove O-ring seal (11) from plate (14). Refer to Illustration 372.
- 14.** If necessary, remove nut (17) and remove the spring washer. Use Tooling (C) in order to remove gear (16) from the crankshaft of the air compressor.

Installation Procedure

Table 95

Required Tools			
Tool	Part Number	Part Description	Qty
B	27610211	Crankshaft Timing Pin	1
D	21826051	POWERPART High Strength Retainer	-
E	21820221	POWERPART Rubber Grease	-

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Dispose of all fluids according to local regulations and mandates.

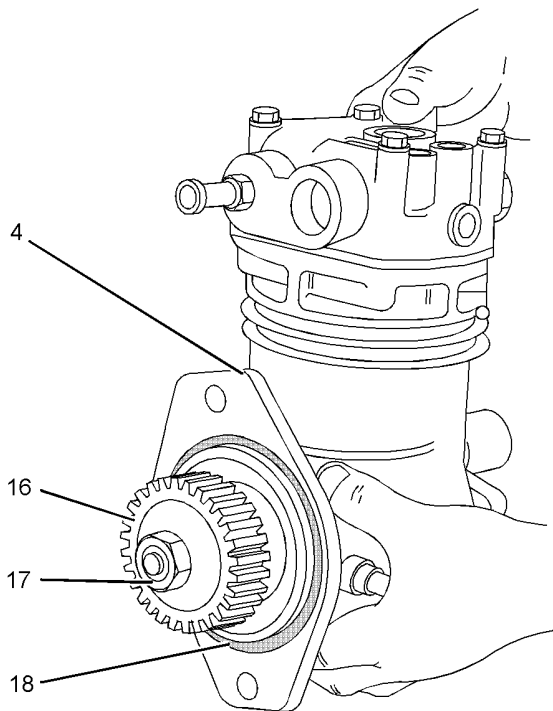


Illustration 374

g01250889

Typical example

1. If necessary, follow Step 1.a through Step 1.b in order to install the gear to the air compressor.
 - a. Ensure that the shaft of air compressor (4) is clean and dry. Ensure that gear (16) is clean and free from damage.
 - b. Install gear (16) and a new spring washer to the shaft of the air compressor.
 - c. Apply Tooling (D) to the threads of the shaft. Install nut (17) to the shaft of air compressor (4). Tighten the nut to a torque of 120 N·m (89 lb ft).
2. Install the O-ring seal to air compressor (4). Use Tooling (E) in order to lubricate the O-ring seal.

3. Ensure that number one piston is at the top center position on the compression stroke. Refer to Systems Operation, Testing and Adjusting, "Finding Top Center Position for No. 1 Piston".

Note: The air compressor must be timed with the engine in order to minimize engine vibration.

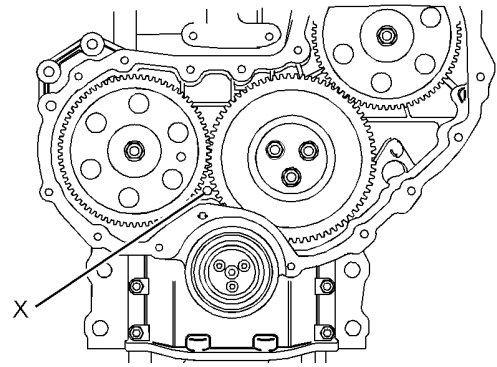


Illustration 375

g01272266

Typical example

4. Ensure that Tooling (B) is installed in Hole (X) in the front housing. Use Tooling (B) in order to lock the crankshaft in the correct position.

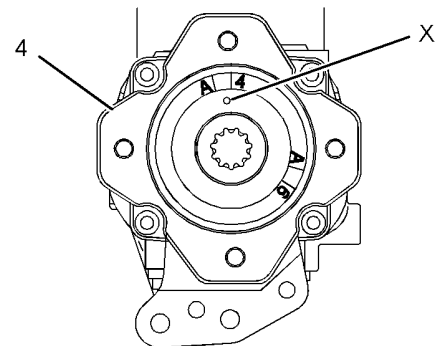


Illustration 376

g01250968

Typical air compressor with a SAE drive

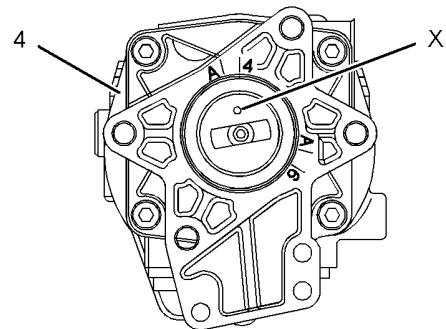


Illustration 377

g01251223

Typical air compressor with a DIN drive

5. Rotate the crankshaft of the air compressor until timing Mark (X) is aligned with timing mark A4 on the rear face of air compressor (4). Refer to Illustration 376 for air compressors with a SAE drive. Refer to Illustration 377 for air compressors with a DIN drive.

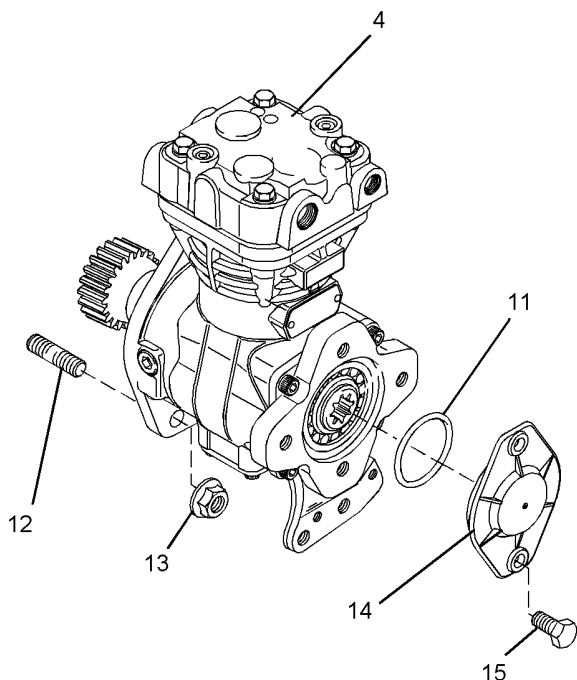


Illustration 378

g01250816

Typical example

6. Align air compressor (4) with studs (12). Install the air compressor to the front housing. If necessary, rotate the crankshaft of the air compressor in a clockwise direction in order to align the gears.

Note: Ensure that timing Mark (X) is aligned with timing mark A4. Refer to Illustration 376 for air compressors with a SAE drive. Refer to Illustration 377 for air compressors with a DIN drive.

7. Install nuts (13). Tighten the nuts to a torque of 78 N·m (58 lb ft).
8. If necessary, follow Step 8.a through Step 8.c in order to install cover (14).
 - a. Install a new O-ring seal (11) to cover (14). Use Tooling (E) in order to lubricate the O-ring seal.
 - b. Install cover (14) to air compressor (4).
 - c. Install bolts (15). Tighten the bolts to a torque of 13 N·m (9.5 lb ft).

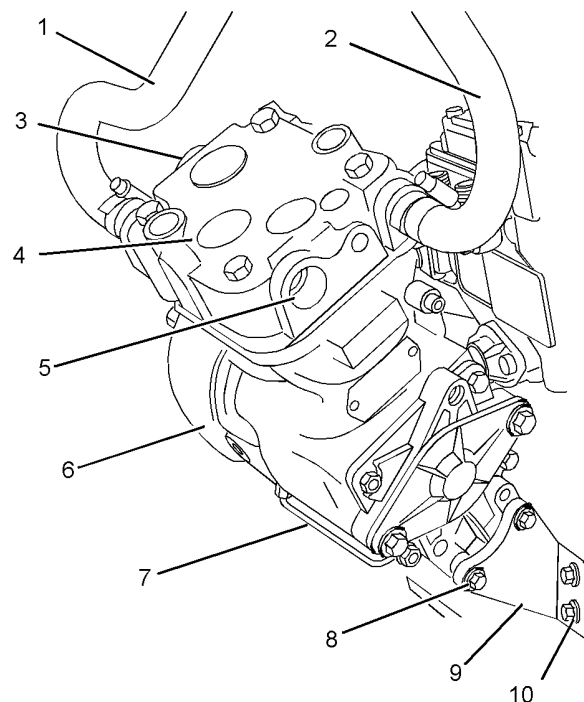


Illustration 379

g01250794

Typical example

9. Position support bracket (9) onto air compressor (4). Install bolts (8) finger tight.

10. Install bolts (10) finger tight.

11. Tighten bolts (8) to a torque of 22 N·m (16 lb ft). Tighten bolts (10) to a torque 22 N·m (16 lb ft).

Note: Ensure that the air compressor is not stressed as the bolts are tightened.

12. Install tube assembly (7) to air compressor (4) and to the cylinder block. Tighten the nuts to a torque of 9 N·m (80 lb in).

13. Remove Tooling (B) from Hole (X) in the front housing.

14. Install the front cover. Refer to Disassembly and Assembly, "Front Cover - Remove and Install".

15. If the engine is equipped with a hydraulic pump on the rear of the air compressor, install the hydraulic pump.

16. Connect the air lines to ports (3) and (5) in the air compressor.

17. Connect coolant hoses (1) and (2) to air compressor (4).

18. Fill the cooling system with coolant to the correct level. Refer to Operation and Maintenance Manual, "Cooling System Coolant - Change" for the correct procedure.

i02933676

Vacuum Pump - Remove and Install

Removal Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

Note: Put identification marks on all hoses, on all hose assemblies and on all tube assemblies for installation purposes. Plug all hose assemblies and tube assemblies. This helps to prevent fluid loss and this helps to keep contaminants from entering the system.

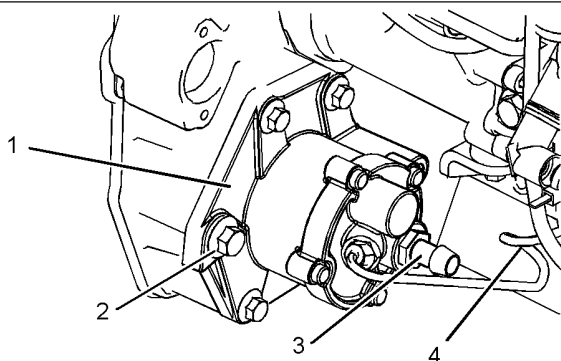


Illustration 380

g01254510

Typical example

1. Remove tube assembly (4) from vacuum pump (1) and from the cylinder block.
2. Disconnect the vacuum line from connector (3) on the vacuum pump.
3. Remove bolts (2). Remove vacuum pump (1) from the front housing.
4. Remove the gasket.

Installation Procedure

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

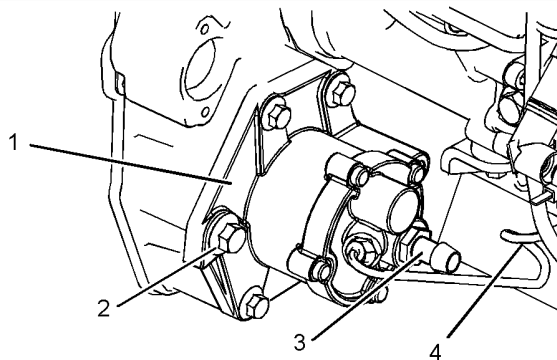


Illustration 381

g01254510

Typical example

1. Ensure that the vacuum pump is clean and free from damage. If necessary, replace the vacuum pump.
2. Clean the surfaces on the front housing.
3. Install a new gasket to vacuum pump (1).
4. Install vacuum pump (1) to the front housing. If necessary, rotate the shaft of the vacuum pump in order to align the gears.
5. Install bolts (2).

Tighten M8 bolts to a torque of 22 N·m (16 lb ft).

Tighten M10 bolts to a torque of 44 N·m (32 lb ft).
6. Connect the vacuum line to connector (3).
7. Install tube assembly (4) to vacuum pump (1) and to the cylinder block. Tighten the nuts on the tube assembly to a torque of 9 N·m (80 lb in).

Index

A

Accessory Drive - Assemble.....	92
Assembly Procedure.....	92
Accessory Drive - Disassemble.....	92
Disassembly Procedure.....	92
Accessory Drive - Install.....	93
Installation Procedure.....	93
Accessory Drive - Remove.....	91
Removal Procedure.....	91
Air Compressor - Remove and Install.....	172
Installation Procedure.....	174
Removal Procedure.....	172
Alternator - Install (Engines With an Automatic Belt Tensioner).....	171
Installation Procedure.....	171
Alternator - Install (Engines Without an Automatic Belt Tensioner).....	170
Installation Procedure.....	170
Alternator - Remove (Engines With an Automatic Belt Tensioner).....	170
Removal Procedure.....	170
Alternator - Remove (Engines Without an Automatic Belt Tensioner).....	169
Removal Procedure.....	169
Alternator Belt - Remove and Install (Engines With an Automatic Belt Tensioner).....	162
Installation Procedure.....	163
Removal Procedure.....	162

B

Balancer - Install.....	126
Assembly Procedure.....	126
Installation Procedure.....	127
Balancer - Remove.....	124
Disassembly Procedure.....	126
Removal Procedure.....	124
Bearing Clearance - Check.....	152
Measurement Procedure.....	152
Boost Pressure Sensor - Remove and Install.....	158
Installation Procedure.....	159
Removal Procedure.....	158

C

Camshaft - Remove and Install.....	113
Installation Procedure.....	114
Removal Procedure.....	113
Camshaft Bearings - Remove and Install.....	117
Installation Procedure.....	118
Removal Procedure.....	117
Camshaft Gear - Remove and Install.....	115
Installation Procedure.....	116
Removal Procedure.....	115
Connecting Rod Bearings - Install (Connecting rods in position).....	137
Installation Procedure.....	137

Connecting Rod Bearings - Remove (Connecting rods in position).....	136
Removal Procedure.....	136
Coolant Temperature Sensor - Remove and Install.....	154
Installation Procedure.....	155
Removal Procedure.....	154
Crankcase Breather - Remove and Install (Filtered Breather).....	94
Installation Procedure.....	95
Removal Procedure.....	94
Crankcase Breather - Remove and Install (Unfiltered Breather).....	96
Installation Procedure.....	96
Removal Procedure.....	96
Crankshaft - Install.....	146
Installation Procedure.....	146
Crankshaft - Remove.....	143
Removal Procedure.....	143
Crankshaft Front Seal - Remove and Install.....	72
Installation Procedure.....	73
Removal Procedure.....	72
Crankshaft Gear - Remove and Install.....	150
Installation Procedure.....	151
Removal Procedure.....	150
Crankshaft Main Bearings - Remove and Install (Crankshaft in position).....	139
Installation Procedure.....	141
Removal Procedure.....	139
Crankshaft Position Sensor - Remove and Install.....	153
Installation Procedure.....	153
Removal Procedure.....	153
Crankshaft Pulley - Remove and Install (Engines With an Automatic Belt Tensioner).....	70
Installation Procedure.....	71
Removal Procedure.....	70
Crankshaft Pulley - Remove and Install (Engines Without an Automatic Belt Tensioner).....	71
Installation Procedure.....	72
Removal Procedure.....	71
Crankshaft Rear Seal - Install.....	67
Installation Procedure.....	67
Crankshaft Rear Seal - Remove.....	66
Removal Procedure.....	66
Crankshaft Timing Ring - Remove and Install.....	149
Installation Procedure.....	150
Removal Procedure.....	149
Cylinder Head - Install.....	109
Installation Procedure.....	109
Cylinder Head - Remove.....	105
Removal Procedure.....	105

D

Disassembly and Assembly Section.....	5
---------------------------------------	---

E

ECM Mounting Bracket - Remove and Install.....	168
Installation Procedure	168
Removal Procedure	168
Electric Starting Motor - Remove and Install	171
Installation Procedure	172
Removal Procedure	171
Electronic Control Module - Remove and Install..	165
Installation Procedure	167
Removal Procedure	165
Electronic Unit Injector - Install	30
Alternative Installation Procedure	33
Installation Procedure	30
Electronic Unit Injector - Remove	26
Alternative Removal Procedure	29
Removal Procedure	26
Engine Oil Cooler - Install.....	55
Installation Procedure	55
Engine Oil Cooler - Remove.....	54
Removal Procedure	54
Engine Oil Filter Base - Remove and Install.....	52
Installation Procedure	53
Removal Procedure	52
Engine Oil Pan - Remove and Install (Aluminum and Pressed Steel Oil Pans).....	119
Installation Procedure	120
Removal Procedure	119
Engine Oil Pan - Remove and Install (Cast Iron Oil Pan)	121
Installation Procedure	123
Removal Procedure	121
Engine Oil Pressure Sensor - Remove and Install	156
Installation Procedure	156
Removal Procedure	156
Engine Oil Pump - Remove and Install (Engines Without a Balancer Unit).....	58
Installation Procedure	59
Removal Procedure	58
Engine Oil Relief Valve - Remove and Install (Engines with a Balancer Unit).....	56
Installation Procedure	56
Removal Procedure	56
Engine Oil Relief Valve - Remove and Install (Engines Without a Balancer Unit).....	57
Installation Procedure	58
Removal Procedure	57
Exhaust Elbow - Remove and Install.....	45
Installation Procedure	46
Removal Procedure	45
Exhaust Manifold - Remove and Install (Side Mounted Exhaust Manifold).....	44
Installation Procedure (Side Mounted Exhaust Manifold)	45
Removal Procedure	44
Exhaust Manifold - Remove and Install (Top Mounted Exhaust Manifold)	42
Installation Procedure (Top Mounted Exhaust Manifold)	43
Removal Procedure	42

F

Fan - Remove and Install	163
Installation Procedure	164
Removal Procedure	163
Fan Drive - Remove and Install.....	164
Installation Procedure	165
Removal Procedure	164
Flywheel - Install.....	65
Installation Procedure	65
Flywheel - Remove.....	64
Removal Procedure	64
Flywheel Housing - Remove and Install	68
Installation Procedure	69
Removal Procedure	68
Front Cover - Remove and Install.....	73
Installation Procedure	74
Removal Procedure	73
Fuel Filter Base - Remove and Install (Secondary Fuel Filter).....	8
Installation Procedure	9
Removal Procedure	8
Fuel Injection Lines - Install	17
Installation Procedure	17
Fuel Injection Lines - Remove	16
Removal Procedure	16
Fuel Injection Pump - Install	21
Installation Procedure	21
Fuel Injection Pump - Remove	18
Removal Procedure	18
Fuel Injection Pump Gear - Install	25
Installation Procedure	25
Fuel Injection Pump Gear - Remove	23
Removal Procedure	23
Fuel Manifold (Rail) - Remove and Install	13
Installation Procedure	14
Removal Procedure	13
Fuel Pressure Sensor - Remove and Install.....	157
Installation Procedure	158
Removal Procedure	157
Fuel Priming Pump - Remove and Install (Electric Fuel Priming Pump).....	5
Installation Procedure	5
Removal Procedure	5
Fuel Priming Pump - Remove and Install (Manual Priming Pump).....	6
Installation Procedure	7
Removal Procedure	6
Fuel Transfer Pump - Install	11
Installation Procedure	11
Fuel Transfer Pump - Remove	9
Removal Procedure	9

G

Gear Group (Front) - Remove and Install.....	75
Installation Procedure	76
Removal Procedure	75
Glow Plugs - Remove and Install	160
Installation Procedure	161
Removal Procedure	160

H

Housing (Front) - Install	89
Installation Procedure	89
Housing (Front) - Remove	87
Removal Procedure	87

I

Idler Gear - Install	82, 84–85
Installation Procedure (Heavy-Duty Idler Gear) ..	82
Installation Procedure (Latest Heavy-Duty Idler Gear)	85
Installation Procedure (Standard Idler Gear)	84
Idler Gear - Remove	78–79, 81
Removal Procedure (Early Heavy-Duty Idler Gear)	78
Removal Procedure (Latest Heavy-Duty Idler Gear)	81
Removal Procedure (Standard Idler Gear)	79
Important Safety Information	2
Inlet Air Temperature Sensor - Remove and Install	159
Installation Procedure	160
Removal Procedure	159
Inlet and Exhaust Valve Springs - Remove and Install	46
Installation Procedure	48
Removal Procedure	46
Inlet and Exhaust Valves - Remove and Install	50
Installation Procedure	51
Removal Procedure	50

L

Lifter Group - Remove and Install	112
Installation Procedure	112
Removal Procedure	112

P

Piston Cooling Jets - Remove and Install	129
Installation Procedure	129
Removal Procedure	129
Pistons and Connecting Rods - Assemble	132
Assembly Procedure	132
Pistons and Connecting Rods - Disassemble	131
Disassembly Procedure	131
Pistons and Connecting Rods - Install	134
Installation Procedure	134
Pistons and Connecting Rods - Remove	130
Removal Procedure	130
Position Sensor (Fuel Injection Pump) - Remove and Install	153
Installation Procedure	154
Removal Procedure	153

R

Rocker Shaft - Assemble	103
Assembly Procedure	103
Rocker Shaft - Disassemble	102
Disassembly Procedure	102
Rocker Shaft and Pushrod - Install	104
Installation Procedure	104
Rocker Shaft and Pushrod - Remove	101
Removal Procedure	101

T

Table of Contents	3
Turbocharger - Install (Side Mounted Turbochargers)	40
Installation Procedure	40
Turbocharger - Install (Top Mounted Turbocharger)	38
Installation Procedure	38
Turbocharger - Remove (Side Mounted Turbochargers)	37
Removal Procedure	37
Turbocharger - Remove (Top Mounted Turbocharger)	35
Removal Procedure	35

V

V-Belts - Remove and Install (Engines Without an Automatic Belt Tensioner)	161
Installation Procedure	162
Removal Procedure	161
Vacuum Pump - Remove and Install	177
Installation Procedure	177
Removal Procedure	177
Valve Mechanism Cover - Remove and Install	96
Installation Procedure	97
Removal Procedure	96
Valve Mechanism Cover Base - Remove and Install	98
Installation Procedure	99
Removal Procedure	98

W

Wastegate Solenoid - Remove and Install	41
Installation Procedure	42
Removal Procedure	41
Water Pump - Install	62
Installation Procedure	62
Water Pump - Remove	61
Removal Procedure	61
Water Temperature Regulator - Remove and Install	63
Installation Procedure	64
Removal Procedure	63

